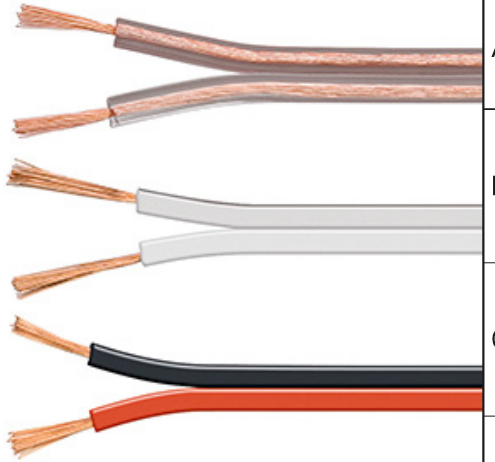
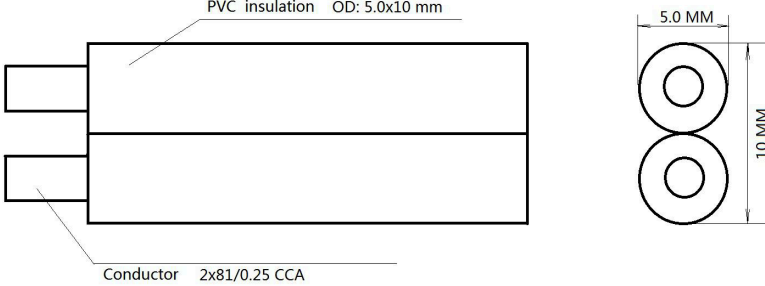


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
A	Artikel-Nr. / Item No.		Beschreibung / Description		Länge / Length (m)		Farbe / Color		Verpackungstyp / Packaging type						A
	67726		LSK 2x4,0 10m transparent CCA		10		transparent		Kabelring / Cable ring-coil						
	67727		LSK 2x4,0 25m transparent CCA		25		transparent		Kabelring / Cable ring-coil						
	67729		LSK 2x4,0 50m transparent CCA		50		transparent		Kabelring / Cable ring-coil						
B	15021		LSK 2x4,0 100m transparent CCA		100		transparent		Spule-Trommel / Cable spool-drum						
	67741		LSK 2x4,0 10m weiss CCA		10		weiß / white		Kabelring / Cable ring-coil						B
	67742		LSK 2x4,0 25m weiss CCA		25		weiß / white		Kabelring / Cable ring-coil						
	67743		LSK 2x4,0 50m weiss CCA		50		weiß / white		Kabelring / Cable ring-coil						
	15138		LSK 2x4,0 100m weiss CCA		100		weiß / white		Spule-Trommel / Cable spool-drum						
C	67738		LSK 2x4,0 10m rot/schwarz CCA		10		rot schwarz / red black		Kabelring / Cable ring-coil						C
	67739		LSK 2x4,0 25m rot/schwarz CCA		25		rot schwarz / red black		Kabelring / Cable ring-coil						
	67740		LSK 2x4,0 50m rot/schwarz CCA		50		rot schwarz / red black		Kabelring / Cable ring-coil						
	15025		LSK 2x4,0 100m rot/schwarz CCA		100		rot schwarz / red black		Spule-Trommel / Cable spool-drum						
D							Lautsprecherkabel - Für Hi-Fi-, Heimkino- und Lautsprechersysteme - Flexibles CCA-Lautsprecherkabel für einfache Verlegung - Polaritätskennzeichnung für korrektes Anschließen - Robuste PVC-Ummantelung - CPR-konform, Brandschutzklasse Eca - Meterware zur individuellen Konfektionierung Innerleiter, Aderquerschnitt: Durchmesser Kabelmantel (ca.): Kabelaufbau: 4 mm² 5 mm 2x81 / 0,25mm (5,0 x 10,0mm OD) Max. Gleichstromwiderstand des Leiters bei 20 °C: Nennspannung: Nennbetriebstemperatur: Brandklasse (BauPVO/CPR): Innenleiter, Material: Material: 0,008 Ω/m ≤ 36 V 70 °C Eca CCA (kupferkaschiertes Aluminium) PVC Speaker Cable - For hi-fi, home cinema and speaker systems - Flexible CCA speaker cable for easy installation - Polarity marking for correct connection - Durable PVC jacket - CPR-compliant, Eca fire classification - Supplied by the metre for custom termination Inner conductor cross-section: Cable sheath diameter (approx.): Cable structure: 4 mm² 5 mm 2x81 / 0.25mm (5.0 x 10.0mm OD) Max. Conductor DC Resistance at 20°C: Rated Voltage: Rated Temperature: Fire class (CPR): Inner conductor material: Material: 0.008 Ω/m ≤ 36 V 70 °C Eca CCA (copper-clad aluminium) PVC								D
E															
F															F
G															G
H															H
I	Änderungen				Datum		Name		Bezeichnung				Blatt		I
	Datum		Name		gez.:	13.08.2026	fw	LSK 2x4,0 XXXm XXXXXXXX CCA 				1			
					gepr.:	13.08.2026	fw								
					Norm:			Zeichnungs-Nr.:				von			
J					Änderungen vorbehalten / Subject to change								1		J
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	