
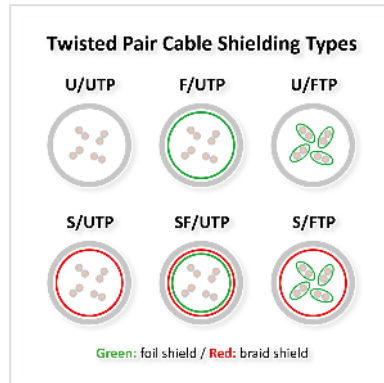


# ROLINE S/FTP Cable Cat.5e (Class D), Stranded Wire, 300 m

|                           |               |
|---------------------------|---------------|
| <b>Product No.</b>        | 21.15.0321    |
| <b>Manufacturer</b>       | ROLINE        |
| <b>Manufacturer No.</b>   | 21.15.0321    |
| <b>EAN (single piece)</b> | 7611990135912 |

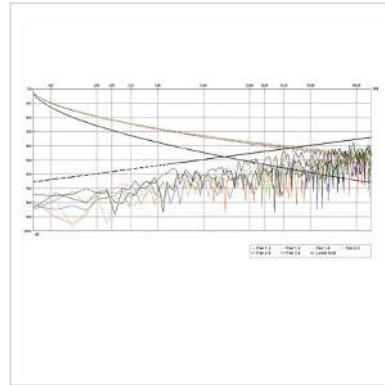

**Cat.5e**  
Class D

- Structured building wiring
- Impedance: 100 Ohm
- Colour: Grey
- Construction 21.15.0321: 8 lines, copper, stranded wire AWG26, screening: alu-laminated foil, shielding: copper braid
- Diagram: attenuation/near end crosstalk

For a structured cabling system we recommend to use the following components:

ROLINE Cat.5e S/FTP Cable, Solid Wire, AWG24: 21.15.0019 (100 m), 21.15.0020 (300 m)

ROLINE Cat.5e Flush/Surface Mount Wall Jack, shielded: 25.16.8487 (white), 25.16.8486 (ivory)/25.16.8387 (white), 25.16.8386 (ivory)

ROLINE Cat.5e 19" Patch Panel, 24 Ports, shielded: 26.11.0329 (light grey), 26.11.0328 (black)

ROLINE Cat.5e S/FTP Patch Cord, grey, 5 m: 21.15.0305

Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

**Remark: Picture similar**

| Technical specifications           |                    |
|------------------------------------|--------------------|
| Manufacturer                       | ROLINE             |
| Product group                      | Twisted Pair Cable |
| Product type                       | Raw cable Cat.5e   |
| Colour                             | grey               |
| Length                             | 300 m              |
| Contents                           | 300 m              |
| Shield type                        | SF/UTP             |
| Transfer quality                   | Cat5e / Class D    |
| Impedance                          | 100 Ohm            |
| Quantity of wires                  | 8                  |
| Conductor cross section (AWG)      | AWG 26             |
| Inner conductor material           | BC (Bare Copper)   |
| Conductor type                     | Stranded           |
| Cable LSOH                         | no                 |
| Material (external cable mantle)   | PVC                |
| Weight                             | 11.27 kg           |
| Height of packaging (single piece) | 200 mm             |
| Width of packaging (single piece)  | 400 mm             |
| Depth of packaging (single piece)  | 400 mm             |
| Package weight (single piece)      | 11.6 kg            |