
ROLINE SF/UTP Patch Cord Cat.5e (Class D), blue, 2 m

Product No.	21.15.0344
Manufacturer	ROLINE
Manufacturer No.	21.15.0344
EAN (single piece)	7611990167159





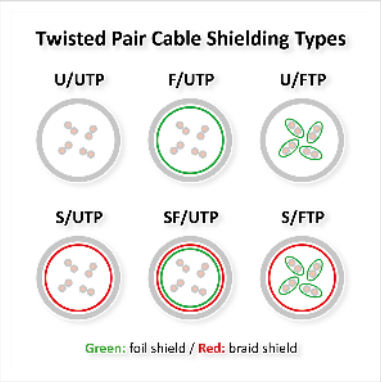

Cat.5e Class D

SF/UTP

Patch cable for networking connections between devices. Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. High quality plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded copper wire. Complete braid shielding and aluminium clad polyester foil.

For a structured cabling system we recommend to use the following components: ROLINE Cat.5e S/FTP Cable, Solid Wire, AWG24: 21.15.0019 (100 m), 21.15.0020 (300 m); ROLINE Cat.5e Flush/Surface Mount Wall Jack, shielded: 25.16.8487 (white), 25.16.8486 (ivory)/25.16.8387 (white), 25.16.8386 (ivory); ROLINE Cat.5e 19" Patch Panel, 24 Ports, shielded: 26.11.0329 (light grey), 26.11.0328 (black); ROLINE Cat.5e S/FTP Patch Cord, grey, 5 m: 21.15.0305. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

Technical specifications	
Manufacturer	ROLINE
Product group	Twisted Pair Cable
Product type	SF/UTP patch cord
Colour	blue

Length	2 m
Shield type	SF/UTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Power over Ethernet (PoE)	yes
Inner conductor material	BC (Bare Copper)
Conductor type	Stranded
Crossed	no
Locking lever	no
Anti-kink sleeve	Moulded-on
Colour (Spout)	blue
Cable LSOH	no
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Weight	74.2 g
Height of packaging (single piece)	30 mm
Width of packaging (single piece)	120 mm
Depth of packaging (single piece)	130 mm
Package weight (single piece)	0.068 kg