
ROLINE UTP Patch Cord Cat.5e (Class D), PoE, blue, 1 m

Product No.	21.15.0534
Manufacturer	ROLINE
Manufacturer No.	21.15.0534
EAN (single piece)	7611990134755







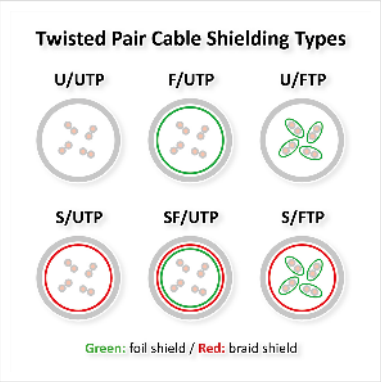





RJ45 patch cable for network, LAN and Ethernet connections with PoE support. Flexible unshielded UTP patch cord with gold-plated RJ-45 connectors, moulded kink protection and 4-pair stranded copper wire.

Patch cable for networking connections between devices. Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. High quality plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded copper wire.

For a structured cabling system we recommend to use the following components: ROLINE Cat.5e UTP Cable, Solid Wire, AWG24: 21.15.0512 (100 m), 21.15.0511 (300 m); ROLINE Cat.5e Flush/Surface Mount Wall Jack, unshielded: 25.16.8506 (white), 25.16.8501 (ivory)/25.16.8406 (white), 25.16.8401 (ivory); ROLINE Cat.5e 19" Patch Panel, 24 Ports, unshielded: 26.11.0349 (black), 26.11.0347 (light grey); ROLINE Cat.5e UTP Patch Cord, grey, 5 m: 21.15.0505. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

Technical specifications

Manufacturer	ROLINE

Product group	Twisted Pair Cable
Product type	U/UTP patch cord
Colour	blue
Length	1 m
Shield type	U/UTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Power over Ethernet (PoE)	yes
Inner conductor material	BC (Bare Copper)
Conductor type	Stranded
Crossed	no
Locking lever	no
Anti-kink sleeve	Moulded-on
Colour (Spout)	blue
Cable LSOH	no
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Weight	34.2 g
Height of packaging (single piece)	20 mm
Width of packaging (single piece)	100 mm

Depth of packaging (single piece)	120 mm
Package weight (single piece)	0.034 kg