


# ROLINE UTP Patch Cord, Cat.6 (Class E), yellow, 3 m

|                    |               |
|--------------------|---------------|
| Product No.        | 21.15.1552    |
| Manufacturer       | ROLINE        |
| Manufacturer No.   | 21.15.1552    |
| EAN (single piece) | 7611990156368 |

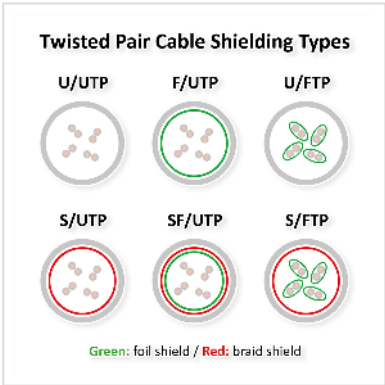

Cat.6  
Class E

U/UTP

Patch cable for networking connections between devices. Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. High quality plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded copper wire.

For a structured cabling system we recommend to use the following components: ROLINE Cat.6 UTP Cable, Solid Wire, AWG23: 21.15.0990 (100 m), 21.15.0991 (300 m); ROLINE Cat.6 Flush Mount Wall Jack, unshielded: 25.16.8494 (white), 25.16.8500 (ivory); ROLINE Cat.6 Surface Mount Wall Jack, unshielded: 25.16.8394 (white), 25.16.8395 (ivory); ROLINE Cat.6 19" Patch Panel, 24 Ports, unshielded: 26.11.0355 (light grey), 26.11.0362 (black); ROLINE Cat.6 UTP Patch Cord, grey, 5 m: 21.15.0935. The accredited German laboratory GHMT has tested and certified this product combination, in a Channel of 100 meters, as being compliant to Class E specifications; certificate no. z2329b-10-E (with flush mount)/z2330b-10-E (with surface mount).

| Technical specifications |                    |
|--------------------------|--------------------|
| Manufacturer             | ROLINE             |
| Product group            | Twisted Pair Cable |
| Product type             | U/UTP patch cord   |

|                                    |                  |
|------------------------------------|------------------|
| Colour                             | yellow           |
| Length                             | 3 m              |
| Shield type                        | U/UTP            |
| Transfer quality                   | Cat6 / Class E   |
| Impedance                          | 100 Ohm          |
| Quantity of wires                  | 8                |
| Conductor cross section (AWG)      | AWG 24           |
| Power over Ethernet (PoE)          | yes              |
| Inner conductor material           | BC (Bare Copper) |
| Conductor type                     | Stranded         |
| Crossed                            | no               |
| Locking lever                      | no               |
| Anti-kink sleeve                   | Moulded-on       |
| Colour (Spout)                     | yellow           |
| Cable LSOH                         | no               |
| Side 1 Connector Type              | RJ-45            |
| Side 1 Connector Gender            | Male             |
| Side 2 Connector Type              | RJ-45            |
| Side 2 Connector Gender            | Male             |
| Connector Type RJ45                | Standard         |
| Weight                             | 111.9 g          |
| Height of packaging (single piece) | 30 mm            |
| Width of packaging (single piece)  | 150 mm           |
| Depth of packaging (single piece)  | 180 mm           |

|                               |         |
|-------------------------------|---------|
| Package weight (single piece) | 0.12 kg |
|-------------------------------|---------|