


# ROLINE U/FTP DataCenter Patch Cord Cat.6A (Class EA), LSOH, slim, white, 1 m

|                    |               |                                                                                                                  |
|--------------------|---------------|------------------------------------------------------------------------------------------------------------------|
| Product No.        | 21.15.1701    | <br>Designed for Professionals |
| Manufacturer       | ROLINE        |                                                                                                                  |
| Manufacturer No.   | 21.15.1701    |                                                                                                                  |
| EAN (single piece) | 7630049610675 |                                                                                                                  |





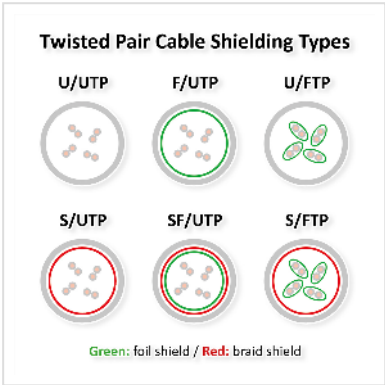





**Category 6a twisted-pair patch cable with shielded RJ-45 connectors on both sides. Particularly thin and flexible cable with individual pairs of wires in aluminium-laminated foil for use in confined spaces, such as in data centres.**

- Durable thanks to moulded-on kink protection
- Suitable as patch cable in patch panels or as device connection cable and intended for use in the LAN
- Contact assignment: 1:1 according to EIA/TIA568, 8 cores
- Structure: 8 cores stranded wire, pairs shielded with alu-laminated foil

| Technical specifications |                    |
|--------------------------|--------------------|
| Manufacturer             | ROLINE             |
| Product group            | Twisted Pair Cable |
| Product type             | U/FTP patch cord   |
| Colour                   | white              |
| Length                   | 1 m                |
| Shield type              | U/FTP              |

|                                       |                  |
|---------------------------------------|------------------|
| Transfer quality                      | Cat6A / Class EA |
| Quantity of wires                     | 8                |
| Conductor cross section<br>(AWG)      | AWG 32           |
| Inner conductor material              | BC (Bare Copper) |
| Conductor type                        | Stranded         |
| Crossed                               | no               |
| Slim cable                            | yes              |
| Locking lever                         | yes              |
| Anti-kink sleeve                      | Moulded-on       |
| Colour (Spout)                        | white            |
| Cable LSOH                            | yes              |
| Side 1 Connector Type                 | RJ-45            |
| Side 1 Connector<br>Gender            | Male             |
| Side 2 Connector Type                 | RJ-45            |
| Side 2 Connector<br>Gender            | Male             |
| Connector Type RJ45                   | Standard         |
| Operating temperature<br>min.         | -10 °C           |
| Operating temperature<br>max.         | 60 °C            |
| Weight                                | 17.4 g           |
| Height of packaging<br>(single piece) | 10 mm            |
| Width of packaging<br>(single piece)  | 100 mm           |
| Depth of packaging<br>(single piece)  | 100 mm           |
| Package weight (single<br>piece)      | 0.02 kg          |