
ROLINE S/FTP Patch Cord Cat.6A, Component Level, LSOH, grey, 0.5 m

Product No.	21.15.2800
Manufacturer	ROLINE
Manufacturer No.	21.15.2800
EAN (single piece)	7611990152827





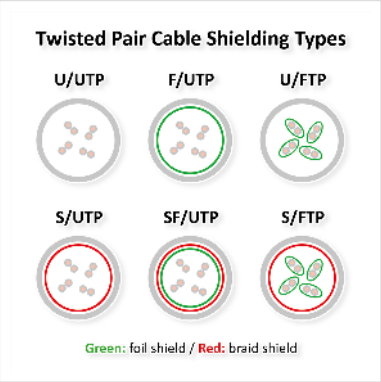

Pre-terminated, double-shielded (PiMF) Category 6A network cable with shielded RJ45 connectors on both ends. Suitable for use as a patch cable in patch panels or as a device connection cable, and designed for 10 Gigabit Ethernet applications in LAN environments. Each cable is 100% component-tested to ensure reliable, standards-compliant performance.

- Patch cable for networking connections between devices.
- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends.
- Durable due to moulded kink protection.
- Flexible cable, suitable for narrow bending.
- High quality plugs with gold plated contacts.
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard.
- Construction: 4-pair stranded copper wire.
- Complete braid shielding. Pairs shielded with aluminium clad polyester foil.

100% Component Level testing

- GHMT Certificate No. c9394a-25

Technical specifications

Manufacturer	ROLINE
Product group	Twisted Pair Cable
Product type	S/FTP patch cord (PiMF)
Colour	grey
Length	0.5 m
Shield type	S/FTP (PiMF)
Transfer quality	Cat6A / Class EA
Component-Level certified	yes
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Power over Ethernet (PoE)	yes
Inner conductor material	BC (Bare Copper)
Conductor type	Stranded
Crossed	no
Locking lever	yes
Anti-kink sleeve	Moulded-on
Colour (Spout)	grey
Cable LSOH	yes
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Weight	28.3 g
Height of packaging (single piece)	10 mm

Width of packaging (single piece)	130 mm
Depth of packaging (single piece)	130 mm
Package weight (single piece)	0.036 kg