
# ROLINE S/FTP Patch Cord Cat.6A, Component Level, LSOH, grey, 15 m

| | |
|---|---|
| **Product No.** | 21.15.2808 |
| **Manufacturer** | ROLINE |
| **Manufacturer No.** | 21.15.2808 |
| **EAN (single piece)** | 7611990153008 |





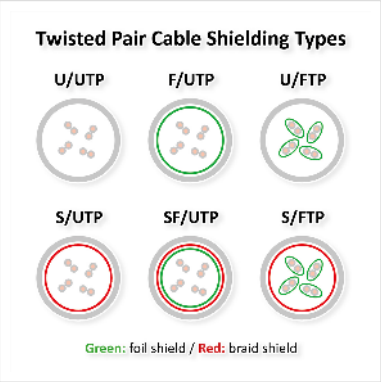


**Pre-terminated, double-shielded (PiMF) Category 6A network cable with shielded RJ45 connectors on both ends. Suitable for use as a patch cable in patch panels or as a device connection cable, and designed for 10 Gigabit Ethernet applications in LAN environments. Each cable is 100% component-tested to ensure reliable, standards-compliant performance.**

- Patch cable for networking connections between devices.
- Prepared double shielded Twisted Pair cable with screened RJ-45 connectors on both ends.
- Durable due to moulded kink protection.
- Flexible cable, suitable for narrow bending.
- High quality plugs with gold plated contacts.
- Contact settings 1:1, in accordance with the EIA/TIA 568 standard.
- Construction: 4-pair stranded copper wire.
- Complete braid shielding. Pairs shielded with aluminium clad polyester foil.

**100% Component Level testing**

- GHMT Certificate No. c9394a-25

## Technical specifications

| | |
|---|---|
| Manufacturer | ROLINE |
| Product group | Twisted Pair Cable |
| Product type | S/FTP patch cord (PiMF) |
| Colour | grey |
| Length | 15 m |
| Shield type | S/FTP (PiMF) |
| Transfer quality | Cat6A / Class EA |
| Component-Level certified | yes |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 26 |
| Inner conductor material | BC (Bare Copper) |
| Conductor type | Stranded |
| Crossed | no |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Colour (Spout) | grey |
| Cable LSOH | yes |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Weight | 556.1 g |
| Height of packaging (single piece) | 60 mm |
| Width of packaging (single piece) | 190 mm |

| | |
|---|---|
| Depth of packaging (single piece) | 200 mm |
| Package weight (single piece) | 0.55 kg |