
# ROLINE GREEN U/FTP DataCenter Patch Cord Cat.6A (Class EA), LSOH, slim, grey, 5 m

| | |
|---|---|
| **Product No.** | 21.44.3307 |
| **Manufacturer** | ROLINE GREEN |
| **Manufacturer No.** | 21.44.3307 |
| **EAN (single piece)** | 7630049624313 |





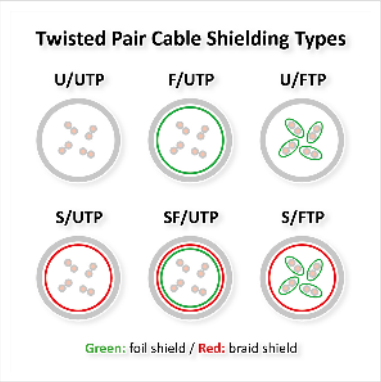


**Category 6a twisted-pair patch cable with shielded RJ-45 connectors on both sides. Particularly thin and flexible cable with individual pairs of wires in aluminium-laminated foil for use in confined spaces, such as in data centres.**

• Durable thanks to moulded-on kink protection
• Suitable as patch cable in patch panels or as device connection cable and intended for use in the LAN
• Contact assignment: 1:1 according to EIA/TIA568, 8 cores
• Structure: 8 cores stranded wire, pairs shielded with alu-laminated foil

**ROLINE GREEN products are marked only with a paper tag and build with halogen-free TPE material, without plastic bags and without plastic cable straps for use in eco-friendly environments.**

| Technical specifications | |
|---|---|
| Manufacturer | ROLINE GREEN |
| Product group | Twisted Pair Cable |
| Product type | U/FTP patch cord |

| | |
|---|---|
| Colour | grey |
| Length | 5 m |
| Scope of delivery | Cable without plastic bag, only marked with a paper label |
| Shield type | U/FTP |
| Transfer quality | Cat6A / Class EA |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 32 |
| Inner conductor material | BC (Bare Copper) |
| Conductor type | Stranded |
| Crossed | no |
| Slim cable | yes |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Colour (Spout) | grey |
| Cable LSOH | yes |
| Material (external cable mantle) | LSOH-TPE |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Operating temperature min. | -10 °C |
| Operating temperature max. | 60 °C |
| Storage temperature min. | -20 °C |

| | |
|---|---|
| Storage temperature max. | 75 °C |
| Weight | 77.1 g |
| Height of packaging (single piece) | 30 mm |
| Width of packaging (single piece) | 100 mm |
| Depth of packaging (single piece) | 100 mm |
| Package weight (single piece) | 0.08 kg |