


# ROLINE GREEN U/FTP DataCenter Patch Cord Cat.6A (Class EA), LSOH, slim, yellow, 0.15 m

**Product No.** 21.44.3320  
**Manufacturer** ROLINE GREEN  
**Manufacturer No.** 21.44.3320  
**EAN (single piece)** 7630049624405

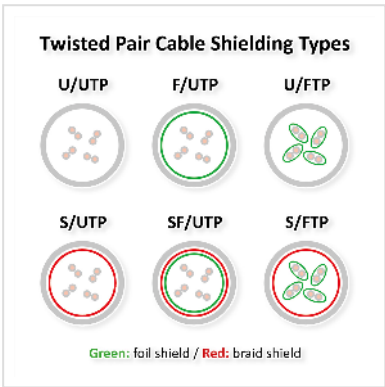

Cat.6A  
Class EA

U/FTP

DATA CENTER  
Product

LSOH

**Category 6a twisted-pair patch cable with shielded RJ-45 connectors on both sides. Particularly thin and flexible cable with individual pairs of wires in aluminium-laminated foil for use in confined spaces, such as in data centres.**

- Durable thanks to moulded-on kink protection
- Suitable as patch cable in patch panels or as device connection cable and intended for use in the LAN
- Contact assignment: 1:1 according to EIA/TIA568, 8 cores
- Structure: 8 cores stranded wire, pairs shielded with alu-laminated foil

**ROLINE GREEN products are marked only with a paper tag and build with halogen-free TPE material, without plastic bags and without plastic cable straps for use in eco-friendly environments.**

| Technical specifications |                    |
|--------------------------|--------------------|
| Manufacturer             | ROLINE GREEN       |
| Product group            | Twisted Pair Cable |
| Product type             | U/FTP patch cord   |

|                                  |                                                           |
|----------------------------------|-----------------------------------------------------------|
| Colour                           | yellow                                                    |
| Length                           | 0.15 m                                                    |
| Scope of delivery                | Cable without plastic bag, only marked with a paper label |
| Shield type                      | U/FTP                                                     |
| Transfer quality                 | Cat6A / Class EA                                          |
| Quantity of wires                | 8                                                         |
| Conductor cross section (AWG)    | AWG 32                                                    |
| Inner conductor material         | BC (Bare Copper)                                          |
| Conductor type                   | Stranded                                                  |
| Crossed                          | no                                                        |
| Slim cable                       | yes                                                       |
| Locking lever                    | yes                                                       |
| Anti-kink sleeve                 | Moulded-on                                                |
| Colour (Spout)                   | yellow                                                    |
| Cable LSOH                       | yes                                                       |
| Material (external cable mantle) | LSOH-TPE                                                  |
| Side 1 Connector Type            | RJ-45                                                     |
| Side 1 Connector Gender          | Male                                                      |
| Side 2 Connector Type            | RJ-45                                                     |
| Side 2 Connector Gender          | Male                                                      |
| Connector Type RJ45              | Standard                                                  |
| Operating temperature min.       | -10 °C                                                    |
| Operating temperature max.       | 60 °C                                                     |
| Storage temperature min.         | -20 °C                                                    |

|                                    |         |
|------------------------------------|---------|
| Storage temperature max.           | 75 °C   |
| Weight                             | 8.7 g   |
| Height of packaging (single piece) | 20 mm   |
| Width of packaging (single piece)  | 20 mm   |
| Depth of packaging (single piece)  | 20 mm   |
| Package weight (single piece)      | 0.01 kg |