
# VALUE S/FTP Patch Cord Cat.6 (Class E), halogen-free, blue, 1.5 m

| | |
|---|---|
| **Product No.** | 21.99.0715 |
| **Manufacturer** | VALUE |
| **Manufacturer No.** | 21.99.0715 |
| **EAN (single piece)** | 7611990113729 |





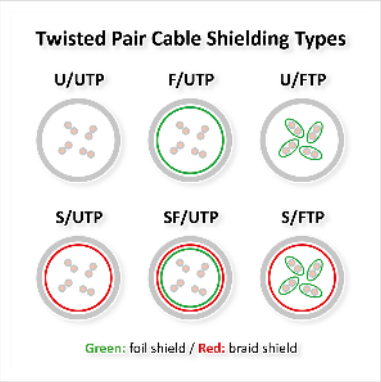


Prepared shielded Twisted Pair cable with RJ-45 connectors on both sides. Used as patch cable in wiring cabinet or as direct connection cable between devices. Flexible cable suitable for narrow bending. Contact settings 1:1, according to EIA/TIA 568, 8 wires. Construction: 8 wires stranded copper wire, braided shield. Impedance:100 Ohm. Cable jacketing: LSOH - Low Smoke Zero Halogen - cable emits limited smoke and no halogens when exposed to high sources of heat. For a structured cabling system we recommend to use the following components: ROLINE Cat.6 S/FTP Cable, Solid Wire, LSOH: 21.15.1889. VALUE Cat.6 Flush/Surface Mount Wall Jack, shielded, white: 25.99.8492/25.99.8392. VALUE Cat.6 19" Patch Panel, 24 Ports, shielded: 26.99.0353 (black), 26.99.0354 (grey). VALUE Cat.6 S/FTP Patch Cord, LSOH, grey, 5 m: 21.99.0705. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specifications.

| Technical specifications | |
|---|---|
| Manufacturer | VALUE |
| Product group | Twisted Pair Cable |
| Product type | S/FTP patch cord (PiMF) |
| Colour | blue |

| | |
|---|---|
| Length | 1.5 m |
| Shield type | S/FTP (PiMF) |
| Transfer quality | Cat6 / Class E |
| Impedance | 100 Ohm |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 28 |
| Power over Ethernet (PoE) | yes |
| Inner conductor material | BC (Bare Copper) |
| Conductor type | Stranded |
| Crossed | no |
| Assignment | 1:1 |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Colour (Spout) | blue |
| Cable LSOH | yes |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Weight | 49.2 g |
| Height of packaging (single piece) | 10 mm |
| Width of packaging (single piece) | 140 mm |
| Depth of packaging (single piece) | 140 mm |

| | |
|---|---|
| Package weight (single piece) | 0.052 kg |