



VALUE Outdoor S/FTP Patch Cord Cat.6A/Class EA, Solid, TPE, LSOH, black, 30 m

Product No.	21.99.0721
Manufacturer	VALUE
Manufacturer No.	21.99.0721
EAN (single piece)	7630049627437

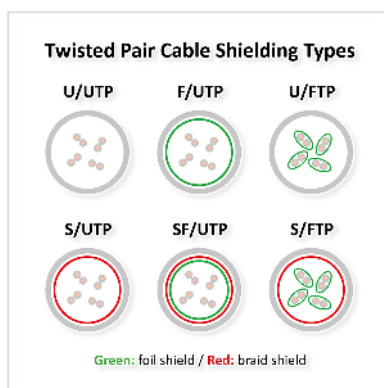

Patch cord for outdoor use, e.g. for connecting an IP camera

Patch cords for networking connections between devices in combination with outdoor application (e.g. connection to outdoor surveillance cameras)

- Assembled double shielded (PIMF) twisted pair cable made of solid wire in category 6A with shielded RJ-45 connectors on both sides.
- Suitable for connecting external components (e.g. IP cameras), but also for PoE applications or as TP extension cable in multimedia applications
- UV - resistant
- Durable thanks to molded bend protection
- Contact assignment: 1:1 according to EIA/TIA568, 8 cores
- Construction: 8 cores solid wire. Pair shielding: aluminum-clad polyester foil. Overall shielding: copper braiding
- High quality gold plated contacts

REMARK: NOT suitable for underground installation / application

Important: Not suitable for underground installation. RJ-45 connectors must be protected from the influence of the weather.

Technical specifications	
Manufacturer	VALUE
Product group	Twisted Pair Cable
Product type	S/FTP patch cord (PiMF)
Colour	black
Length	30 m
Shield type	S/FTP (PiMF)
Transfer quality	Cat6A / Class EA
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Power over Ethernet (PoE)	yes
Inner conductor material	BC (Bare Copper)
Conductor type	Solid wire
Crossed	no
Locking lever	yes
Anti-kink sleeve	Moulded-on
Cable LSOH	yes
Material (external cable mantle)	TPE
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Operating temperature min.	-40 °C
Operating temperature max.	60 °C

Weight	1053 g
Height of packaging (single piece)	50 mm
Width of packaging (single piece)	220 mm
Depth of packaging (single piece)	200 mm
Package weight (single piece)	0.875 kg