
# VALUE UTP Patch Cord, Cat.6 (Class E), white, 1.5 m

| | |
|---|---|
| **Product No.** | 21.99.0956 |
| **Manufacturer** | VALUE |
| **Manufacturer No.** | 21.99.0956 |
| **EAN (single piece)** | 7611990193738 |





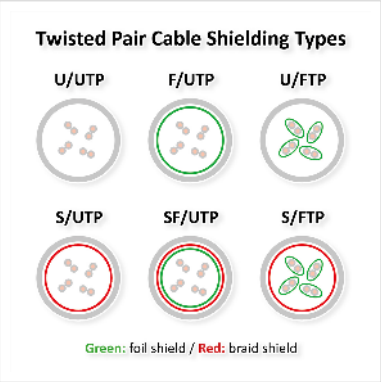


Cat.6 Class E

U/UTP

Patch cable for networking connections between devices. Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. Plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded wire.

For a structured cabling system we recommend to use the following components: VALUE Cat.6 UTP Cable, Solid Wire, AWG24, 300 m: 21.99.0995. VALUE Cat.6 Flush/Surface Mount Wall Jack, unshielded, white: 25.99.8494/25.99.8394; VALUE Cat.6 19" Patch Panel, 24 Ports, unshielded: 26.99.0351 (black), 26.99.0352 (grey); VALUE Cat.6 UTP Patch Cord, grey, 5 m: 21.99.0905. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specifications.

| Technical specifications | |
|---|---|
| Manufacturer | VALUE |
| Product group | Twisted Pair Cable |
| Product type | U/UTP patch cord |
| Colour | white |
| Length | 1.5 m |
| Shield type | U/UTP |

| | |
|---|---|
| Transfer quality | Cat6 / Class E |
| Impedance | 100 Ohm |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 24 |
| Power over Ethernet (PoE) | no |
| Inner conductor material | CCA (Copper Clad Aluminum) |
| Conductor type | Stranded |
| Crossed | no |
| Locking lever | no |
| Anti-kink sleeve | Moulded-on |
| Cable LSOH | no |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Weight | 46.9 g |
| Height of packaging (single piece) | 20 mm |
| Width of packaging (single piece) | 110 mm |
| Depth of packaging (single piece) | 120 mm |
| Package weight (single piece) | 0.04 kg |