
VALUE S/FTP Patch Cord Cat.6 (Class E), halogen-free, red, 3 m

Product No.	21.99.1251
Manufacturer	VALUE
Manufacturer No.	21.99.1251
EAN (single piece)	7611990113989





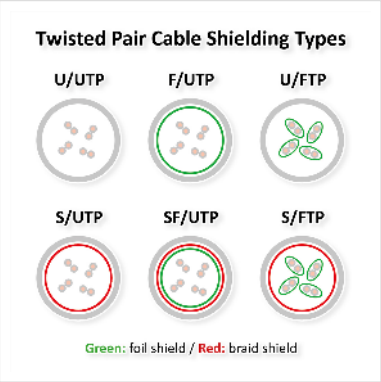

Cat.6 Class E S/FTP LSOH

Prepared shielded Twisted Pair cable with RJ-45 connectors on both sides. Used as patch cable in wiring cabinet or as direct connection cable between devices. Flexible cable suitable for narrow bending. Contact settings 1:1, according to EIA/TIA 568, 8 wires. Construction: 8 wires stranded copper wire, braided shield. Impedance:100 Ohm. Cable jacketing: LSOH - Low Smoke Zero Halogen - cable emits limited smoke and no halogens when exposed to high sources of heat. For a structured cabling system we recommend to use the following components: ROLINE Cat.6 S/FTP Cable, Solid Wire, LSOH: 21.15.1889. VALUE Cat.6 Flush/Surface Mount Wall Jack, shielded, white: 25.99.8492/25.99.8392. VALUE Cat.6 19" Patch Panel, 24 Ports, shielded: 26.99.0353 (black), 26.99.0354 (grey). VALUE Cat.6 S/FTP Patch Cord, LSOH, grey, 5 m: 21.99.0705. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specifications.

Technical specifications	
Manufacturer	VALUE
Product group	Twisted Pair Cable
Product type	S/FTP patch cord (PiMF)
Colour	red

Length	3 m
Shield type	S/FTP (PiMF)
Transfer quality	Cat6 / Class E
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 28
Power over Ethernet (PoE)	yes
Inner conductor material	BC (Bare Copper)
Conductor type	Stranded
Crossed	no
Assignment	1:1
Locking lever	yes
Anti-kink sleeve	Moulded-on
Colour (Spout)	red
Cable LSOH	yes
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Weight	91 g
Height of packaging (single piece)	25 mm
Width of packaging (single piece)	140 mm
Depth of packaging (single piece)	140 mm

Package weight (single piece)	0.09 kg