


# VALUE S/FTP (PiMF) Patch Cord, Cat.6 (Class E), red, 5 m

**Product No.** 21.99.1361  
**Manufacturer** VALUE  
**Manufacturer No.** 21.99.1361  
**EAN (single piece)** 7611990177585

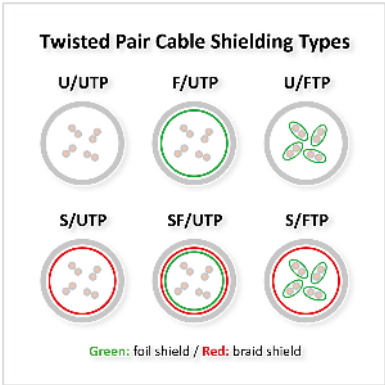

Prepared shielded Twisted Pair cable with RJ-45 connectors on both sides. Used as patch cable in wiring cabinet or as direct connection cable between devices. Flexible cable suitable for narrow bending. Contact settings 1:1, according to EIA/TIA 568, 8 wires. Construction: 8 wires stranded copper wire, braided shield. Impedance: 100 Ohm. For a structured cabling system we recommend to use the following components: ROLINE Cat.6 S/FTP Cable, Solid Wire, AWG23: 21.15.0890 (100 m), 21.15.0891 (300 m). VALUE Cat.6 Flush/Surface Mount Wall Jack, shielded, white: 25.99.8492/25.99.8392. VALUE Cat.6 19" Patch Panel, 24 Ports, shielded: 26.99.0353 (black), 26.99.0354 (grey). VALUE Cat.6 S/FTP Patch Cord, grey, 5 m: 21.99.0805. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specifications.

| Technical specifications |                         |
|--------------------------|-------------------------|
| Manufacturer             | VALUE                   |
| Product group            | Twisted Pair Cable      |
| Product type             | S/FTP patch cord (PiMF) |
| Colour                   | red                     |
| Length                   | 5 m                     |

|                                    |                  |
|------------------------------------|------------------|
| Shield type                        | S/FTP (PiMF)     |
| Transfer quality                   | Cat6 / Class E   |
| Impedance                          | 100 Ohm          |
| Quantity of wires                  | 8                |
| Conductor cross section (AWG)      | AWG 27           |
| Power over Ethernet (PoE)          | yes              |
| Inner conductor material           | BC (Bare Copper) |
| Conductor type                     | Stranded         |
| Crossed                            | no               |
| Assignment                         | 1:1              |
| Locking lever                      | no               |
| Anti-kink sleeve                   | Moulded-on       |
| Colour (Spout)                     | red              |
| Cable LSOH                         | no               |
| Side 1 Connector Type              | RJ-45            |
| Side 1 Connector Gender            | Male             |
| Side 2 Connector Type              | RJ-45            |
| Side 2 Connector Gender            | Male             |
| Connector Type RJ45                | Standard         |
| Operating temperature min.         | -20 °C           |
| Operating temperature max.         | 60 °C            |
| Weight                             | 137.1 g          |
| Height of packaging (single piece) | 25 mm            |
| Width of packaging (single piece)  | 234 mm           |

|                                      |          |
|--------------------------------------|----------|
| Depth of packaging<br>(single piece) | 234 mm   |
| Package weight (single<br>piece)     | 0.185 kg |