
# VALUE UTP Patch Cord Cat.6A (Class EA), blue, 2 m

| | |
|---|---|
| **Product No.** | 21.99.1452 |
| **Manufacturer** | VALUE |
| **Manufacturer No.** | 21.99.1452 |
| **EAN (single piece)** | 7611990120956 |







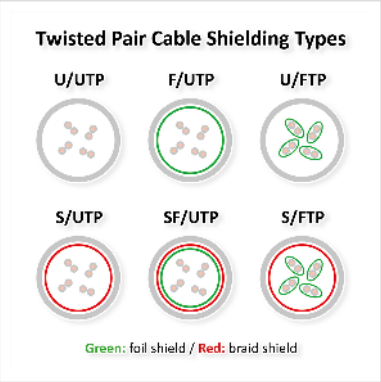






• The cheap solution for data transfer rates of up to 10 Gbit/s and a bandwidth of 500 MHz
• Patch cable for networking connections between devices
• Prepared shielded Twisted Pair cable (PiMF) with RJ-45 connectors on both ends.
• Durable due to moulded kink protection.
• Flexible cable, suitable for narrow bending.
• Impedance: 100 Ohm
• Contact settings 1:1, in accordance with the EIA/TIA 568 standard.
• Construction: 8 lines, pairs shielded with aluminium foil, complete shielding in tinned copper braid

**For a structured shielded Cat.6a cabling system we recommend to use the following components:**

VALUE Cat.6a UTP Cable, Solid Wire, 300 m: 21.99.1681
Flush Mount Wall Jack for Keystones: 25.16.8579
Surface Wall Mount Frame: 25.16.8484
VALUE Cat.6a Keystone, RJ-45, shielded: 26.99.0366
19" Keystone Patch Panel: 26.11.0358 / 26.11.0359
VALUE Cat.6a S/FTP Patch Cord, 5 m: 21.99.0875

## Technical specifications

| | |
|---|---|
| Manufacturer | VALUE |
| Product group | Twisted Pair Cable |
| Product type | U/UTP patch cord |
| Colour | blue |
| Length | 2 m |
| Shield type | U/UTP |
| Transfer quality | Cat6A / Class EA |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 24 |
| Power over Ethernet (PoE) | yes |
| Inner conductor material | BC (Bare Copper) |
| Conductor type | Stranded |
| Crossed | no |
| Assignment | 1:1 |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Colour (Spout) | blue |
| Cable LSOH | no |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C |

| | |
|---|---|
| Weight | 75.8 g |
| Height of packaging (single piece) | 30 mm |
| Width of packaging (single piece) | 120 mm |
| Depth of packaging (single piece) | 110 mm |
| Package weight (single piece) | 0.083 kg |