
VALUE UTP Patch Cord, Cat.6 (Class E), white, 5 m

Product No.	21.99.1566
Manufacturer	VALUE
Manufacturer No.	21.99.1566
EAN (single piece)	7611990193783





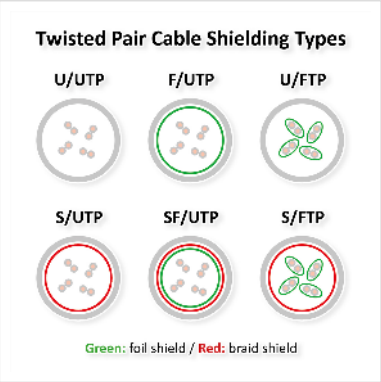

Cat.6 Class E

U/UTP

Patch cable for networking connections between devices. Prepared unshielded Twisted Pair cable with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. Plugs with gold plated contacts. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 4-pair stranded wire.

For a structured cabling system we recommend to use the following components: VALUE Cat.6 UTP Cable, Solid Wire, AWG24, 300 m: 21.99.0995. VALUE Cat.6 Flush/Surface Mount Wall Jack, unshielded, white: 25.99.8494/25.99.8394; VALUE Cat.6 19" Patch Panel, 24 Ports, unshielded: 26.99.0351 (black), 26.99.0352 (grey); VALUE Cat.6 UTP Patch Cord, grey, 5 m: 21.99.0905. Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class E specifications.

Technical specifications	
Manufacturer	VALUE
Product group	Twisted Pair Cable
Product type	U/UTP patch cord
Colour	white
Length	5 m
Shield type	U/UTP

Transfer quality	Cat6 / Class E
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 24
Power over Ethernet (PoE)	no
Inner conductor material	CCA (Copper Clad Aluminum)
Conductor type	Stranded
Crossed	no
Locking lever	no
Anti-kink sleeve	Moulded-on
Colour (Spout)	white
Cable LSOH	no
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Weight	143.6 g
Height of packaging (single piece)	30 mm
Width of packaging (single piece)	140 mm
Depth of packaging (single piece)	140 mm
Package weight (single piece)	0.14 kg