


# VALUE S/FTP Patch Cord Cat.6A (Class EA), yellow, 5 m

| | |
|---|---|
| **Product No.** | 21.99.1935 |
| **Manufacturer** | VALUE |
| **Manufacturer No.** | 21.99.1935 |
| **EAN (single piece)** | 7611990123001 |

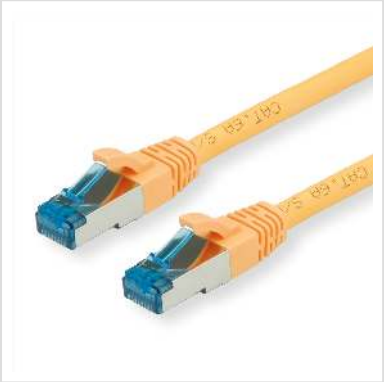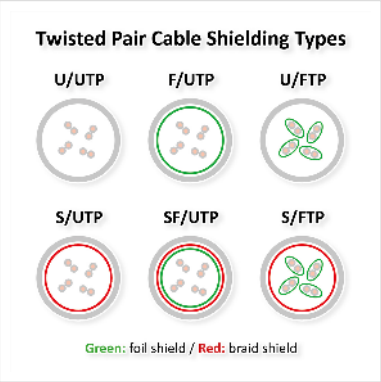

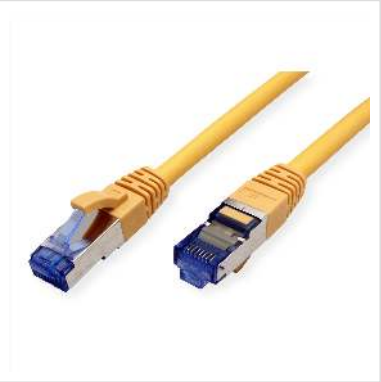

Cat.6A Class EA | S/FTP | LSOH

The cheap solution for data transfer rates of up to 10 Gbit/s and a bandwidth of 500 MHz. Patch cable for networking connections between devices. Prepared shielded Twisted Pair cable (PiMF) with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. Impedance: 100 Ohm. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 8 lines, pairs shielded with aluminium foil, complete braided shielding.

**For a structured shielded Cat.6a cabling system we recommend to use the following components:**

VALUE Cat.6a S/FTP Cable, Solid Wire, 100 m: 21.99.0881.
Flush Mount Wall Jack for Keystones: 25.16.8579.
Surface Wall Mount Frame: 25.16.8484.
VALUE Cat.6a Keystone, RJ-45, shielded: 26.99.0366.
19" Keystone Patch Panel: 26.11.0359.
VALUE Cat.6a S/FTP Patch Cord, 5 m: 21.99.0865.

| Technical specifications | |
|---|---|
| Manufacturer | VALUE |

| | |
|---|---|
| Product group | Twisted Pair Cable |
| Product type | S/FTP patch cord (PiMF) |
| Colour | yellow |
| Length | 5 m |
| Shield type | S/FTP (PiMF) |
| Transfer quality | Cat6A / Class EA |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 27 |
| Power over Ethernet (PoE) | yes |
| Inner conductor material | BC (Bare Copper) |
| Conductor type | Stranded |
| Crossed | no |
| Locking lever | yes |
| Anti-kink sleeve | Moulded-on |
| Colour (Spout) | yellow |
| Cable LSOH | yes |
| Side 1 Connector Type | RJ-45 |
| Side 1 Connector Gender | Male |
| Side 2 Connector Type | RJ-45 |
| Side 2 Connector Gender | Male |
| Connector Type RJ45 | Standard |
| Weight | 152.7 g |
| Height of packaging (single piece) | 20 mm |
| Width of packaging (single piece) | 200 mm |
| Depth of packaging (single piece) | 200 mm |

| | |
|---|---|
| Package weight (single piece) | 0.15 kg |