
VALUE S/FTP Patch Cord Cat.6A (Class EA), blue, 0.5 m

Product No.	21.99.1950
Manufacturer	VALUE
Manufacturer No.	21.99.1950
EAN (single piece)	7611990123148





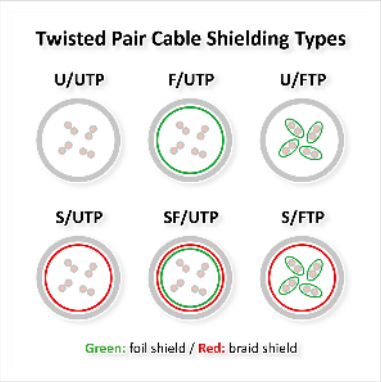

Cat.6A Class EA | S/FTP | LSOH

The cheap solution for data transfer rates of up to 10 Gbit/s and a bandwidth of 500 MHz. Patch cable for networking connections between devices. Prepared shielded Twisted Pair cable (PiMF) with RJ-45 connectors on both ends. Durable due to moulded kink protection. Flexible cable, suitable for narrow bending. Impedance: 100 Ohm. Contact settings 1:1, in accordance with the EIA/TIA 568 standard. Construction: 8 lines, pairs shielded with aluminium foil, complete braided shielding.

For a structured shielded Cat.6a cabling system we recommend to use the following components:

VALUE Cat.6a S/FTP Cable, Solid Wire, 100 m: 21.99.0881.
Flush Mount Wall Jack for Keystones: 25.16.8579.
Surface Wall Mount Frame: 25.16.8484.
VALUE Cat.6a Keystone, RJ-45, shielded: 26.99.0366.
19" Keystone Patch Panel: 26.11.0359.
VALUE Cat.6a S/FTP Patch Cord, 5 m: 21.99.0865.

Technical specifications	
Manufacturer	VALUE

Product group	Twisted Pair Cable
Product type	S/FTP patch cord (PiMF)
Colour	blue
Length	0.5 m
Shield type	S/FTP (PiMF)
Transfer quality	Cat6A / Class EA
Quantity of wires	8
Conductor cross section (AWG)	AWG 27
Power over Ethernet (PoE)	yes
Inner conductor material	BC (Bare Copper)
Conductor type	Stranded
Crossed	no
Locking lever	yes
Anti-kink sleeve	Moulded-on
Colour (Spout)	blue
Cable LSOH	yes
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	Standard
Weight	23.6 g
Height of packaging (single piece)	10 mm
Width of packaging (single piece)	170 mm
Depth of packaging (single piece)	130 mm

Package weight (single piece)	0.026 kg