


PIN OUT

P1		P2	P3
1		1	1
3		3	3
2		2	2
4		4	4
6		6	6
5		5	5
7		7	7
9		9	9
8		8	8
10		10	10
12		12	12
11		11	11
17		17	17
14		14	14
19		19	19
13		13	13
15		15	15
16		16	16
18		18	18

SHELL ———— SHELL

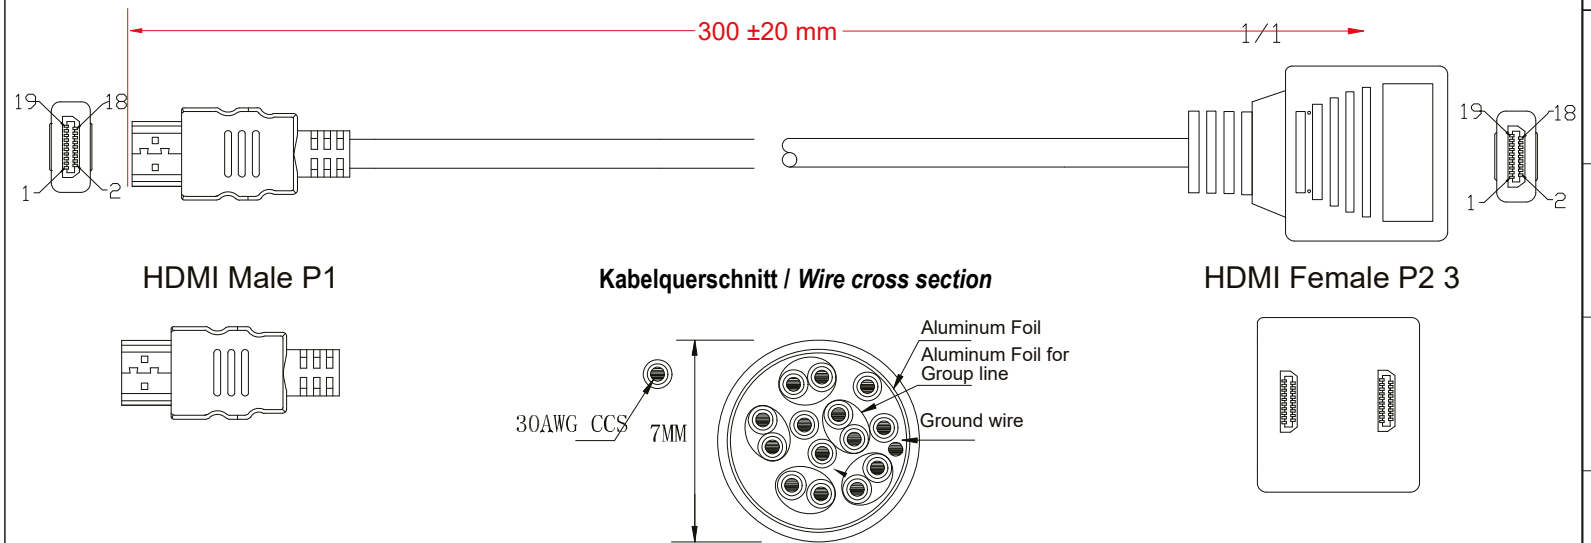

HDMI™-Stecker (Typ A) > 2x HDMI™-Buchse (Typ A)

- HDMI™-Splitter verteilt 1 HDMI™-Eingang auf 2 HDMI™-Ausgänge
- Geeignet für Geräte wie PC, Konsole, Kamera oder Beamer
- Ausgabe an Monitor, Projektor oder TV
- Unterstützt Full HD bis 1080p
- Vergoldete Kontakte für optimale Bild- und Tonqualität
- Kompatibel mit allen Geräten mit Standard-HDMI™-Anschluss

Anschlüsse:	2x HDMI™-Buchse (Typ A) HDMI™-Stecker (Typ A)
max. Auflösung:	Full HD 1080p (60 Hz)
Material:	ABS, PVC 88P, PVC
Isolationswiderstand:	300 V=, 10 MΩ min.
Leiterwiderstand:	max. 5 Ω
Kabel:	HDMI™ 1.4V Stecker / 2x Buchse (1P x 30#) x 5 + 4C x 30# + AL + D + B, Außendurchmesser 7,0 mm
Kabelmantel:	50P PVC, schwarz
HDMI-Stecker:	Eisengehäuse mit vergoldeten Kontakten

HDMI™ connector male (type A) > 2x HDMI™ female (Type A)

- HDMI™ splitter distributes 1 HDMI™ input to 2 HDMI™ outputs
- Suitable for devices such as PC, game console, camera, or projector
- Output to monitor, projector, or TV
- Supports Full HD resolutions up to 1080p
- Gold-plated contacts ensure optimal video and audio quality
- Compatible with all devices with a standard HDMI™ interface

Connectors:	2x HDMI™ jack (type A) HDMI™ plug (type A)
max. Resolution:	Full HD 1080p (60 Hz)
Material:	ABS, PVC 88P, PVC
Insulation resistance:	300 V==, 10 MΩ min.
Conductor resistance:	5 Ω max.
Cable:	HDMI™ 1.4V male / 2x female (1P x 30#) x 5 + 4C x 30# + AL + D + B, outer diameter 7.0 mm
Cable jacket:	50P PVC, black
HDMI connector:	Iron housing with gold-plated contacts

Änderungen			Datum	Name	Bezeichnung Adapter HDMI M/2xHDMI F G		Blatt
Datum	Name	gez.:	24.04.2026	fw			1
		gepr.:	24.04.2026	fw			
		Norm:			Zeichnungs-Nr.:		von
		Änderungen vorbehalten / <i>Subject to change</i>			68784		1