


DATASHEET

Power Cable CEE7/7 90° - C13 180°, Black 5.0 m, 3 x 1.00 mm²

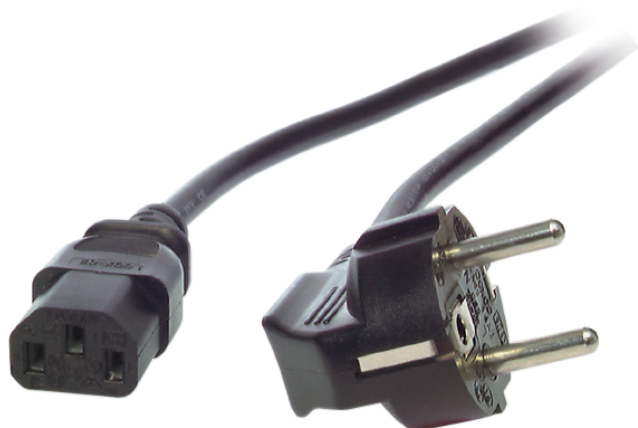

General data

The power cable from EFB-Elektronik in a black version is designed as a 5.0 m long connection with a right-angled safety plug (type F) and a straight IEC socket. It supports standard-compliant power connections for use in the European environment.

- 3-wire power cable with protective conductor
- Right-angled safety plug and straight IEC socket

The polyvinyl chloride (PVC) sheath ensures a robust and practical cable design. With a nominal voltage of 250 V and a nominal current of 10 A, the line is designed for common mains applications. The design with three wires and protective conductor makes it easy to integrate into existing installations.

Technical details

- Brand: EFB-Elektronik
- Connector 1: Safety plug (type F), right-angled
- Connector 1 angle: 90°
- Connection 2: IEC socket straight
- Connector 2 angle: 180°
- Core Count: 3
- Outer jacket colour: black
- Sheath material: Polyvinyl chloride (PVC)
- Nominal voltage: 250 V
- Rated current: 10 A
- Protective conductor available
- Country suitability: Europe

Technical properties

This datasheet was created automatically on 25-09-2026 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 90° - C13 180°, Black 5.0 m, 3 x 1.00 mm²

Cable printing	VDE H05VV-F 3G0.75mm ² ZHEJIANG JINTING NUCLEAR CABLE CO.,LTD. www.efb-elektronik.de CE
Colour outer sheath	black
Connection 1	Plug with protective contact (type F), right-angled
Connection 2	Cold device plug straight, female
Connector 1 angulation	90 °
Connector 2 angulation	180 °
Country suitability	Europe
Halogen free	False
Locking mechanism	False
Material outer sheath	PVC
Nominal voltage	250 V
Number of cores	3
Oil resistant (acc. EN 60811-2-1)	False
Oil resistant (according to EN 60811-404)	False
Plug imprint	JT008 VDE 250V 16A
Protective conductor	True
Security certificates	VDE
Spiralized cable	False
Type of packaging	Labeled polybag
Warranty	24 month
With cord switch	False

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Degree of protection	Length	Nominal current	Nominal voltage	Nominal cross section conductor	Outer diameter approx.
EK504.0,5V2	Power Cable CEE7/7 90° - C13 180° Black 0.5 m, 3 x 0.75 mm ²	black	IP20	0.5 m	10 A	250 V	0.75 mm ²	6.5 mm
EK504.0,75V2	Power Cable CEE7/7 90° - C13 180° Black 0.75 m, 3 x 0.75 mm ²	black	IP20	0.75 m	10 A	250 V	0.75 mm ²	6.5 mm
EK504.1V2	Power Cable CEE7/7 90° - C13 180° Black 1,0 m, 3 x 0.75 mm ²	black	IP20	1.0 m	10 A	250 V	0.75 mm ²	6.5 mm

This datasheet was created automatically on 25-09-2026 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 90° - C13 180°, Black 5.0 m, 3 x 1.00 mm²

EK504.2V2	Power Cable CEE7/7 90° - C13 180°, Black 2.0 m, 3 x 0.75 mm ²	black	IP20	2.0 m	10 A	250 V	0.75 mm ²	6.5 mm
EK504.3V2	Power Cable CEE7/7 90° - C13 180°, Black 3.0 m, 3 x 1.00 mm ²	black	IP20	3.0 m	10 A	250 V	1.0 mm ²	7.0 mm
EK504.5V2	Power Cable CEE7/7 90° - C13 180°, Black 5.0 m, 3 x 1.00 mm ²	black	IP20	5.0 m	10 A	250 V	1.0 mm ²	7.0 mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 25-09-2026 . Technical changes reserved.

