
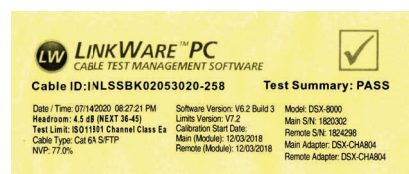


INLINE® PATCH CABLE, CAT.6A, S/FTP, TPE FLEXIBLE, BLACK

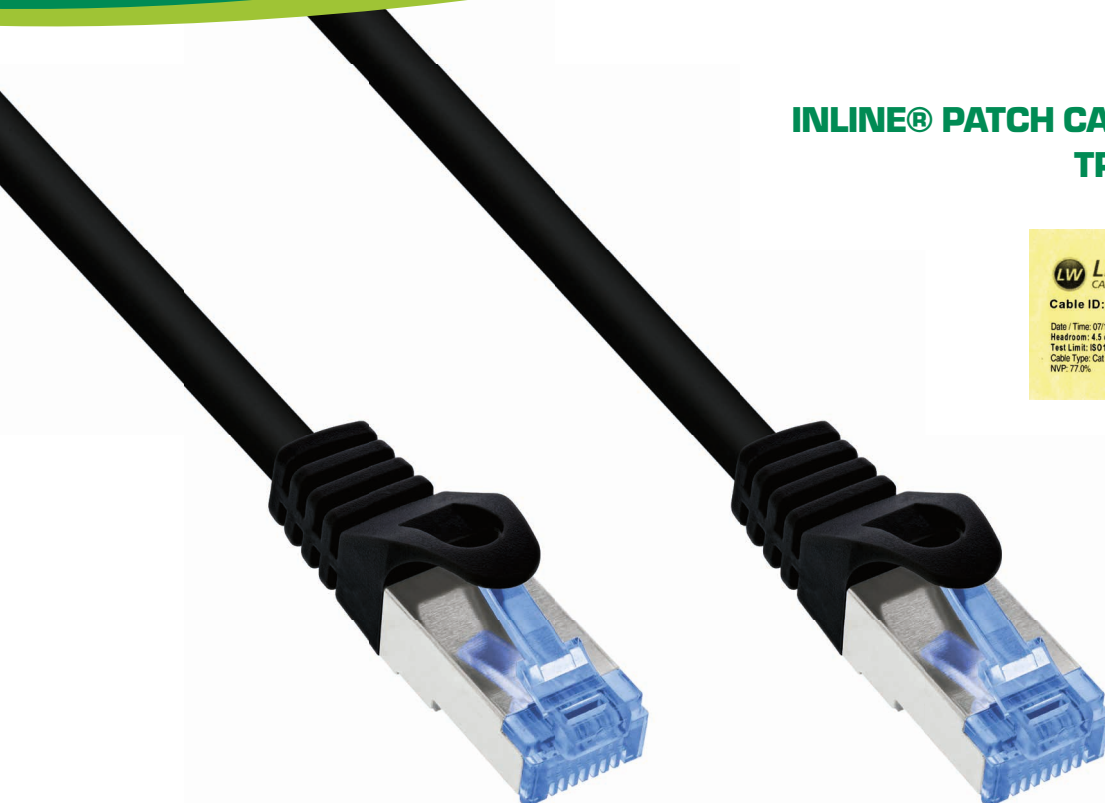


- Cat.6A patch cable
- S/FTP (PiMf) shielding, pairs in metal foil shielded with braid overall screen
- Cable with TPE sheath, halogen free
- Flexible cable, resistant
- provides super small bending radius to till min.10mm

- RJ45 plug on both sides, with blue-transparent dyed plastic
- Gold plated contacts, 750 cycles min.
- 4x2xAWG26 full copper strands
- Assignment 1:1, according to T568B
- Supports POE/POE+
- In resealable PE bag with EAN code

Technical Data	
Brand	InLine®
Category	Cable
Side A	RJ45 plug straight
Side B	RJ45 plug straight
Shielding	S/FTP (PiMf)
Type	Cat.6A
Signal	Network
Cross-section	AWG 26
Outer diameter	6.2 mm
UL	No
NVP value	77 %
Data transfer rate	10 Gb/s
PoE/PoE+/PoE++	Yes
Design	Round cable
Operation temperature	-10 to +60 °C
Packing	Retail
Conductor material	CU (copper)
Sheath	TPE
Assignment	1:1
Patch cable category	Cat.6A


Art. Nr.	Length	EAN
74822S	0,25 m	4043718333622
74833S	0,30 m	4043718333639
74855S	0,50 m	4043718259847
74801S	1 m	4043718259786
74814S	1,50 m	4043718259830
74802S	2 m	4043718259793
74803S	3 m	4043718259809
74805S	5 m	4043718259816
74807S	7,50 m	4043718259823
74800S	10 m	4043718259779
74815S	15 m	4043718259854
74820S	20 m	4043718259861
74825S	25 m	4043718282852
74830S	30 m	4043718282869
74840S	40 m	4043718282876
74850S	50 m	4043718282883

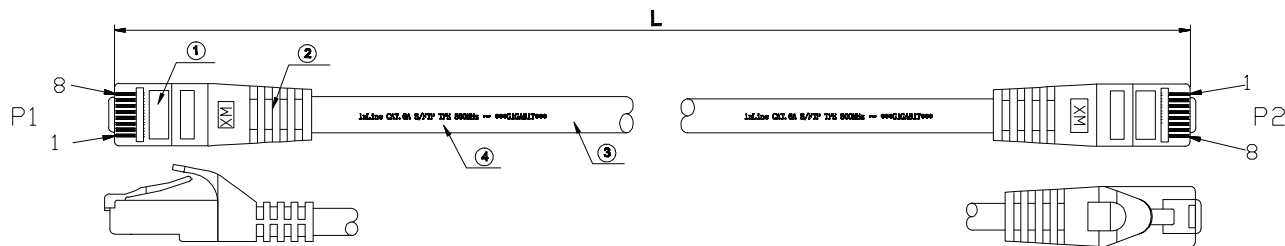

⑤	PACKAGE	InLine PE SELF SEALING BAG	1	PCS
④	PRINTING	InLine CAT. 6A S/FTP TPE 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2 ***GIGABIT***		
③	CABLE	S/FTP CAT. 6A (26AWG BC*1P+AL-FOIL)*4PAIRS+Braid AL-MG+CABLE JACKET:TPE/HALOGEN FREE, OD=6.2±0.2MM	1	PCS
②	MOLD HOOD	PVC, 75A	2	PCS
①	CONNECTOR	RJ45 8P8C PIN GOLD PLATED 3U", THE SHELL PLATED NICKEL, COLOR:TRANSPARENT BLUE	2	PCS
No.	PART NAME	DESCRIPTION	QTY	REMARK

NOTE:

- 1.ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
- 2.TEST LIMIT:ISO11801 Channel Class EA
- 3.Working temperature:-10℃ ~ + 60℃
- 4.Plug Contacts durability:750 cycles min
- 5.ROHS2.0 AND REACH COMPLIANT
- 6.TPE/HALOGEN FREE:Non fire retardant(Conform IEC60754-2)

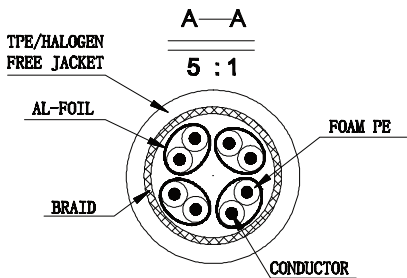

PIN OUT (568B-568B)			
P1		P2	
1	—	1	WHITE
2	—	2	ORANGE
3	—	3	WHITE
6	—	6	GREEN
4	—	4	BLUE
5	—	5	WHITE
7	—	7	WHITE
8	—	8	BROWN
SHELL	BRAID	SHELL	

ABBILDUNG ÄHNLICH
IMAGE SIMILAR