

INLINE® PATCH CABLE, CAT.6A, S/FTP, TPE FLEXIBLE, WHITE



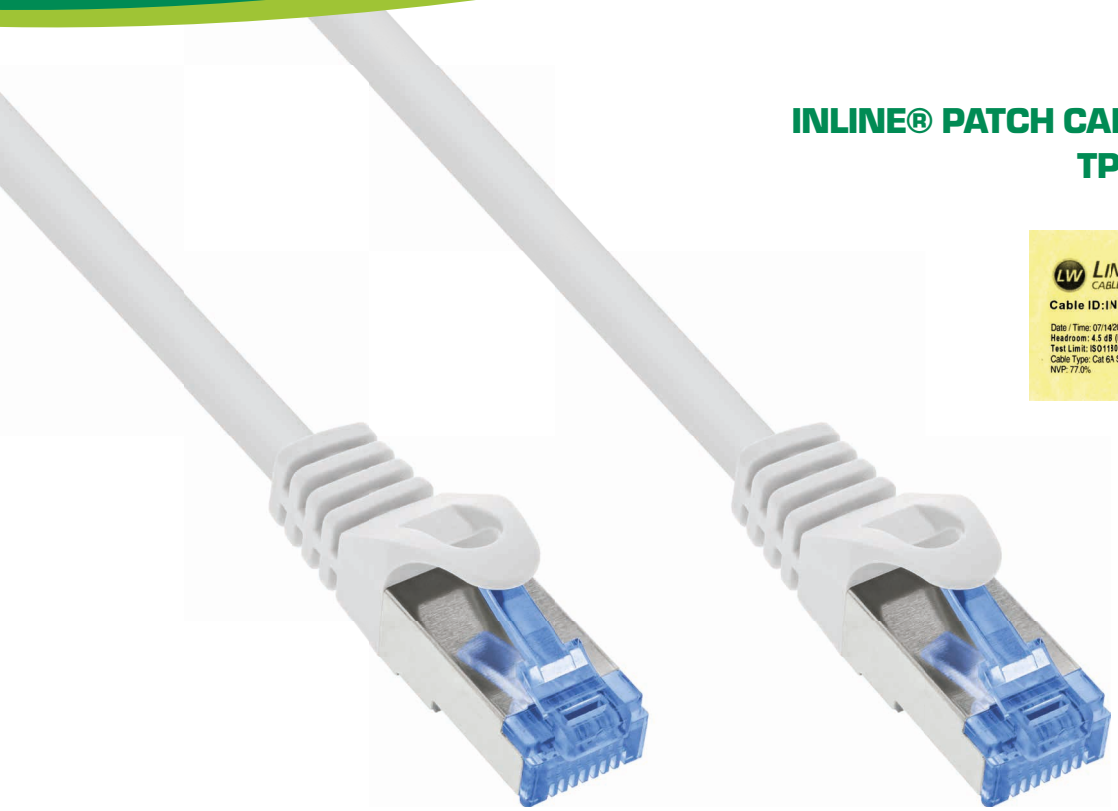


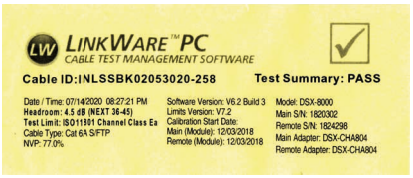

- Cat.6A patch cable
- S/FTP (PiMf) shielding, pairs in metal foil shielded with braid overall screen
- Cable with TPE sheath, halogen free
- Flexible cable, resistant
- provides super small bending radium to till min.10mm
- RJ45 plug on both sides, with blue-transparent dyed plastic
- Gold plated contacts, 750 cycles min.
- 4x2xAWG26 full copper strands
- Assignment 1:1, according to T568B
- Supports POE/POE+
- In resealable PE bag with EAN code

Technical Data	
Brand	InLine®
Category	Cable
Side A	RJ45 plug straight
Side B	RJ45 plug straight
Shielding	S/FTP (PiMf)
Type	Cat.6A
Signal	Network
Cross-section	AWG 26
Outer diameter	6.2 mm
UL	No
NVP value	77 %
Data transfer rate	10 Gb/s
PoE/PoE+/PoE++	Yes
Design	Round cable
Operation temperature	-10 to +60 °C
Packing	Retail
Conductor material	CU (copper)
Sheath	TPE
Assignment	1:1
Patch cable category	Cat.6A

Art. Nr.	Length	EAN
74822W	0,25 m	4043718333608
74833W	0,30 m	4043718333615
74855W	0,50 m	4043718292004
74801W	1 m	4043718291885
74814W	1,50 m	4043718291939
74802W	2 m	4043718291892
74803W	3 m	4043718291908
74805W	5 m	4043718291915
74807W	7,50 m	4043718291922
74800W	10 m	4043718291878
74815W	15 m	4043718291946
74820W	20 m	4043718291953
74825W	25 m	4043718291960
74830W	30 m	4043718291977
74840W	40 m	4043718291984
74850W	50 m	4043718291991

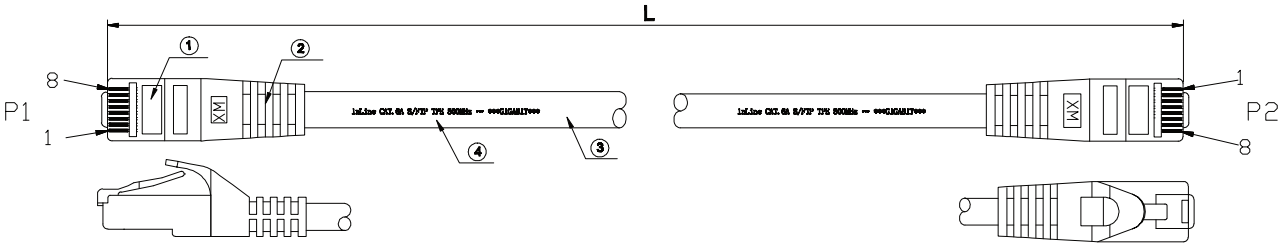

⑤	PACKAGE	InLine PE SELF SEALING BAG	1	PCS
④	PRINTING	InLine CAT.6A S/FTP TPE 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2 ***GIGABIT***		
③	CABLE	S/FTP CAT.6A (26AWG BC*1P+AL-FOIL)*4PAIRS+Braid AL-MG+CABLE JACKET:TPE/HALOGEN FREE,OD=6.2±0.2MM	1	PCS
②	MOLD HOOD	PVC,75A	2	PCS
①	CONNECTOR	RJ45 8P8C PIN GOLD PLATED 3U",THE SHELL PLATED NICKEL, COLOR:TRANSPARENT BLUE	2	PCS
No.	PART NAME	DESCRIPTION	QTY	REMARK

NOTE:
1. ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
2. TEST LIMIT:ISO11801 Channel Class EA
3. Working temperature:-10℃ ~ + 60℃
4. Plug Contacts durability:750 cycles min
5. ROHS2.0 AND REACH COMPLIANT
6. TPE/HALOGEN FREE:Non fire retardant(Conform IEC60754-2)

