
INLINE® PATCH CABLE S/FTP PIMF CAT.6 250MHZ PVC CCA YELLOW




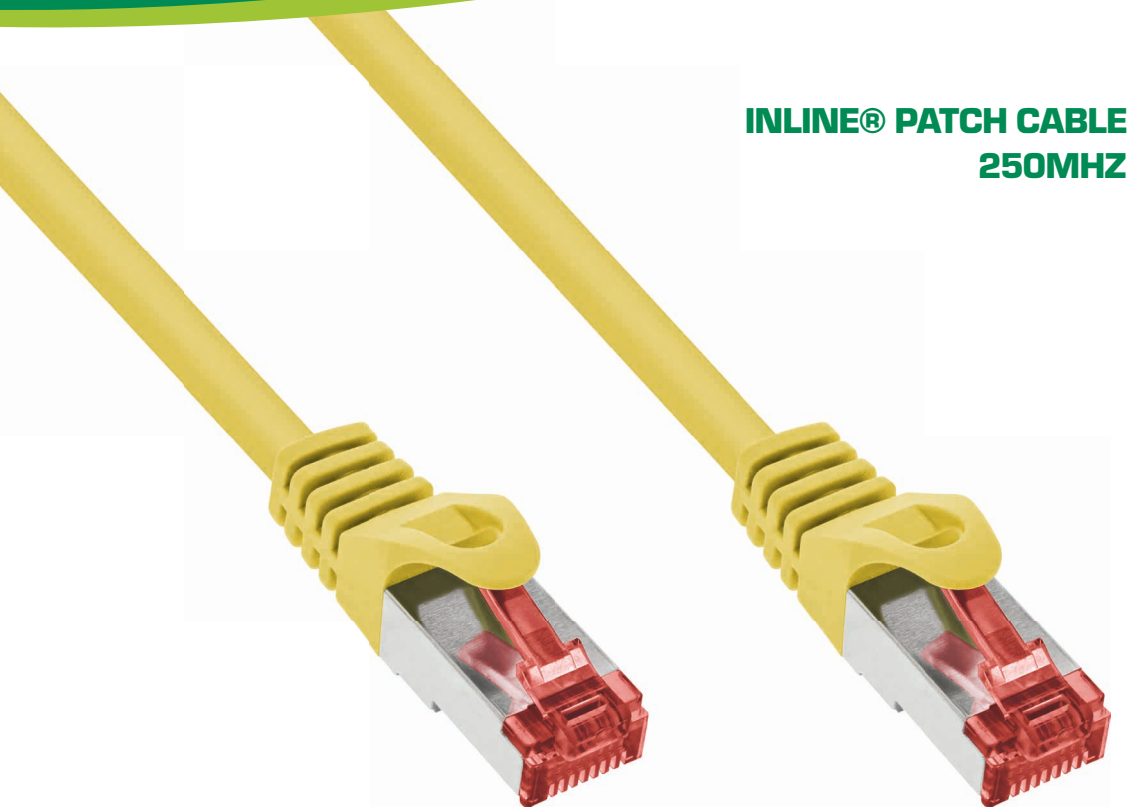

- 2x RJ45 (8P8C) moulded
- Moulded boot and latch protection
- Red coloured RJ45 plug for the quick differentiation
- S/FTP cable, Cat. 6, AWG27, PVC sheet
- CCA Conductors
- Overall braid shielding and PiMf - pairs in metal foil (formerly named: S-STP PiMf)
- With length indication on the plug
- 1:1 pin assignment according to EIA/TIA 568B
- Gigabit compatible
- In a reclosable PE bag with EAN code, ideal for the shop wall

Technical Data	
Brand	InLine®
Category	Cable
Side A	RJ45 plug straight
Side B	RJ45 plug straight
Shielding	S/FTP (PiMf)
Type	Cat.6
Signal	Network
Cross-section	AWG 27
Outer diameter	5.9 mm
UL	No
Data transfer rate	1 Gb/s
PoE/PoE+/PoE++	No
Design	Round cable
Operation temperature	-10 to +60 °C
Storage temperature	-20 to +70 °C
Conductor material	CCA (copper/aluminium)
Sheath	TPE
Assignment	1:1
Patch cable category	Cat.6

Art. Nr.	Length	EAN
76122Y	0.25 m	4043718231669
76133Y	0.3 m	4043718231676
76150Y	0.5 m	4043718231683
76111Y	1 m	4043718231645
76112Y	1.5 m	4043718231652
76102Y	2 m	4043718231591
76103Y	3 m	4043718231607
76105Y	5 m	4043718231614
76107Y	7.5 m	4043718231621
76110Y	10 m	4043718231638

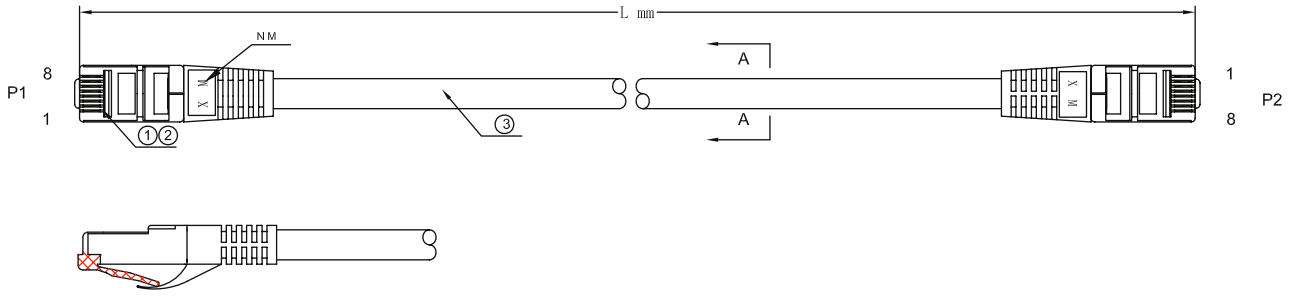


③	CABLE	S/FTP CAT 6（7/0.135 CCA*1P+AL）*4P+Br：AL-MG16*5/0.12mm +PVC JACKET,OD:5.9 ±0.15mm	L	M
②	MOLD HOOD	PVC	2	PCS
①	CONNECTOR	FTP6 class transparent red copper shell looked 8P8C Crystal Head on four	2	PCS
No.	PART NAME	DESCRIPTION	QTY	REMARK

NOTE:

Electrical test:

100% open short & miss wire test;

ALL MATERIAL BE ROHS COMPLIANT.

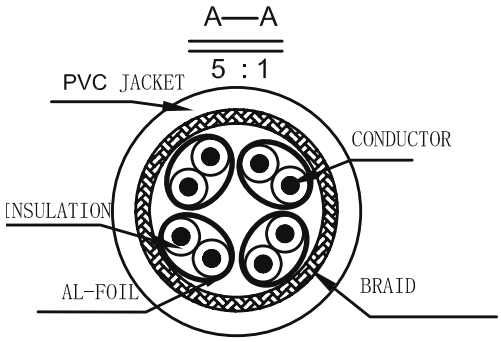



PIN OUT（568B-568B）

