


DATASHEET

RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 3m

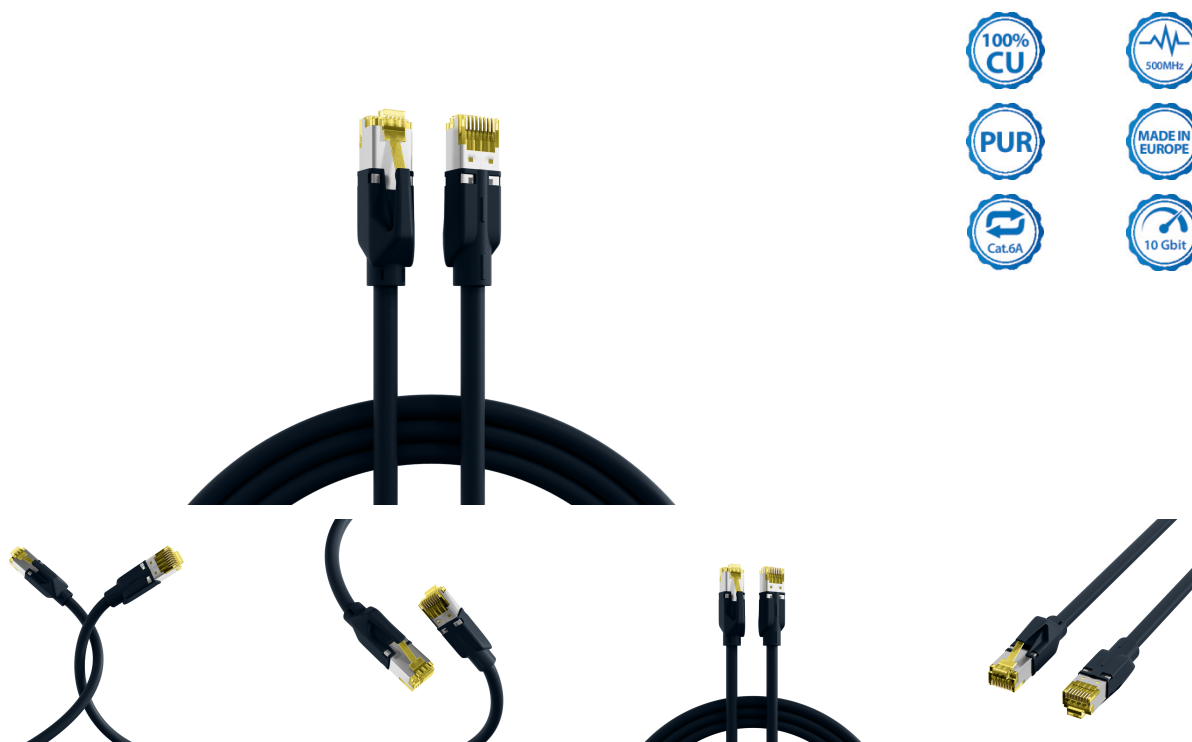

General data

This Cat.6A (TIA) data cable from EFB-Elektronik transmits data up to 10Gbit. The S/FTP shielding reliably protects against interference and ensures good signal quality. Since it is a Cat.6A (TIA) Ethernet cable, it offers a frequency range of up to 500MHz, which provides high data transmission performance.

- Designed for sun-exposed installations – UV-resistant jacket materials reduce material ageing caused by sun exposure and increase service life when used in bright/sunny areas (e.g. near windows or in sheltered outdoor areas).
- Increase interference immunity in electromagnetically charged environments – double shielding (S/FTP) improves EMC reserve, reduces susceptibility to radiation and stabilizes transmission in parallel cable routing.
- Power and connect end devices via one cable – reduces cabling effort because data and power are transmitted via 4PPoE according to IEEE802.3bt on one line (fewer power supplies/sockets, faster installation).

Product Description

The S/FTP LAN cable has a double shield that effectively reduces electromagnetic interference. It can be used in a temperature range of -20 – 60 °C. The wide range of possible applications is supported by the bending radius of >25 mm. The data cable is IP20 rated. The polyurethane (PUR) jacket is particularly robust, making it suitable for demanding industrial applications.

Technical details

This datasheet was created automatically on 26-09-2026 . Technical changes reserved.

DATASHEET

RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 3m

- Cat.6A (TIA)
- Connector: RJ45 8(8) to RJ45 8(8) with yellow TM31 connectors
- Shielding: S/FTP cable with 4x2 x AWG26/7
- Cable shape: round
- Pin assignment: 1:1 according to TIA/EIA 568B
- Equivalent to PoE class: PoE to IEEE802.3af, PoE+ to IEEE802.3at, and 4PPoE to IEEE802.3bt
- Gold-plated contacts
- Sheath: Polyurethane (PUR) sheath material
- Outer diameter: 6.4 mm
- With an attached anti-kink grommet
- Degree of protection: IP20
- With a 360° umbrella attachment
- With locking lever protection
- Mating cycles: ≥ 750
- Brand: EFB-Elektronik

Technical properties

AWG-size	26/7
Allocation	acc. TIA/EIA 568B
Anti-kink sleeve	put-on
Area of Application	Industrial Ethernet
Bandwidth	500MHz
Bending radius	>25 mm
Cable construction	4x2
Cable shape	rund
Cable type	S/FTP
Cable type acc. to Manufacturer	Draka Patch Pro flex Cat 7
Cabling standard	EN50173
Category	6A (TIA)
Colour anti-kink sleeve	black
Colour outer sheath	black
Conductive shield	360° shield contact
Conductor Material	Copper
Conductor resistance DC	125 Ω /km
Connector	IEC 60603-7-51
Connector type	TM31 yellow
Contact Resistance	< 20 m Ω
Contacts	Gold plated
Current capacity	max. 1 A

This datasheet was created automatically on 26-09-2026 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 3m

Fire retardant version	no
Halogen free	False
Harmonised Standard	EN 50575
Impedance	100 $\pm$ 5 Ω
Insulation Resistance	$\geq$ 500 M Ω
Length imprint	False
Locking lever	True
Loop resistance	250 Ω /km
Material outer sheath	Polyurethan (PUR)
Mating cycles	$\geq$ 750
Model	shielded
NVP value	75
Oil resistant	no
Operating Temperature	-20 - 60 $^{\circ}$ C
Operating-/ tempering voltage	max. 50 V DC
Outer diameter of the cable	6.4 mm
Ozone resistance	No
Pin assignment	1:1
Printing	Cat.6A PREMIUM Patchcord U/UTP 4x2xAWG24/7 ISO/IEC11801 TIA/EIA-568-C.2 ***10Gigabit Ethernet***
Raw cable	Cat.7
Resistance unbalance	2 %
Resistant to chemicals	False
Suitable for degree of protection (IP)	IP20
Test voltage	1000 (V DC, 1min) core/core und core/screen
Transmission	10Gbit
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
UL approbated	False
UV resistant	True

Available variants

ArtNr.	Bezeichnung	Length POE class	Length tolerance
K3130.0,5	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 0,5m	0.5 m PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	$\pm$ 5 %

This datasheet was created automatically on 26-09-2026 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 3m

K3130.1	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 1m	1.0 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K3130.1,5	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 1,5m	1.5 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K3130.10	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 10m	10.0 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K3130.15	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 15m	15.0 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K3130.2	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 2m	2.0 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K3130.20	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 20m	20.0 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K3130.25	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 25m	25.0 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K3130.3	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 3m	3.0 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K3130.30	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 30m	30.0 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at	±5 %
K3130.5	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 5m	5.0 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
K3130.50	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 50m	50.0 m	No	±5 %
K3130.7,5	RJ45 Patch Cord Cat.6A S/FTP PUR Cat.7 raw cable TM31 black 7,5m	7.5 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at	±5 %

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 26-09-2026 . Technical changes reserved.

