



Datenblatt - Fiche technique - Data sheet

**11.01.6260**




ROLINE RS232-Kabel 9pol ST-BU, 6,0m

ROLINE Câble RS-232 9 pôles M/F, 6,0m

ROLINE RS232 Cable, DB9 M - F, 6 m

1800+50/-0MM

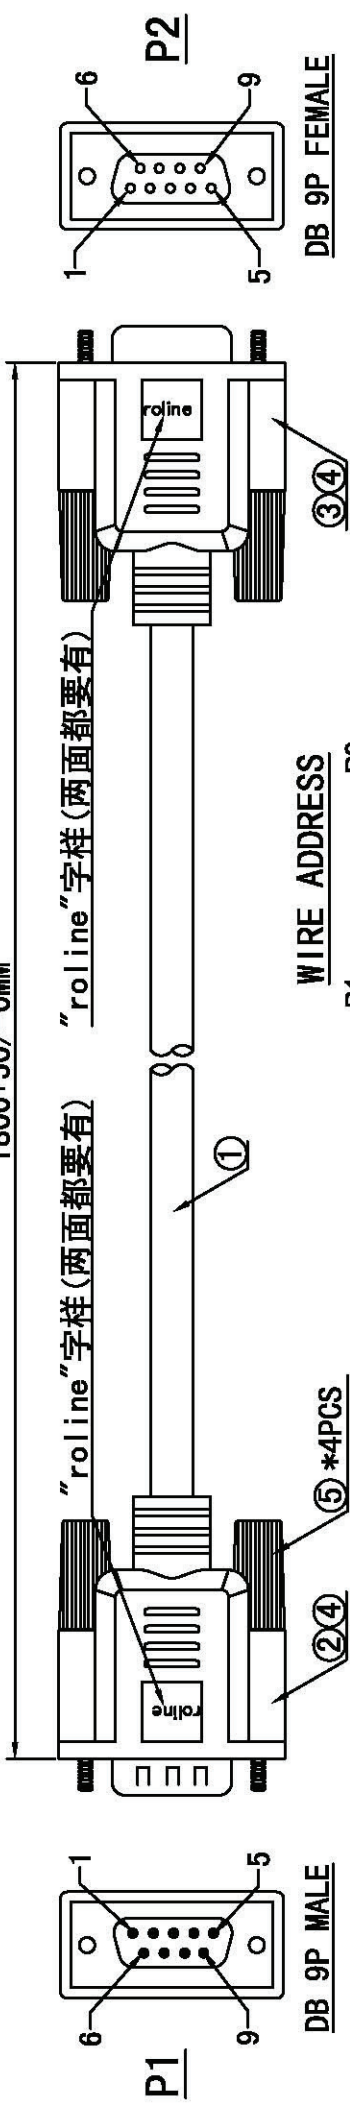


WIRE ADDRESS


P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHELL	SHELL

- NOTE:
1. CABLE: NON-JUL 30AWG\*9C+AE OD=5.0MM JACKET: PVC BEIGE;
  2. CONN: DB 9P MALE INSULATION: BLACK, SHELL NICKEL-PLATED;
  3. CONN: DB 9P FEMALE INSULATION: BLACK, SHELL NICKEL-PLATED;
  4. OUTER MOLD: PVC 45P BEIGE;
  5. SCREW: #4-40UNC 2.3\*44MM BEIGE.


- Electronic Test:
1. 100% TEST OPEN SHORT MIS-WIRE;
  2. INSULATION RESISTANCE: 5M OHM MIN;

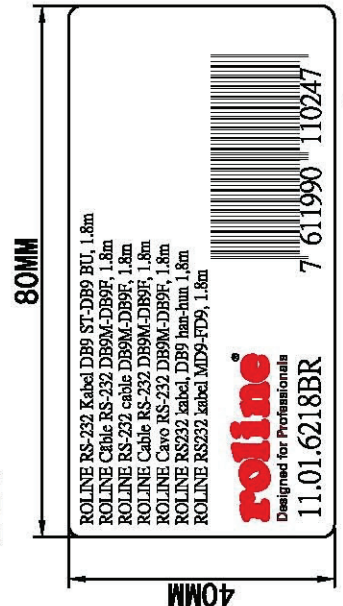


STICKER

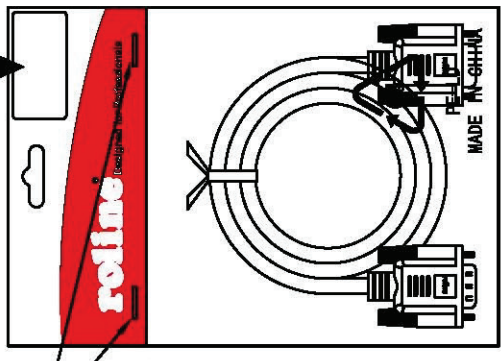

订书针

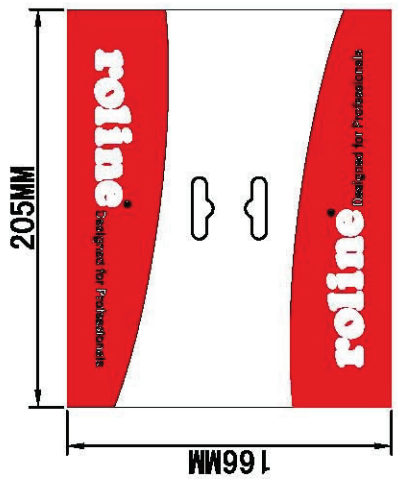

1PCS/PE BAG(200\*300\*0.06MM) + HEAD  
+STICKER + 50PCS/CTN

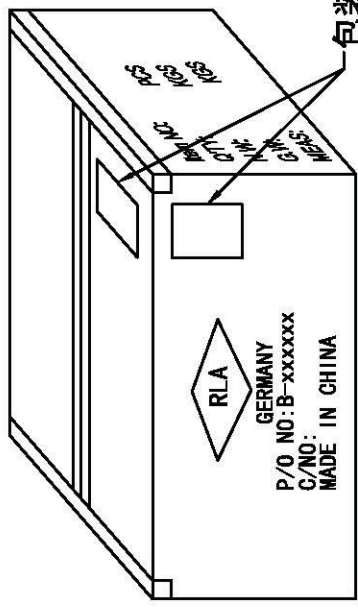

外箱尺寸:  
0.6' (42\*28\*16CM)  
50PCS/箱

Company	Goods Code	Draw	FC038	Jack	Date	2012-07-14
ITEM NO	11.01.6218	Check			Date	
Goods NO		Approval			Date	
origina1NO.	Unit (MM)					
			VER. A	REVISE		Date
Rotronic. Co., Ltd						
			B			
			C			
			D			