



Datenblatt - Fiche technique - Data sheet


**11.02.8306**





ROLINE USB 2.0 Ladekabel, 1x A- 3x Micro B, ST/ST, 0,8m

ROLINE Câble chargeur USB 2.0, 1x A - 3x Micro B, M/M, 0,8m

ROLINE USB 2.0 Charging Cable, 1x A - 3x Micro B, M/M, 0.8m

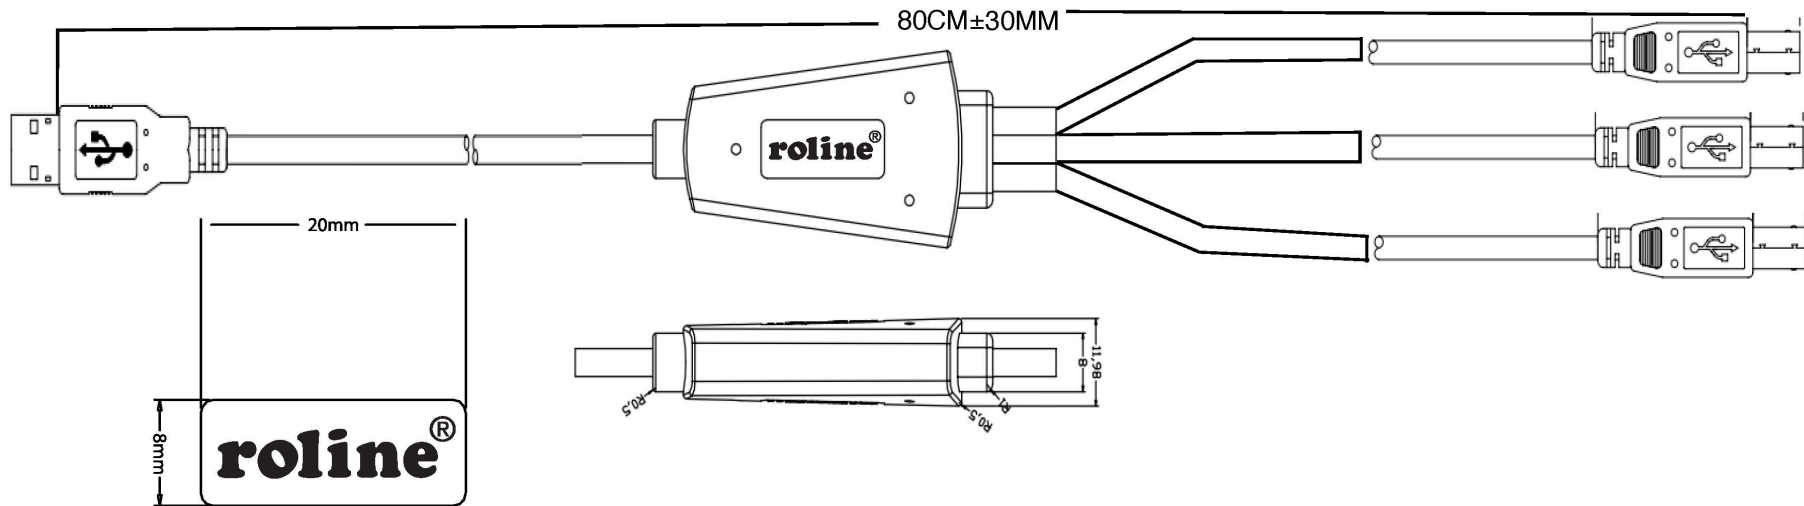

### Pin Assignment

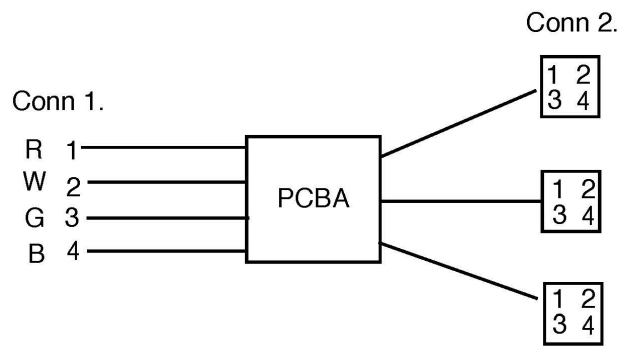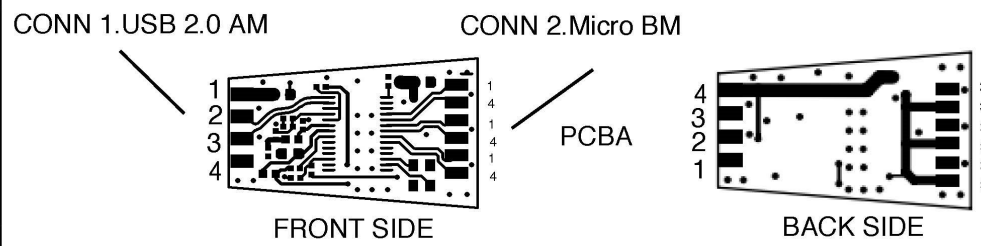

|     | USB CABLE 28AWG*2C+24AWG*2C OD:3.2mm PVC 45P PMS:BLACK |      |      |
|-----|--|------|------|
| ④   | USB 2.0 USB AM and MICRO USB BM NICKEL PLATE CONNECTOR |      |      |
| ③   | PVC 45P PMS:BLACK                                      |      |      |
| ②   | PE(LDPE)   | 1    | pcs  |
| ①   | SMD+DIP  | 0.8  | M    |
| NO. | DESCRIPTION  | Q'TY | UNIT |

| REV. | DATE | CONTENTS OF CHANGE | DESIGNER |         |     |     |     |     |   | APPROVAL | CHECK | DRAWING | ITEM NO. | 11.02.8306  |  |
|------|------|--------------------|----------|---------|-----|-----|-----|-----|---|----------|-------|---------|----------|---|--|
| ⚠    |      |                    |          |         |     |     |     |     |   |          |       |         | DESC.    | ROLINE USB 2.0 Multi-Charging Cable<br>A M to 3x Micro B M, 0.8m, black |  |
| ⚠    |      |                    |          | 6~30    |     | .15 | .25 |     |   | .25      |       |         |          | <b>rotronic</b>   |  |
| ⚠    |      |                    |          | 30~80   | 0.1 | .15 | 0.2 | 0.3 | 2 | 1.5      | 1     | 0.3     |          |   |  |
| ⚠    |      |                    |          | 80~180  | .15 | .15 | .25 | 0.3 | 2 | 2        | 1     | .45     |          |   |  |
| ⚠    |      |                    |          | 315~800 | 0.2 | 0.3 | 0.4 | 0.5 | 3 | 3        | 2     | 1.1     |          |   |  |
|      |      |                    |          |         |     |     |     |     |   | Ⓢ        | SCALE | UNIT    |          |   |  |