



Datenblatt - Fiche technique - Data sheet

11.02.9011



ROLINE USB 3.1 Kabel, A-C, ST/ST, 1 m

ROLINE Câble USB 3.1, A-C, M/M, 1 m

ROLINE USB 3.1 Cable, A-C, M/M, 1 m

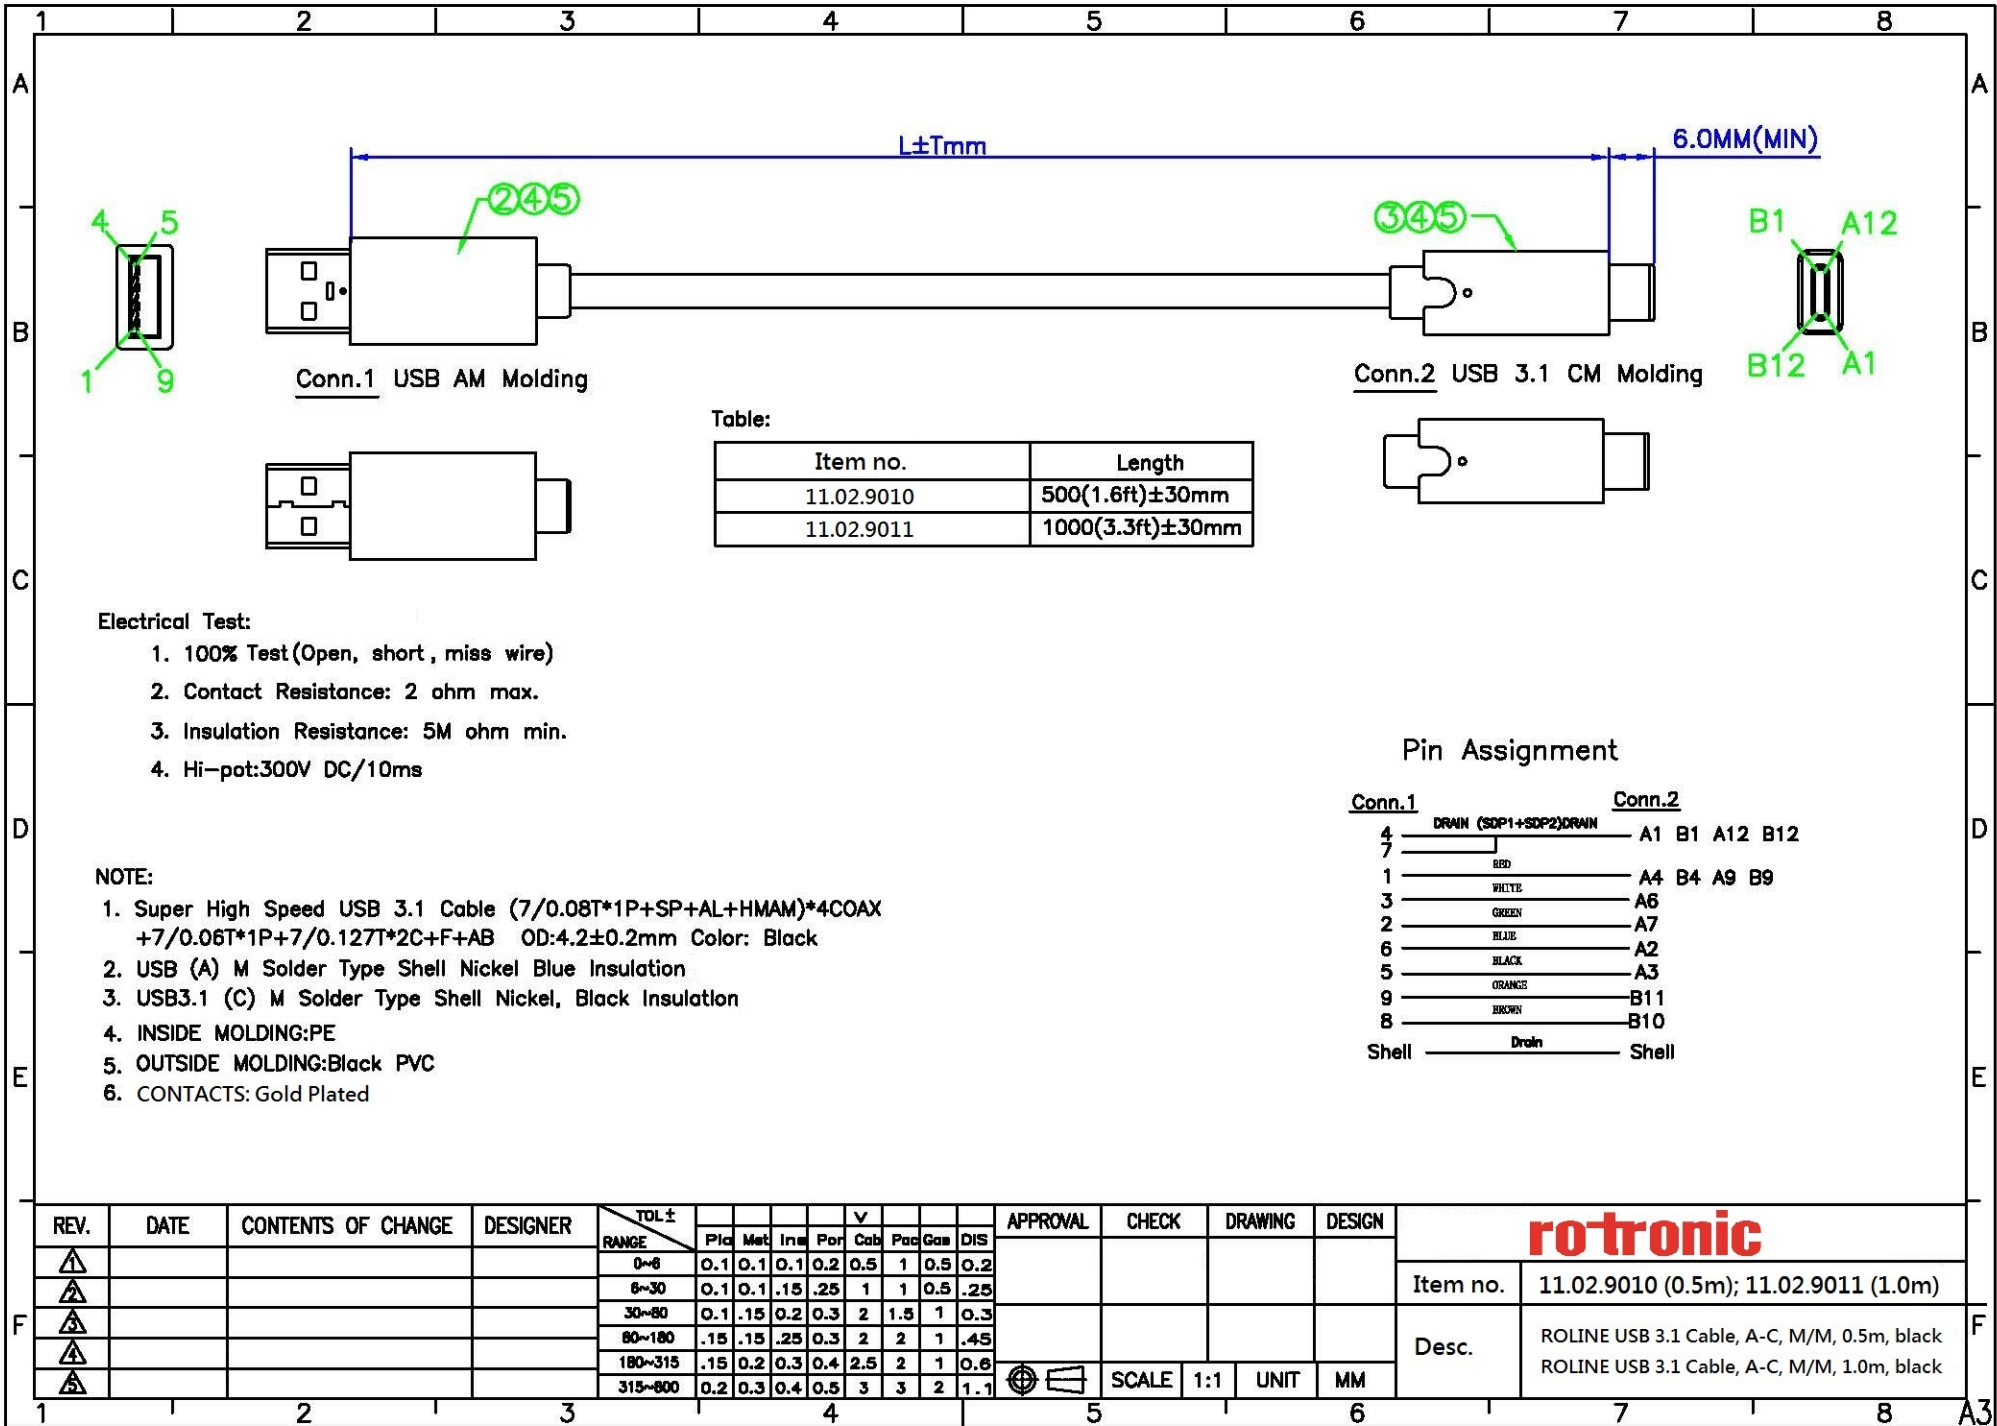


Table:

Item no.	Length
11.02.9010	500(1.6ft)±30mm
11.02.9011	1000(3.3ft)±30mm

Electrical Test:

1. 100% Test (Open, short, miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot: 300V DC/10ms

NOTE:

1. Super High Speed USB 3.1 Cable (7/0.08T*1P+SP+AL+HMAM)*4COAX +7/0.06T*1P+7/0.127T*2C+F+AB OD:4.2±0.2mm Color: Black
2. USB (A) M Solder Type Shell Nickel Blue Insulation
3. USB3.1 (C) M Solder Type Shell Nickel, Black Insulation
4. INSIDE MOLDING: PE
5. OUTSIDE MOLDING: Black PVC
6. CONTACTS: Gold Plated

Pin Assignment

Conn.1	Conn.2
4	DRAIN (SDP1+SDP2) DRAIN
7	
1	RED
3	WHITE
2	GREEN
6	BLUE
5	BLACK
9	ORANGE
8	BROWN
Shell	Drain

REV.	DATE	CONTENTS OF CHANGE	DESIGNER	TOL ±	APPROVAL	CHECK	DRAWING	DESIGN	rotronic	
△				RANGE					Item no.	11.02.9010 (0.5m); 11.02.9011 (1.0m)
△				0~6					Desc.	ROLINE USB 3.1 Cable, A-C, M/M, 0.5m, black ROLINE USB 3.1 Cable, A-C, M/M, 1.0m, black
△				6~30						
△				30~80						
△				80~180						
△				180~315						
△				315~800					SCALE	1:1
									UNIT	MM