



Datenblatt - Fiche technique - Data sheet

11.03.1560




ROLINE Internes Festplattenkabel SATA 3.0 Gbit/s, 1,0m

ROLINE Câble SATA 3.0 Gbit/s pour disques durs, 1m


ROLINE Internal SATA 3.0 Gbit/s Cable, 1 m

ROHS-COMPPLIANT

LTR	REV.	DESCRIPTION	DATE
△*2	B	ECR # 081203-5 EDIT PACKING, ADD BARCODE LABEL	12/03/08'

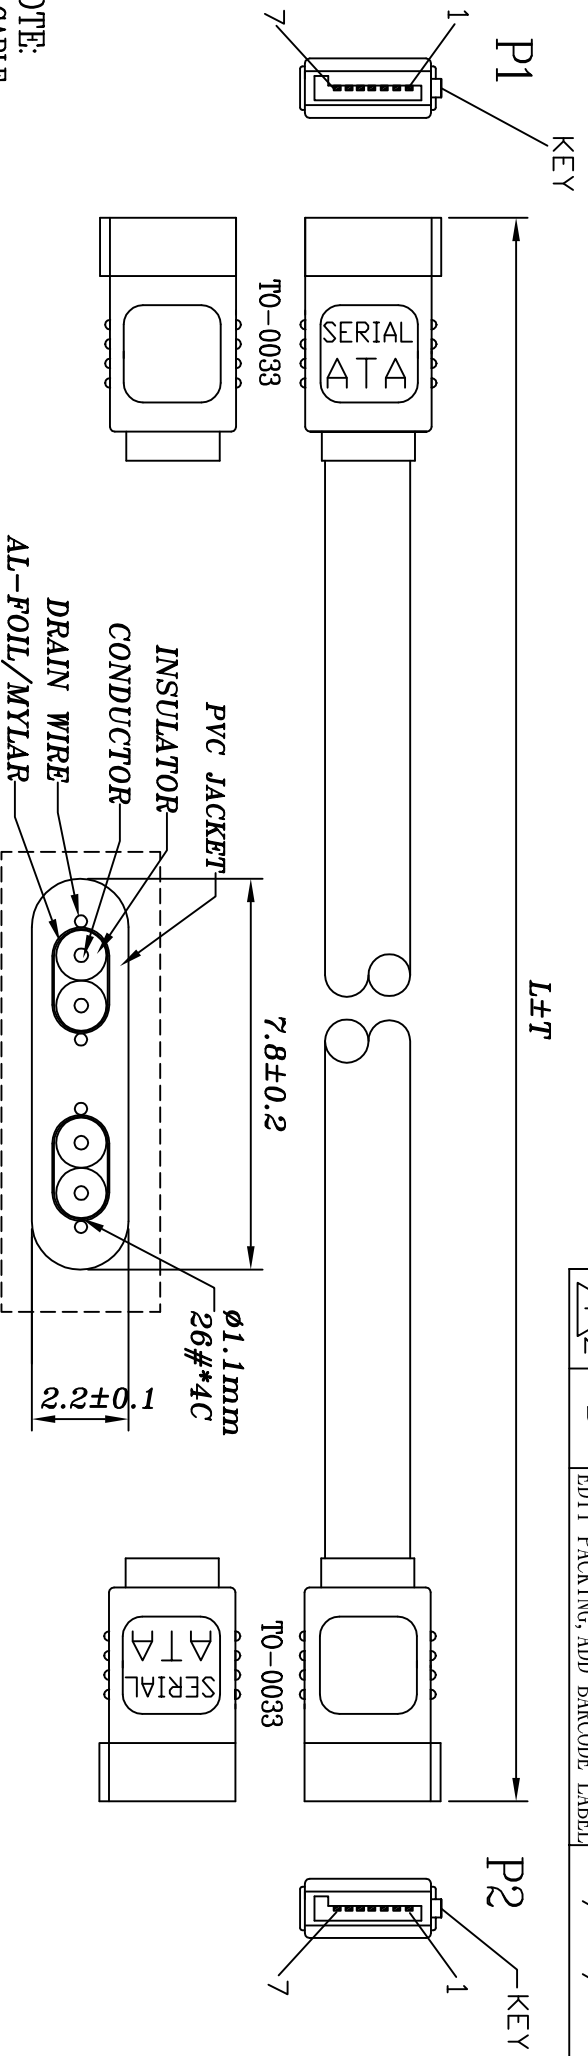

- NOTE:**
- CABLE:**
UL2725 80°C 30V [26AWG(1/0.404)*2F +AL/MY+DRAIN WIRE(1/0.32)*2]TIN
INS: FOAM-PE OD: ø1.1±0.05mm
PVC JACKET OD: ø(2.2±0.1)*(7.8±0.2)mm COLOR: RED (PANTONE 200C)
IMPEDANCE: 100±5 OHM
 - CONNECTOR:**
2-1 MATERIAL:
HOUSING: HIGH TEMPERATURE POLYESTER & GLASS FIBER UL 94V-0
TERMINAL: COPPER ALLOY, CRIMP TYPE
 - 2-1 PLATING:**
CONTACT AREA: G/F
 - HOOD:** MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)
 - CABLE ASS'Y ELECTRICAL TEST:**
4-1 100% OPEN SHORT & MIS WIRE TEST
4-2 CONTACT RESISTANCE 3 OHM MAX
4-3 INSULATION RESISTANCE 10M OHM MIN
4-4 HI-POT DC300V/0.01SEC.
 - PACKING:** EACH PC / POLYBAG + HEADER CARD + BAR CODE LABEL.
100 PCS / INNER CARTON, 2 INNER CARTON / MASTER CARTON

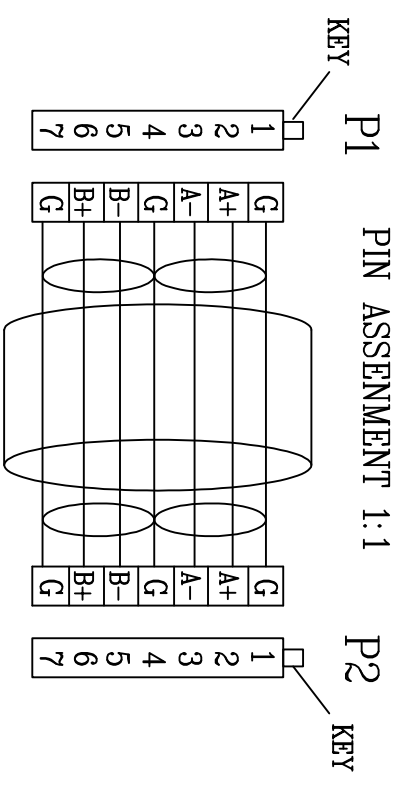

- 2-1 PLATING:**
CONTACT AREA: G/F
- HOOD:** MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)
- CABLE ASS'Y ELECTRICAL TEST:**
4-1 100% OPEN SHORT & MIS WIRE TEST
4-2 CONTACT RESISTANCE 3 OHM MAX
4-3 INSULATION RESISTANCE 10M OHM MIN
4-4 HI-POT DC300V/0.01SEC.
- PACKING:** EACH PC / POLYBAG + HEADER CARD + BAR CODE LABEL.
100 PCS / INNER CARTON, 2 INNER CARTON / MASTER CARTON

140-1483-2	11.03.1560	1000	20	360*310*150	380*330*340	7611990148790
140-1483-1	11.03.1555	500	20	360*310*100	380*330*240	
DWG	P/N	L (mm)	T (mm)	INNER CTN(mm)	MASTER CTN(mm)	BAR CODE NO.

Tolerance Inch M/M		Rotronic Co., Ltd. SERIAL ATA SIGNAL CABLE Customer P/N
.X	.015 .30	
.XX	.010 .10	
.XXX	.005 .05	
Drawn	FANNIE 12/03/08'	App'd
Check		Scale NONE Units m/m Third Angle Projection
Engr		Dwg No. 140-1483 REV: B Sheet 1/1