



Datenblatt - Fiche technique - Data sheet

11.04.5609



ROLINE DisplayPort Kabel, DP ST - ST, 10,0m


ROLINE Câble DisplayPort DP M - DP M, 10,0m

ROLINE DisplayPort Cable, DP-DP, M/M, 10 m

ROHS-COMPLIANT

DISPLAYPORT MALE
INS:BLACK

DISPLAYPORT MALE
INS:BLACK

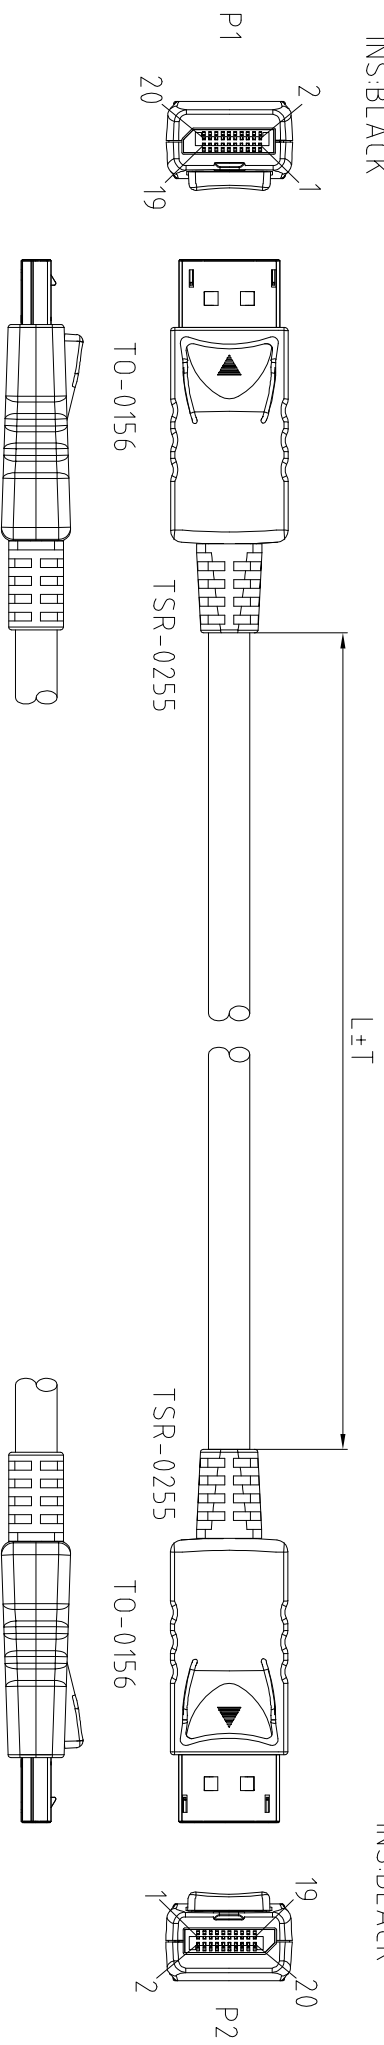

NOTE:

- 1.CABLE: UL-20276 [#30(7/0.1 T.C)×1P INS:FOAM-PE+D.W(7/0.1 T.C)+AL/MY +Hot-melt Mylar]×5C + #30(7/0.1 T.C)×4C INS:Polyethylene+AL/MY + B.D(85%) PVC JACKET; OD:6.5±0.2mm COLOR:MATT BLACK(NK-K01) .
- 2.CONNECTOR:
P1 & P2: DISPLAYPORT 20P MALE W/PCB & LATCH CONTACT:15u"
SHELL:NI-PLATED.
- 3.SHIELD:INNER MOLD MUST BE WRAPPED COPPER T0 CONNECTOR SHELL & CABLE BRAID
- 4.HOOD:ASS'Y TYPE, PLASTIC HOOD COLOR:BLACK(NK-K01)
- 5.ELECTRICAL TEST:
(1)100% OPEN SHORT & MIS WIRE TEST.
(2)CONTACT RESISTANCE 3 ohm Max .
(3)INSULATION RESISTANCE 10M ohm Min .
(4)HI-POT DC300V
- 6.PACKING:EACH PC / POLY BAG + HEADER CARD + BAR CODE LABEL.

| | | | | | |
|------------|------------|-------|-------|---------|---------------|
| 200-1161-3 | 11.04.5605 | 5000 | 50 | 10 | 7611990186280 |
| 200-1161-2 | 11.04.5603 | 3000 | 30 | 20 | 7611990186273 |
| 200-1161-1 | 11.04.5602 | 2000 | 30 | 20 | 7611990186266 |
| DWG | P/N | L(mm) | T(mm) | PCS/CTN | BAR CODE NO. |

| | | |
|-------------------------|-----------------|------------------------|
| Tolerance Inch M/M | | |
| X | .015 .30 | |
| XX | .010 .10 | |
| XXX | .005 .05 | |
| Draw | | |
| FANNIE 01/14/09' | | |
| Title | | |
| DISPLAYPORT ASS'Y CABLE | | |
| Customer P/N | | |
| App'd | Customer: T-RAG | |
| Scale NONE | Units M/M | Third Angle Projection |
| Dwg No. 200-1161 | REV:A | Sheet: 1/2 |

Rotronic co., LTD.

| LTR | REV. | DESCRIPTION | DATE |
|-----|------|-------------|------|
| | | | |

PIN OUT

| P1 | P2 | CABLE FUNCTION |
|-------|-------|-----------------|
| 1 | 12 | ML_Lane 0(p) |
| 3 | 10 | ML_Lane 0(n) |
| 2 | 11 | GND |
| 4 | 9 | ML_Lane 1(p) |
| 6 | 7 | ML_Lane 1(n) |
| 5 | 8 | GND |
| 7 | 6 | ML_Lane 2(p) |
| 9 | 4 | ML_Lane 2(n) |
| 8 | 5 | GND |
| 10 | 3 | ML_Lane 3(p) |
| 12 | 1 | ML_Lane 3(n) |
| 11 | 2 | GND |
| 15 | 15 | AUX CH(p) |
| 17 | 17 | AUX CH(n) |
| 16 | 16 | GND |
| 13 | 13 | GND |
| 14 | 14 | GND |
| 18 | 18 | Hot Plug Detect |
| 19 | 19 | Return DP_PWR |
| SHELL | SHELL | |

| | | |
|-----------|------|-----|
| Tolerance | Inch | M/M |
| .X | .015 | .30 |
| .XX | .010 | .10 |
| .XXX | .005 | .05 |

Draw FANNIE 01/14/09'

Rotronic co., LTD.
 Title
 DISPLAYPORT ASS'Y CABLE
 Customer P/N

| | |
|---------|---------------------------------------|
| App'd | Customer: T-RAG |
| Scale | NONE Units M/M Third Angle Projection |
| Dwg No. | 200-1161 REV.A Sheet 2/2 |