



Datenblatt - Fiche technique - Data sheet

11.04.5610




ROLINE DisplayPort Kabel DP ST - DVI ST, 2,0m

ROLINE Câble DisplayPort DP M - DVI M, 2,0m

ROLINE DisplayPort Cable, DP-DVI (24+1), M/M, 2 m


10.56MM(REF)

2000±20MM

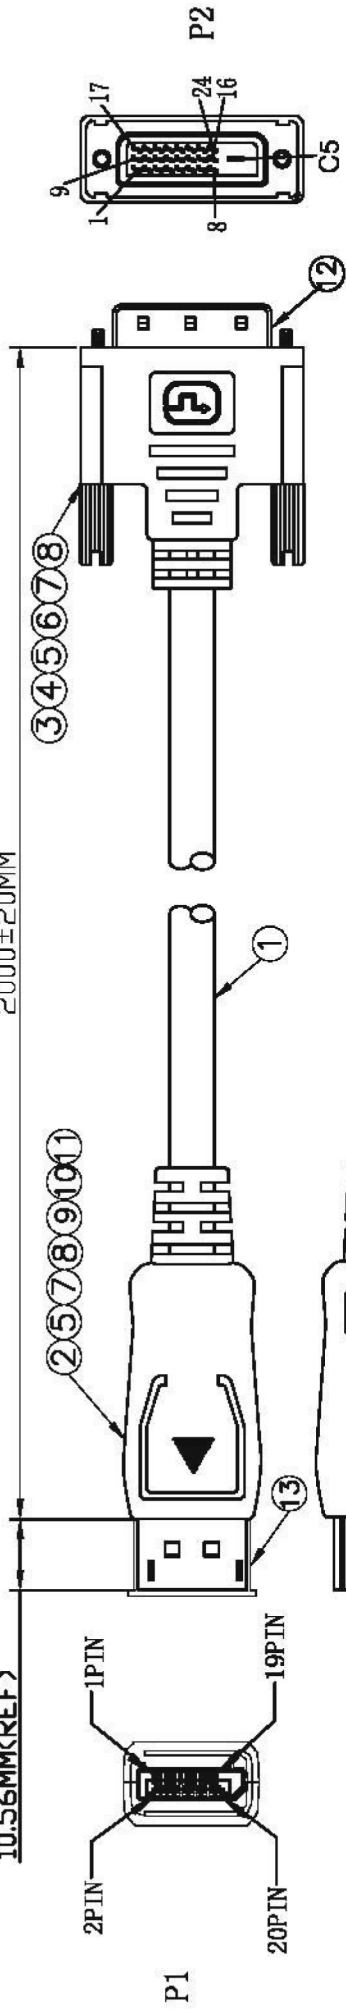


ELECTRICAL TEST:

1. 100% OPEN SHORT SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 1 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

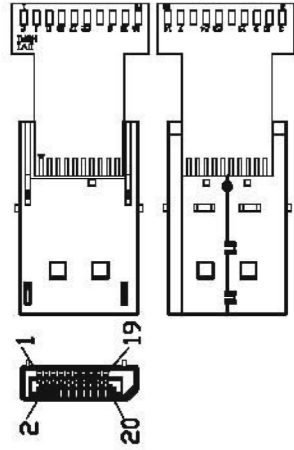

PIN Assignment

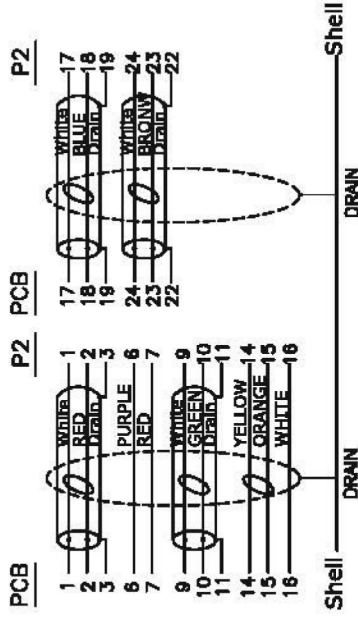

| NO | CELINK P/N | DESCRIPTION | Q'TY | UNIT |
|----|-------------|--|------|------|
| 13 | A6-0000099 | DisplayPort TRANSPARENT DUST COVER | 1 | PCS |
| 12 | A6-0000025 | DVI M TRANSPARENT DUST COVER | 1 | PCS |
| 11 | A6-R071085 | DISPLAY PORT M ABS BOTTOM SHELL | 1 | PCS |
| 10 | A6-R071084 | DISPLAY PORT M ABS TOP SHELL | 1 | PCS |
| 9 | A10-R043162 | H.S.T:Ø1.5*42mm. | 1 | PCS |
| 8 | A10-R075147 | H.S.T:Ø1.0*10mm. | 8 | PCS |
| 7 | A10-R075130 | H.S.T:Ø2.5*10mm. | 8 | PCS |
| 6 | A7-R040001 | SCREW:#4-40UNC(2.8*45MM) NICKEL | 2 | PCS |
| 5 | A5-R047001 | PVC 45P COLOR:BLACK | 38 | G |
| 4 | A5-R047011 | TRANSPARENT PE | 5 | G |
| 3 | A2-R020051 | DVT(24+1) M SOLDER TYPE,NICKEL PLATED,BLACK INSULATION | 1 | PCS |
| 2 | A78-0000080 | DISPLAY PORT M+PCB+SMT | 1 | set |
| 1 | A4-R001376 | UL20276(30AWG*1PR+EAM)*4C+30AWG*1PR+30AWG*3C+AEB(AL) OD:5.5MM BLACK JACKET | 2 | M |
| NO | CELINK P/N | DESCRIPTION | Q'TY | UNIT |

| REV. | DESCRIPTION | DATE |
|------|----------------------|------------|
| .X | TOLERANCE INCHES M/M | |
| .XX | .015 .30 | |
| .XXX | .010 .10 | |
| | .005 .05 | |
| | JOE | |
| | DRAWN BY | |
| | CHECK BY | |
| | APPD BY | |
| | CUSTOMER P/N : | 11.04.5610 |
| | SCALE | NONE |
| | UNIT | MM |
| | DATE | 2013.02.21 |
| | DRAWING NO.: | CA1790007 |
| | REV. | A |
| | | 1/6 |

Rotronic Co., Ltd.

ROLINE Display to DVI Cable, DP M - DVI 2M, black