



Datenblatt - Fiche technique - Data sheet


11.99.8751



VALUE USB 2.0 Kabel, USB A ST - Micro USB B ST, 0,15m



VALUE Câble USB 2.0, USB A mâle - Micro USB B mâle, 0,15m

VALUE USB 2.0 Cable, A - Micro B, M/M, 0.15 m



P1

USB A Male

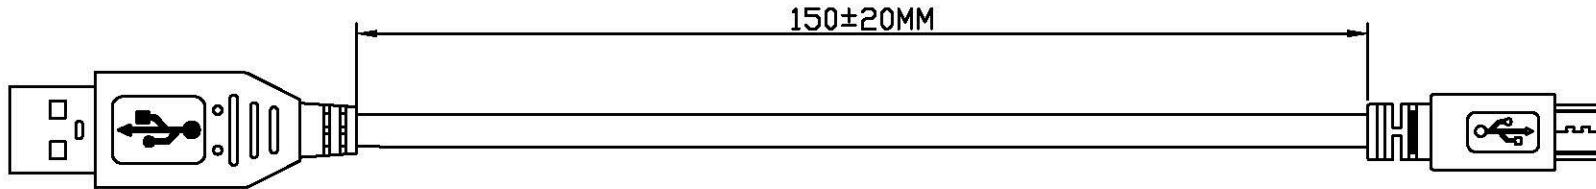

P2

USB Micro B Male

NOTES:

1. MATERIALS

1.1 CABLE: (7/0.12BC*1P)+7/0.12BC*2C+AM+7/0.12BC+64/0.12ALM+WHITE (KKE75-4010-75) PVC JACKET].
OD=∅4.0 ± 0.15MM.

CABLE PRINTING:USB 2.0 CABLE FULLY RATED 30V 80°C

1.2 P1: USB 2.0 A TYPE MALE: SOLDER TYPE, GOLD FLASH CONTACTS, NICKEL PLATED SHELL

1.3 P2: USB 2.0 MICRO B TYPE MALE: SOLDER TYPE, GOLD FLASH CONTACTS, NICKEL PLATED SHELL


1.4 ALL HOOD: MOLDED WHITE (KKCS50-4010-85) PVC.

2. TESTING: 100% OPEN AND SHORT TEST.

3. RoHS & REACH COMPLIANT.



PIN OUT

AM MICRO BM



SHELL (BRAID+DRAIN) SHELL



		LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1		SCALE: FREE	rotronic			
		ANGLE TOLERANCE: X° ±3' .X° ±1'		UNIT: mm				ITEM NO.
01		2013-9-2			 	DESC.	VALUE USB 2.0 Cable, A M / Micro B M, 0.15m, white	APPROVED:
00		2013-8-23		VERSION: 00				
REV.	MODIFY DESCRIPTION	DATE						