



Datenblatt - Fiche technique - Data sheet


**11.99.8752**





VALUE USB 2.0 Kabel, USB A ST - Micro USB B ST, 1,8m

VALUE Câble USB 2.0, USB A mâle - Micro USB B mâle, 1,8m


VALUE USB 2.0 Cable, A - Micro B, M/M, 1.8 m

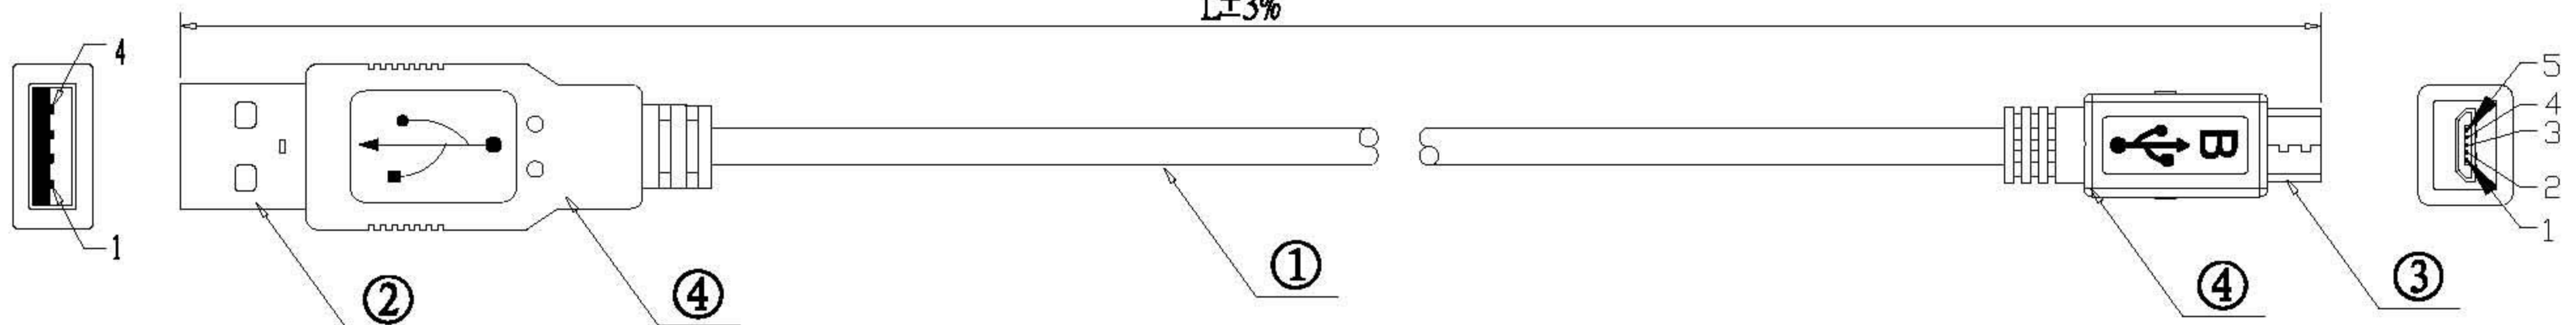

MARKING: AWM E200765 STYLE 2725 60°C 30V 1P/28AWG AND 2C/28AWG USB FT2

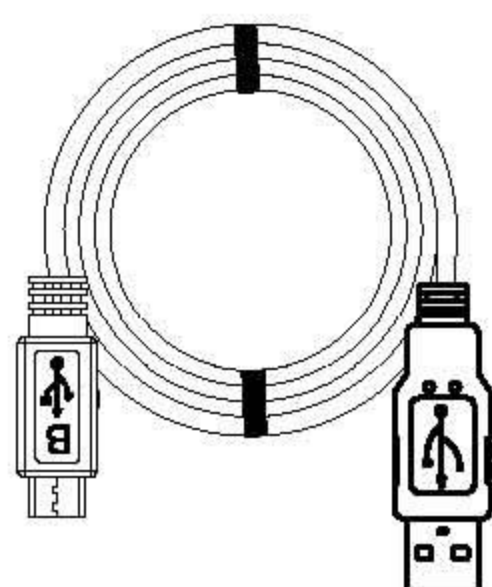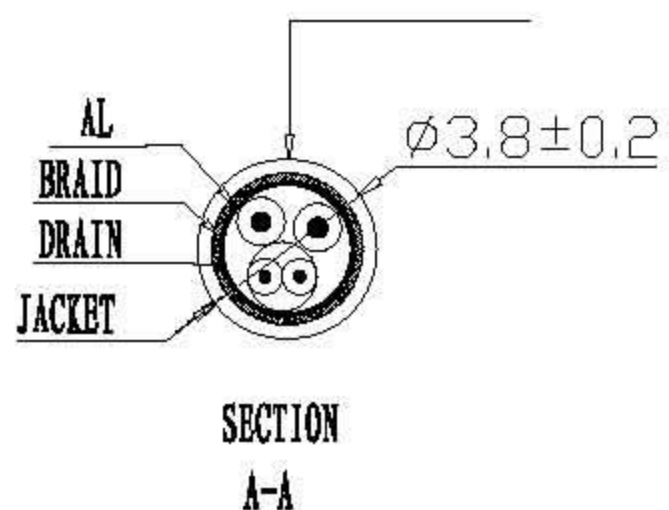

Pin Assignment

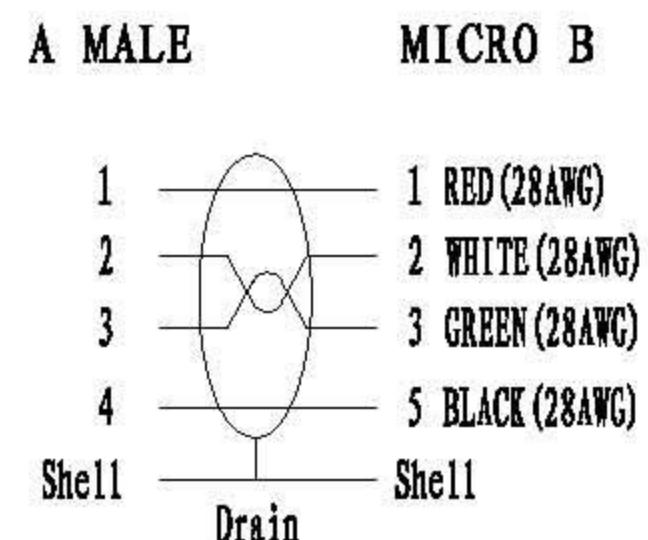

Note:

1. Conductor material: Bare copper
2. Braid material: AL-MG braiding
3. Drain material: Tinned copper wire

ITEM NO	QTY	DESCRIPTION	COLOR
11. 99. 8752	10	VALUE USB2. 0 Cable, TypeAM-Micro BM, 1. 8m	white
11. 99. 8754	10	VALUE USB2. 0 Cable, TypeAM-Micro BM, 0. 8m	white
11. 99. 8755	10	VALUE USB2. 0 Cable, TypeAM-Micro BM, 3. 0m	white

④	MOLDING	OUTER MOLD: 45P PVC COLOR, white	9	G
③	USB-MICRO B	USB MICRO B MALE CONNECTOR FLASH GOLD ; NICKEL PLATED SHELL	1	SET
②	USB-AM	USB AMALE CONNECTOR FLASH GOLD ; NICKEL PLATED SHELL	1	SET
①	CABLE	USB CABLE 28AWG/1P+28AWG/2C+AL+BRAID(48*0.12mm AL-MG braiding) +Drain(7*0.12 Tinned copper wire)PVC JACKET OD: 3.8±0.2mm , COLOR: WHITE 433#	L	M
NO	P/N	DESCRIPTION	QTY	UNIT

REMARK NO	CHANG	SIGNATURE	DATE	SIGN	W.T	SCALE
DRAWN BY	MORGAN					
CHECKED BY						
AUDITED BY		APPROVED BY	QIJUNJIBN			
CRAFT		DATE	2010. 12. 30			
				PAGE OF		

Rotronic Co.,Ltd.

USB AM/BMICRO-XXX

USB.AM.MICRO.XX.3