



Datenblatt - Fiche technique - Data sheet


11.99.8755





VALUE USB 2.0 Kabel, USB A ST - Micro USB B ST, 3,0m

VALUE Câble USB 2.0, USB A mâle - Micro USB B mâle, 3,0m

VALUE USB 2.0 Cable, A - Micro B, M/M, 3.0m

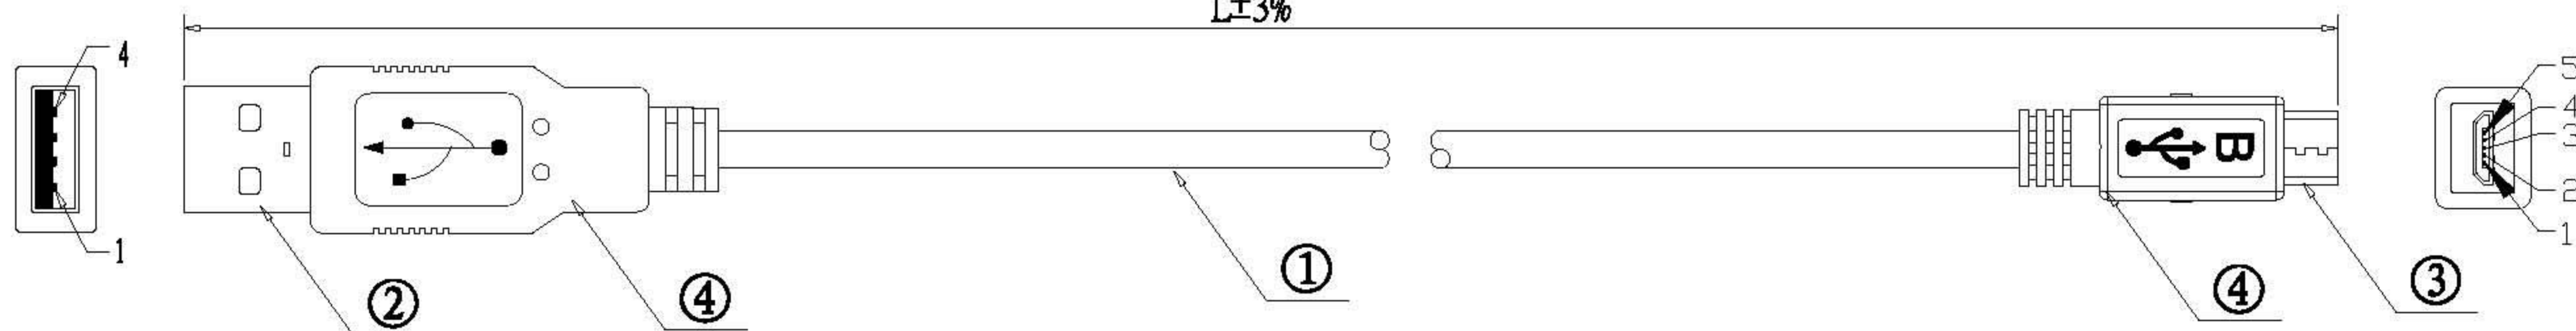

MARKING: AWM E200765 STYLE 2725 60°C 30V 1P/28AWG AND 2C/28AWG USB FT2

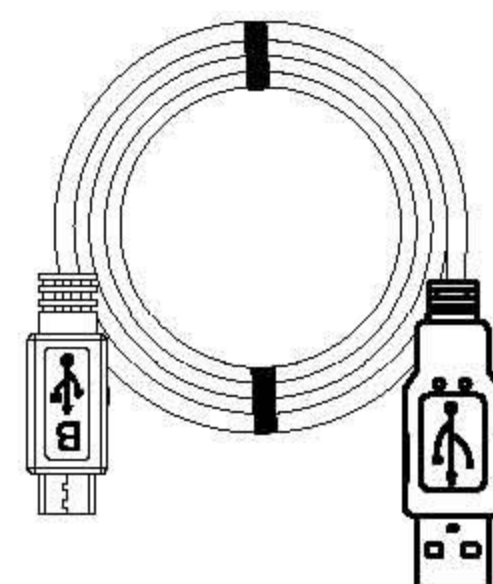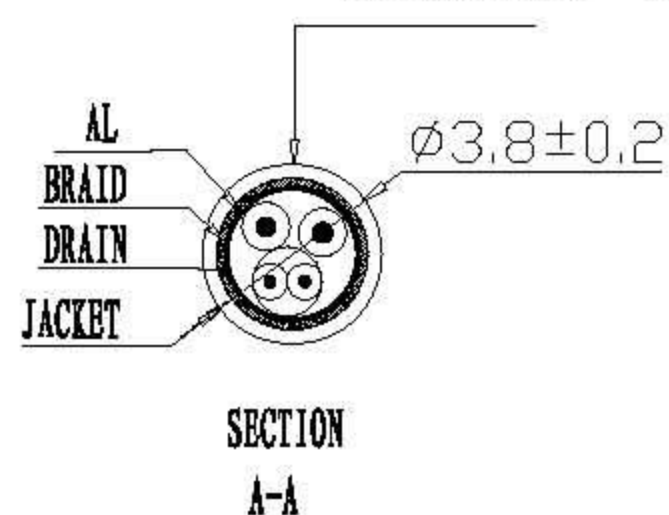

Pin Assignment

A MALE	MICRO B
1	1 RED (28AWG)
2	2 WHITE (28AWG)
3	3 GREEN (28AWG)
4	5 BLACK (28AWG)
Shell	Shell
	Drain

ITEM NO	QTY	DESCRIPTION	COLOR
11. 99. 8752	10	VALUE USB2.0 Cable, TypeAM-Micro BM, 1.8m	white
11. 99. 8754	10	VALUE USB2.0 Cable, TypeAM-Micro BM, 0.8m	white
11. 99. 8755	10	VALUE USB2.0 Cable, TypeAM-Micro BM, 3.0m	white

Note:

1. Conductor material: Bare copper
2. Braid material: AL-MG braiding
3. Drain material: Tinned copper wire

④	MOLDING	OUTER MOLD: 45P PVC COLOR, white	9	G
③	USB-MICRO B	USB MICRO B MALE CONNECTOR FLASH GOLD ; NICKEL PLATED SHELL	1	SET
②	USB-AM	USB AMALE CONNECTOR FLASH GOLD ; NICKEL PLATED SHELL	1	SET
①	CABLE	USB CABLE 28AWG/1P+28AWG/2C+AL+BRAID (48*0.12mm AL-MG braiding) +Drain (7*0.12 Tinned copper wire) PVC JACKET OD: 3.8 ± 0.2mm , COLOR: WHITE 433#	L	M
NO	P/N	DESCRIPTION	QTY	UNIT

								Rotronic Co., Ltd.			
								USB AM/BMICRO-XXX			
								USB.AM.MICRO.XX.3			
REMARK NO	CHANO	SIGNATURE	DATE								
DRAWN BY	MORGAN			SIGN		W.T	SCALE				
CHECKED BY											
AUDITED BY		APPROVED BY	QIJUNJIBN								
CRAFT		DATE	2010. 12. 30	PAGE OF							