



Datenblatt - Fiche technique - Data sheet


11.99.8871



VALUE USB 3.0 Kabel, Typ A-B, 3,0m

VALUE Câble USB 3.0 Type A-B, 3.0m


VALUE USB 3.0 Cable, A - B, M/M, 3.0 m

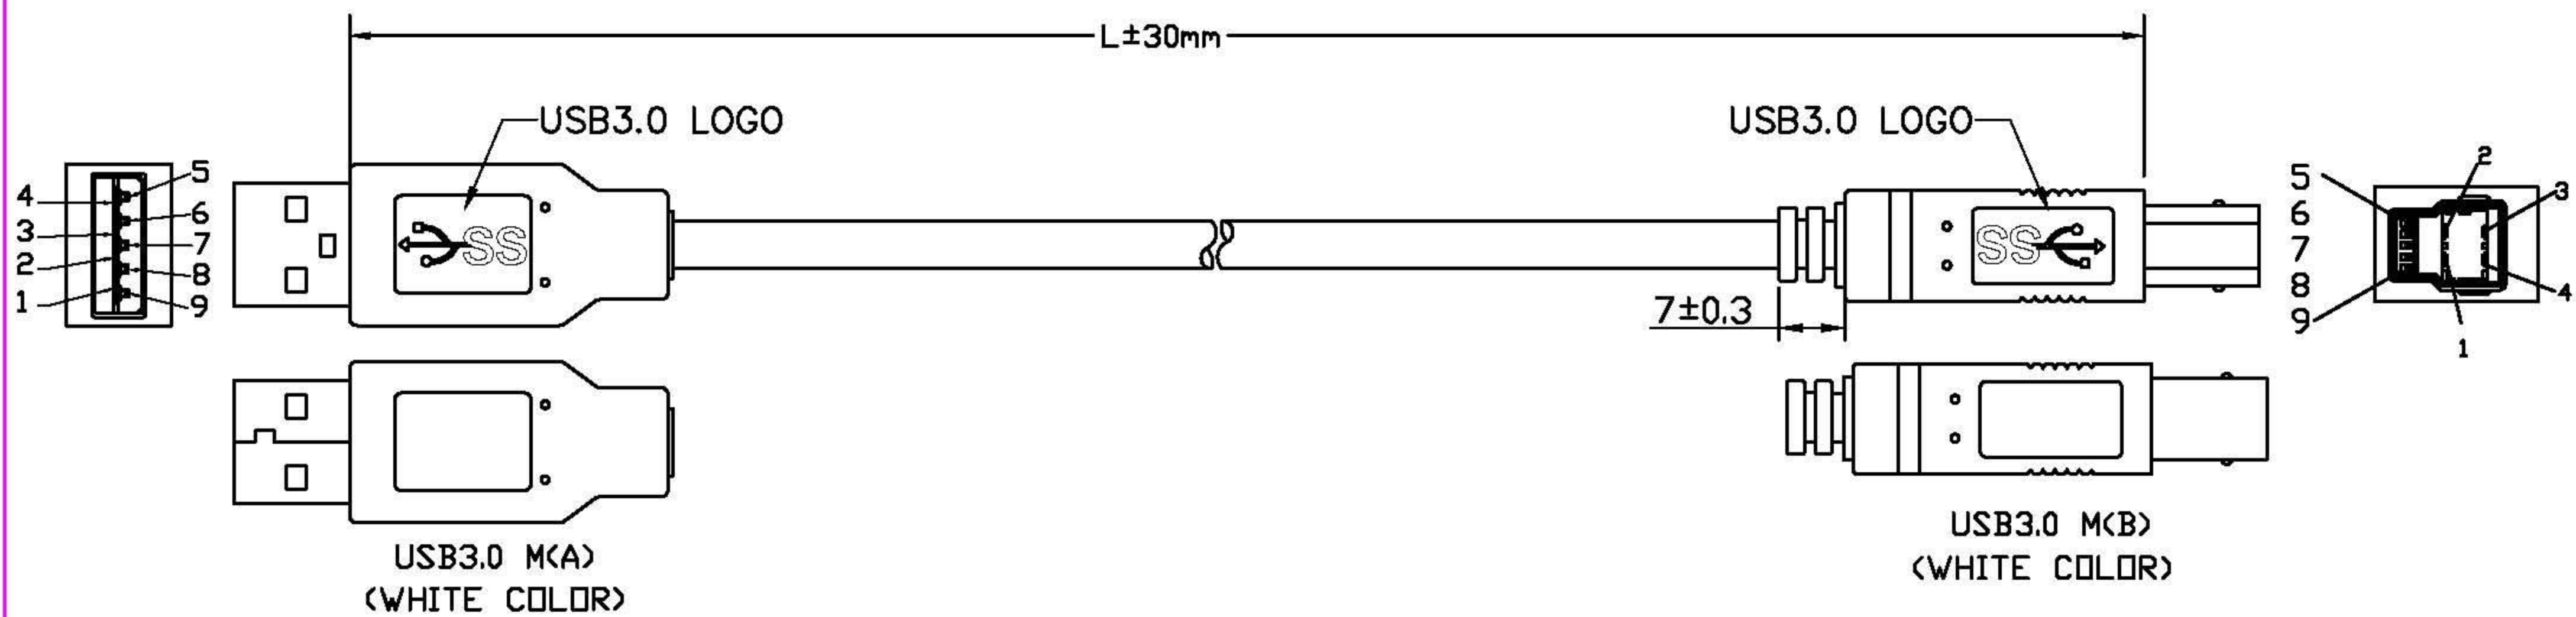

ITEM NO	COLOR	LENGTH	PE BAG	CARTON	PE LABEL
11.99.8870	WHITE	1.8M	0.06*190*300mm	K=K 1.0' 45*33*18CM Q'TY: 50PCS/CTN	8*4CM 11.99.8870 (761199018835)
11.99.8871	WHITE	3.0M	0.06*190*300mm	K=K 1.2' 44*33*22CM Q'TY: 50PCS/CTN	8*4CM 11.99.8871 (761199018836)

NOTE: PACKING: 1PCS/PE BAG+ EAN


- CABLE: UL2725, AL+B-FOIL, (28AWG*1P)+[AL+MY-FOIL, (28AWG*1P+D)]*2+24AWG*2C. WHITE COLOR, OD=5.5±0.2mm, PVC JACKET.
- LENGTH: L.
- CONNECTORS: USB3.0 M(A)*1PCS, USB3.0 M(B)*1 (BLUE INSULATOR) (SHELL NICKEL).
- MOLD: MOLDING USB TYPE.
- CONTACTS:

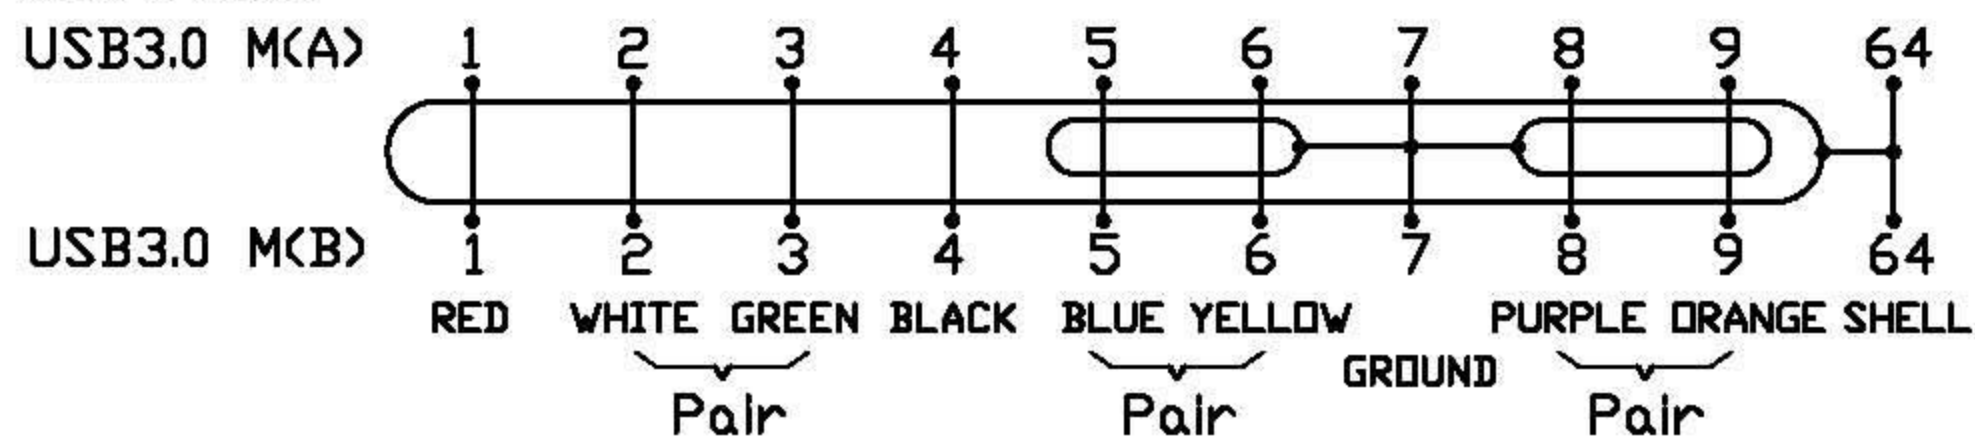

WHITE/GREEN PAIR...28AWG, RED/BLACK...24AWG

- Test machine test condition.
 - 100% OPEN, SHORT & INTERMITTANCE TEST.
 - CONDUCTOR RESISTANCE: 3ohms MAX.
 - INSULATION RESISTANCE: 5M Min / 10ms.

7. ALL MUST BE MEET ON ROHS COMPLIANT.

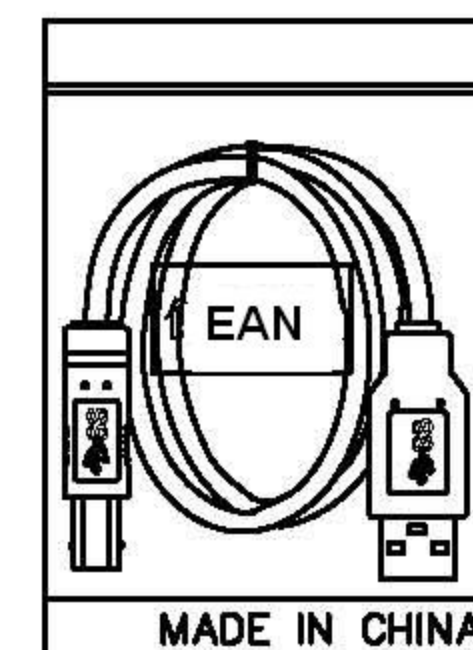

PE BAG(190*300*0.06)

REVISION	DATE	DISCRIPTION	DRAWN BY	DESIGNED BY	APPROVAL BY	VALUE	SCALE	NON
REV.A/0	2011.03.01					VALUE USB 3.0 Cable, Type A-B, white		
REV.A/1	2011.11.16				Rotronic Co., Ltd.		UNIT(mm)	
							PAGE	1/1