



Datenblatt - Fiche technique - Data sheet


11.99.8876



VALUE USB 3.0 Kabel, A ST - Micro B ST, 0,15m

VALUE USB 3.0 Cable, A M - Micro B M, 0,15m

VALUE USB 3.0 Cable, A - Micro B, M/M, 0.15m

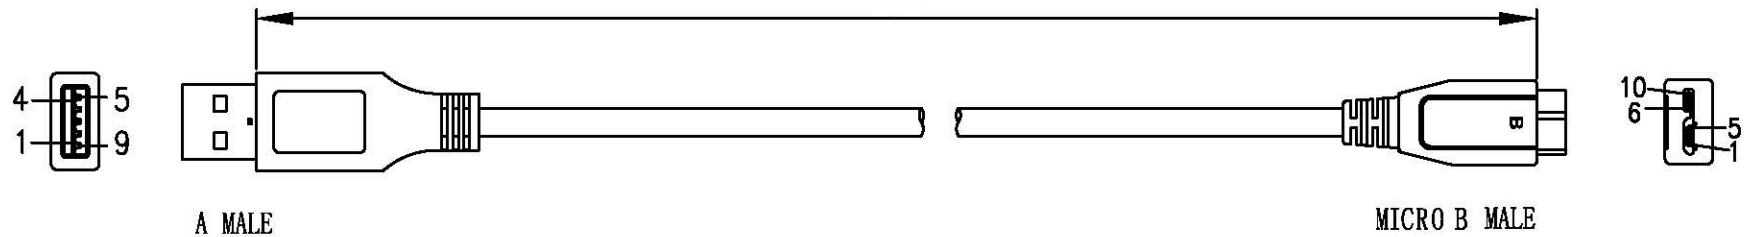

NOTES:

1. MATERIAL

1.1 CABLE: (7/0.12BC*1P+7/0.12BC+FAM)*2PCS+7/0.20TC*2C+7/0.12TC*1P
 +AM+7/0.12BC+128/0.12ALM+WHITE (KKE75-4010-75) PVC JACKET
 OD=∅5.5 ±0.15MM

CABLE PRINTING: E324703  AWM STYLE 2725 80°C 30V USB 3.0 CABLE



1.2 P1: USB 3.0 A TYPE MALE: SOLDER TYPE, BLUE PET INSULATION,
 NICKEL PLATED CONTACTS AND SHELL

1.3 P2: USB 3.0 MICRO B TYPE MALE: SOLDER TYPE, BLUE PET INSULATION,
 NICKEL PLATED CONTACTS AND SHELL

1.4 ALL HOOD: MOLDED WHITE (KKCS50-4010-85), PVC



2. TESTING: 100% OPEN AND SHORT TEST

PIN OUT

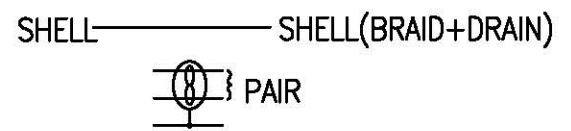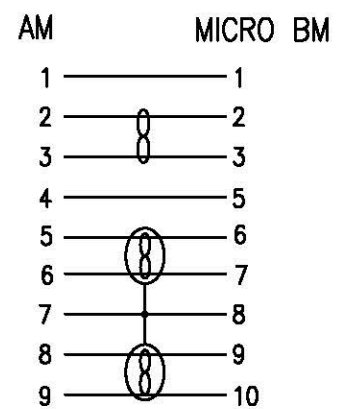

Item no. Chart

item no.	Length
11.99.8876	150 ⁺³⁰ / ₋₀ MM
11.99.8877	3000 ± 70 MM

LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	ENG: SUMIN	11.99.8876, 11.99.8877
ANGLE TOLERANCE:	UNIT: mm		
X' ± 3' .X' ± 1'	VERSION: 00	 	VALUE USB 3.0 Cable, A - Micro B, M/M, white
	PAGE:	1/1	DRAWING NO: 1023

00	NEW ISSUE	2014-8-25
REV.	MODIFY DESCRIPTION	DATE

ro-tronic

APPROVED: