



Datenblatt - Fiche technique - Data sheet

**12.03.2016**



ROLINE 15pol. HD Stecker-Stecker



Connecteur HD mâle / mâle 15 pôles

ROLINE Mini Gender Changer, 15-pin HD M - M



\*\*\* A02 SERIES \*\*\*

# HD15MM

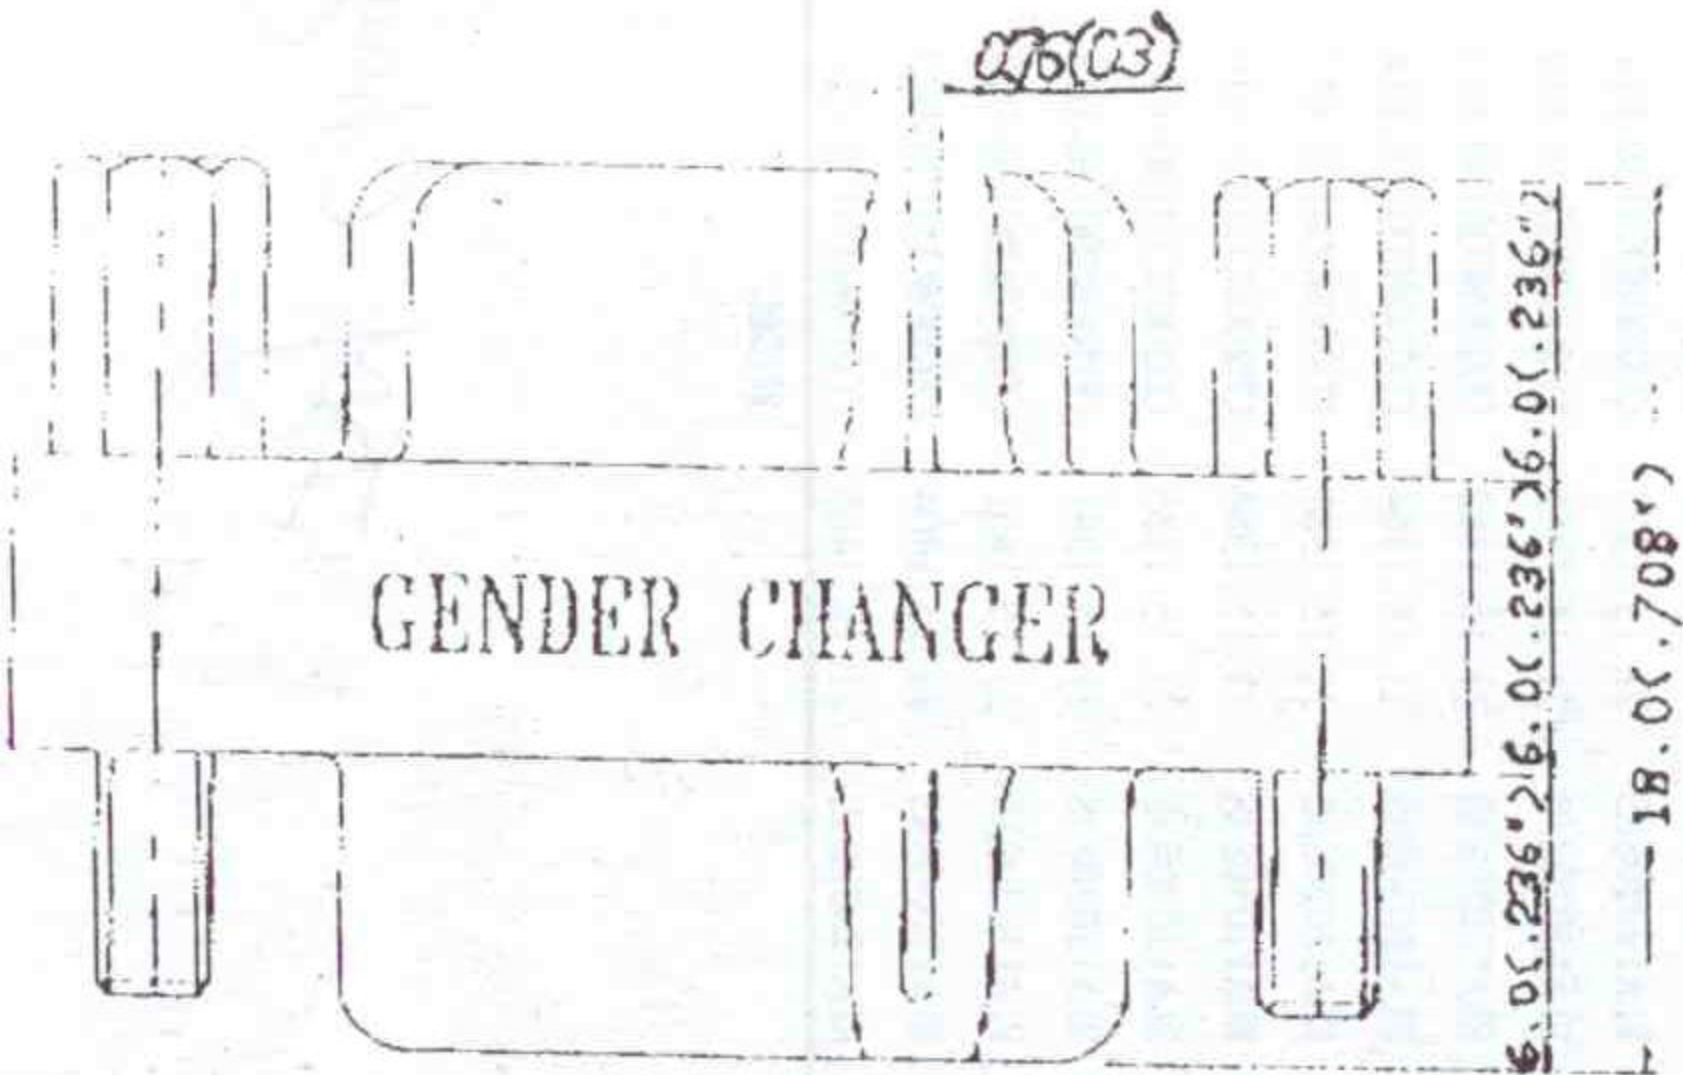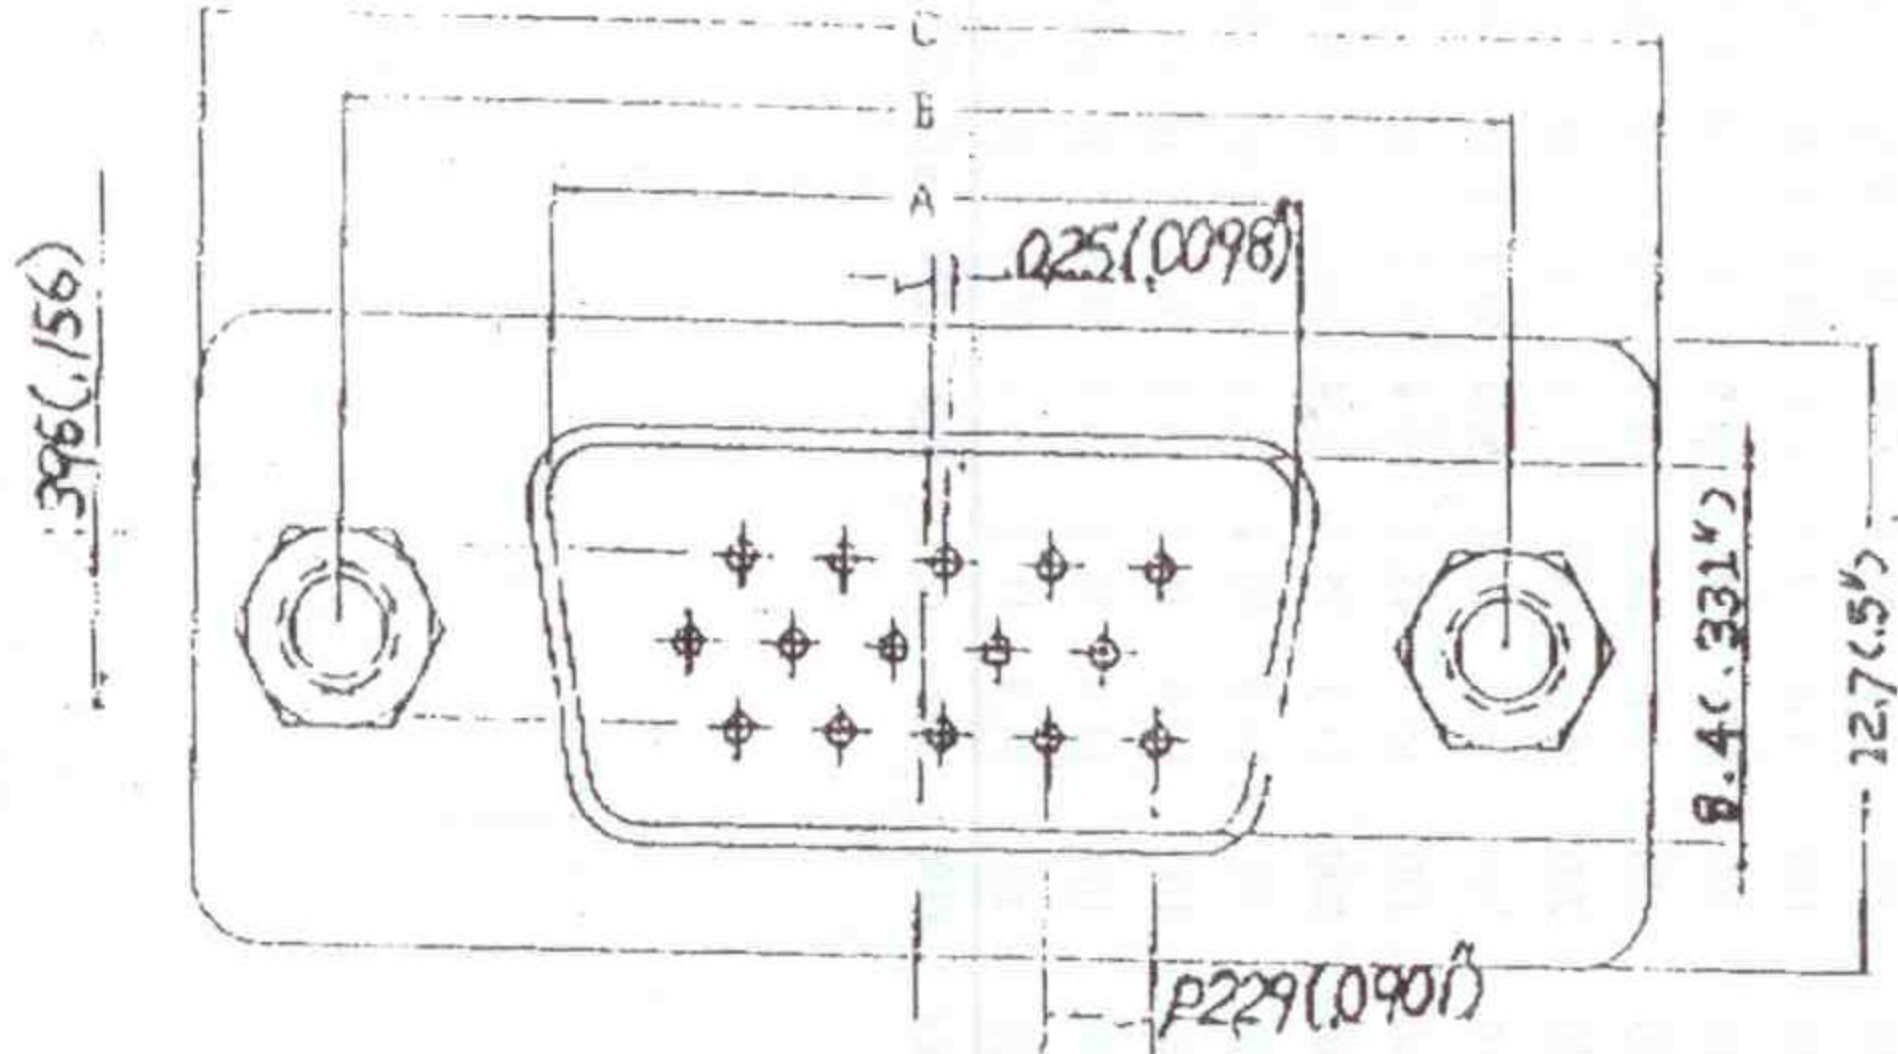

- SPECIFICATION:
- VOLTAGE RATING: 300VAG(rms).
  - CURRENT RATING: 5 AMP CONTINUOUS.
  - DIELECTRIC STRENGTH: 1000VAG.
  - CONTACT RESISTANCE: 10mΩ MIN.
  - INSULATION RESISTANCE: 5000 MΩ MIN.
  - DURABILITY: 30 CYCLES FOR GOLD FLOSH, 150 CYCLES FOR 15μ' GOLD PLATED.
  - CORROSION RESISTANCE: MEET MIL-STD-202F METHOD 101 CONDITION BSALT WATER SPRAY FOR GOLD PLATED OVER 15μ'.
- MATING FORCE: INSERTION FORCE: 1 DZ-16 DZ  
 AVERAGE 150 GRAM.  
 EXTRACTION FORCE: 1 KG MIN.

PART NO.	Circuits	A	B	C
0151	15	16.9(.665')	25.0(.984')	31.2(1.22')

REVISION	DESCRIPTION	DRAWN BY	CHECKED BY	APPROVAL	DRAWING NO.
△					
△					

Rotronic Co., Ltd.