




Datenblatt - Fiche technique - Data sheet

21.15.0302

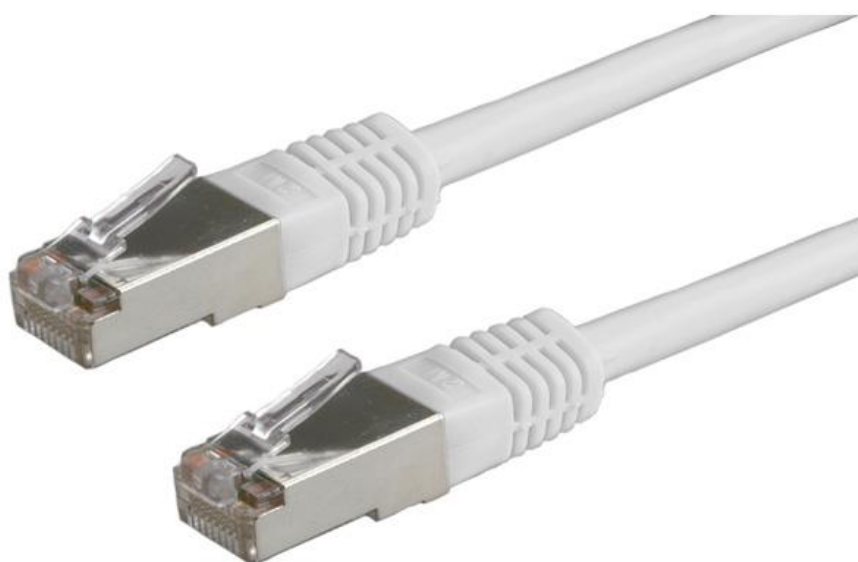

ROLINE S/FTP-Patchkabel konf. Kategorie 5e, grau, 2,0 m

Cordon ROLINE Cat.5e S/FTP AWG26, gris, 2,0 m

ROLINE S/FTP Patch Cord Cat.5e, grey, 2.0 m

1

2

3

4

5

6

Total length (optional)

PLUG A

PIN.8

PIN.1

PLUG B

PIN.1

PIN.8

6.6±0.1

21.2±0.3

30.0±0.3

11.7±0.3

roline SFTP PATCH CABLE 26AWG 4PR ISO/IEC11801 & EN50288
CAT.5E XXXXXXXX-X

11.7±0.1

length
mark

5.1±0.2

Remark : SCADAXX007X XXX X 10 XXX
(1) (2) (3) (4) (5)

(1) XX : Jacket Color

01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)
05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)
08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)
11=Pink(RAL4003)

(2) X : Wiring

1=T568A, 2=T568B, 3=T568A & T568B combination

(3) XXX : Length

(4) Length Unit : 1=cm, 2=meter, 3=feet.

(3)(4) : 0501=0.5meter(50cm), 0012=1meter, 0102=10meter
0033=3feet, 0103=10feet

(5) XXX :Flow NO.

Specification :

Material :

1. RJ45 Plug : (JE P/N : PRS8850-F/0.9)
 - 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
 - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
 - 1-4. Shield : Bronze with Nickel plated.
2. Molding : PVC.
3. Cable :
 - 3-1. Jacket : PVC.
 - 3-2. Conductor : 26 AWG stranded copper.
 - 3-3. Isolation : PE.
 - 3-4. Shield : Aluminum Foil, Tin Copper Braid.
4. Cable structure : SF/UTP, 4 twisted pair.

GENERAL
TOLERANCE
OF DIMENSIONS
X.XXX ±0.005
X.XX ±0.05
X.X ±0.1

5
5

DRAWING		06.OCT.2010		Connie		rotronic					
CHECK		06.OCT.2010		Maer							
APPROVAL		06.OCT.2010		Yty							
		DATE		NAME		ITEM NO.: 21.15.0305(5M)					
SCALE	1/1 (A4)	UNIT	mm			DES.: ROL-SST-C5E-CABLE					
		DRAWING NO.		21.15.0305(5M)SCADA020072005210001							
		DRAWING CLASSIFICATION		E	SHEET	1 OF 1					

1

2

0

3

4

10cm

5

6