




Datenblatt - Fiche technique - Data sheet

21.15.0826


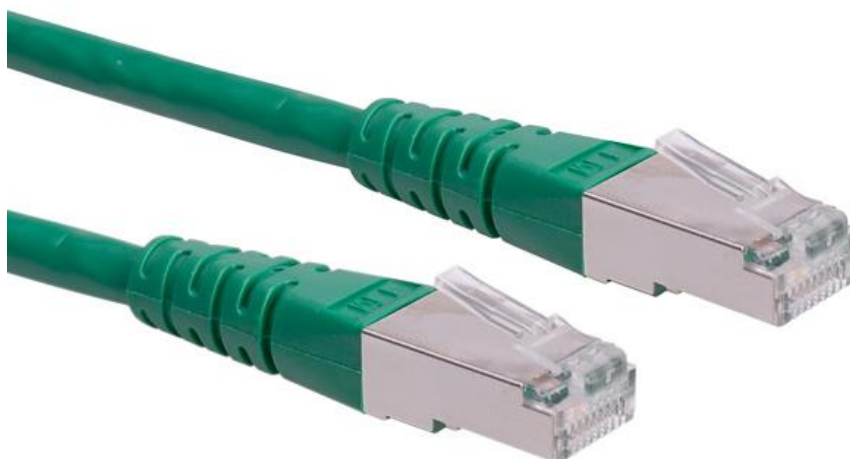


ROLINE S/FTP-(PiMF-)Patchkabel Kat.6, grün, 1,5m


Cordon ROLINE Cat.6 S/FTP (PiMF) vert, 1,5m

ROLINE S/FTP (PiMF) Patch Cord Cat.6, green, 1.5m

Total length (optional)

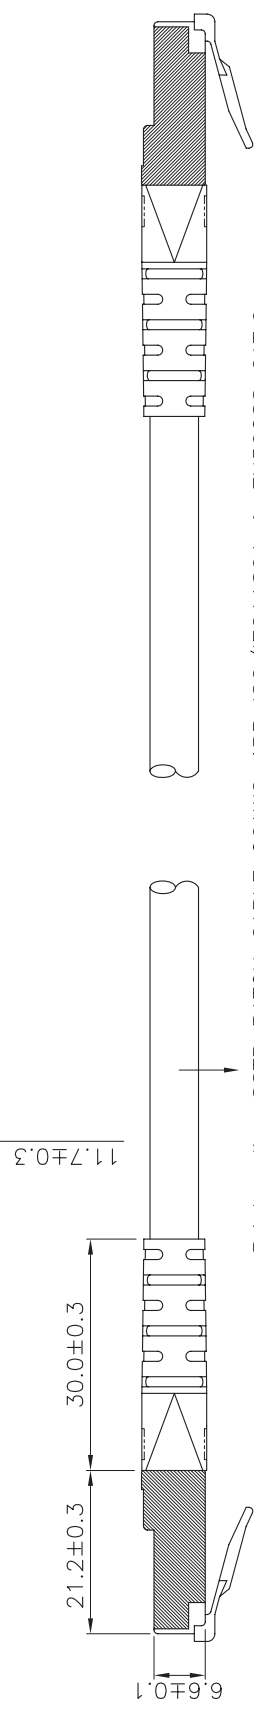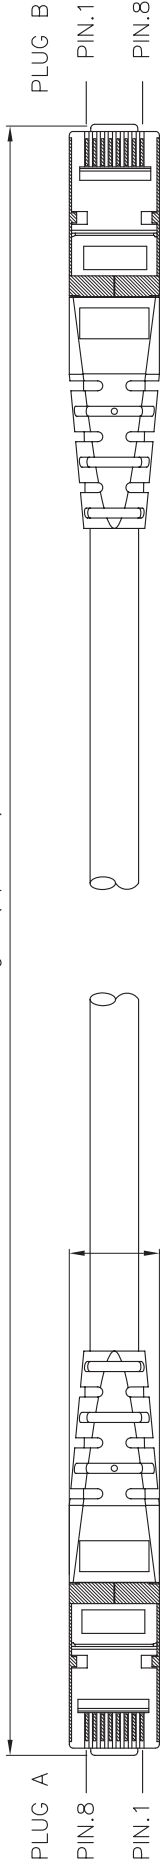

Print: roline SSTP PATCH CABLE 26AWG 4PR ISO/IEC11801 & EN50288 CAT.6
XXXXXXXX-X

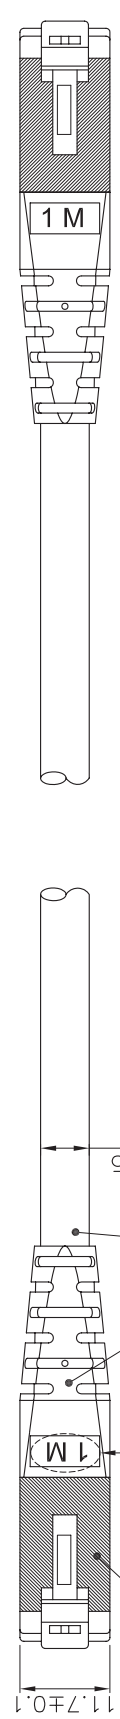

Remark : SCAEAXX017X XXX X E1201

(1) XX : Jacket Color (2) (3) (4)

- 01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)
- 05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)
- 08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)
- 11=Pink(RAL4003)

(2) X : Wiring

1=T568A, 2=T568B, 3=T568A & T568B combination

(3) XXX : Length

(4) Length Unit : 1=cm, 2=meter, 3=feet.

- (3)(4) : 0301=0.3meter(30cm) 0501=0.5meter(50cm),
- 0012=1meter, 0102=10meter
- 0033=3feet, 0103=10feet

Remark#

| | | | | | |
|------------|------|--------|------------|------|-------|
| 21.15.0823 | 1.5m | grey | 21.15.1346 | 2.0m | white |
| 21.15.0824 | 1.5m | red | 21.15.1356 | 3.0m | white |
| 21.15.0825 | 1.5m | yellow | 21.15.1366 | 5.0m | white |
| 21.15.0826 | 1.5m | green | 21.15.1376 | 7.0m | white |
| 21.15.0827 | 1.5m | blue | 21.15.1386 | 10m | white |
| 21.15.0828 | 1.5m | black | 21.15.1396 | 15m | white |
| 21.15.0829 | 1.5m | white | 21.15.1406 | 20m | white |
| 21.15.1316 | 0.3m | white | | | |
| 21.15.1326 | 0.5m | white | | | |
| 21.15.1336 | 1.0m | white | | | |

Specification :

Material :

- 1. RJ45 Plug : (JE P/N : P028850)
- 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
- 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
- 1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
- 1-4. Shield : Bronze with Nickel plated.
- 2. Molding : PVC.
- 3. Cable :
 - 3-1. Jacket : PVC.
 - 3-2. Conductor : 26 AWG stranded copper.
 - 3-3. Isolation : PE.
 - 3-4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
- 4. Cable structure : S/FTP, 4 twisted pair.

GENERAL TOLERANCE OF DIMENSIONS
X.XXX ±0.005
X.XX ±0.05
X.X ±0.1

| | | |
|----------|-------------|------|
| DRAWING | 10.JAN.2011 | Abby |
| CHECK | 10.JAN.2011 | Maer |
| APPROVAL | 10.JAN.2011 | YTY |

| | | | |
|------------------------|---------------------------|-------|--------|
| SCALE | 1/1 (A4) | UNIT | mm |
| DRAWING NO. | SCAEAXX017XXXXXE1201(SA1) | | |
| DRAWING CLASSIFICATION | S | SHEET | 1 OF 1 |

Rotronic Co.,Ltd.

ITEM NO.:SCAEAXX017XXXXXE1201

DES.: C6 S/FTP Patch Cord

