



Datenblatt - Fiche technique - Data sheet

**21.15.0851**




ROLINE S/FTP-Patchkabel Kat.7, LSOH, grau, 1,0 m


Cordon ROLINE Cat.7 S/FTP, LSOH, gris, 1,0 m

ROLINE S/FTP Patch Cord Cat.7, LSOH, grey, 1.0 m

⚠ Length (listed below)

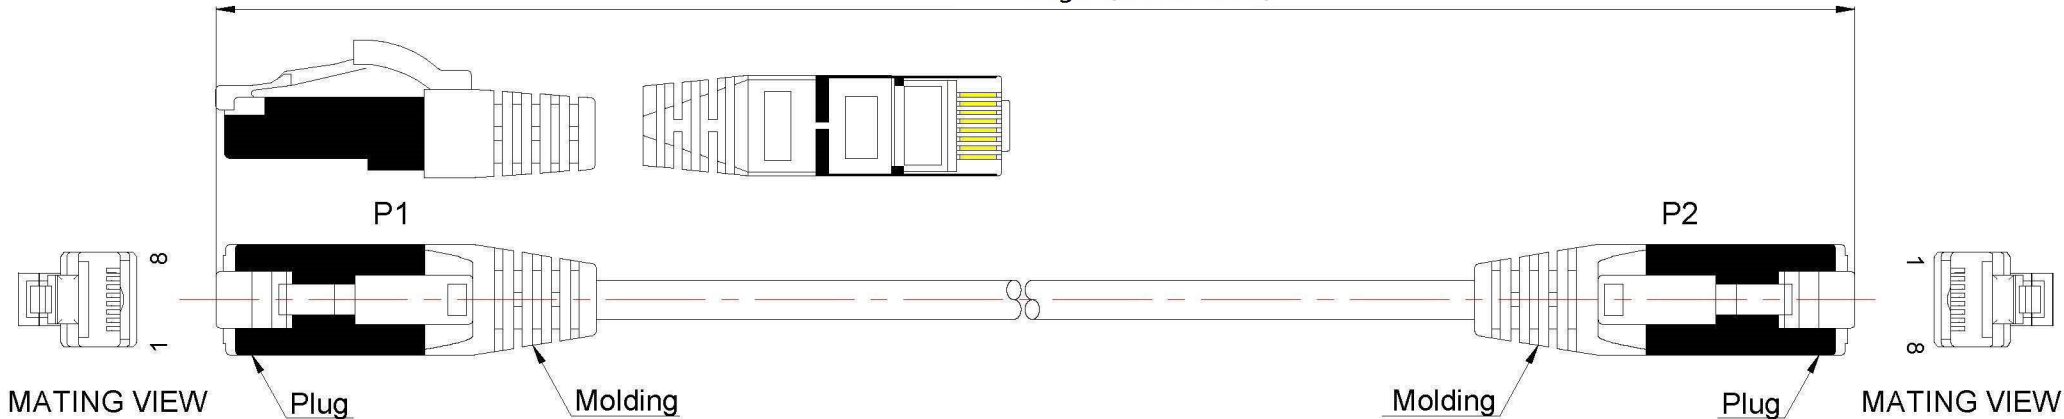

Marking: CAT.7 SSTP LSOH 26AWGX4P PATCH VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-4-2 & IEC 60332-1-2

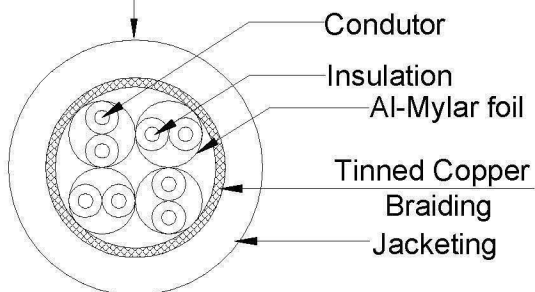

Item no. Chart

21.15.0854	0.5m
21.15.0851	1m
21.15.0852	2m
21.15.0853	3m
21.15.0855	5m

orange 2  
white/orange

green 3  
white/green

blue 1  
white/blue

brown 4  
white/brown

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 26AWG	
Insulation	Thickness:MIN at any point: 0.20mm MAX AVG: 0.35mm Diameter: 1.05±0.06mm	
Jacket	LSOH	Thickness:MIN at any point: 0.50mm MAX AVG: 0.60mm Diameter: 5.8±0.2mm
Braiding	Tinned Copper	
Wire	CAT.7 SSTP STR 26AWGX4P	
Plug	8P8C 50μ"	
Color	Grey852	

Note:  
minimum of the bending  
radius  $\geq$  25mm

Key Size	3RD		
	⚠	⊕	⊖
Length (mm)	Critical	Normal	General
0-15	±0.05	±0.10	±1.0
15-60	±0.10	±0.20	
60-150	±0.15	±0.35	±1.5
150-350	±0.20	±0.50	
350-1000	±0.40	±0.65	±2.0

**rotronic**

21.15..0854, 21.15.0851, 21.15.0852, 21.15.0853, 21.15.0855

ROLINE Cat. 7 SSTP Patch Cord, LOHS, grey

UNIT	mm	APPROVAL	CHECKER	DRAWER
PAGE	1/1	2014.02.14 Candy	2014.02.14 蔡秀云	Vinci
Draw.No.				