



Datenblatt - Fiche technique - Data sheet

**21.15.0878**




ROLINE S/FTP-(PiMF-)Patchkabel Kat.6a, Massivdraht, LSOH, grau, 70,0 m

Cordon ROLINE Cat.6a S/FTP (PiMF) solide LSOH, gris, 70,0 m

ROLINE S/FTP Patch Cord Cat.6a, solid, LSOH, grey, 70.0 m

1 2 3 4 5 6

Length (see below list)

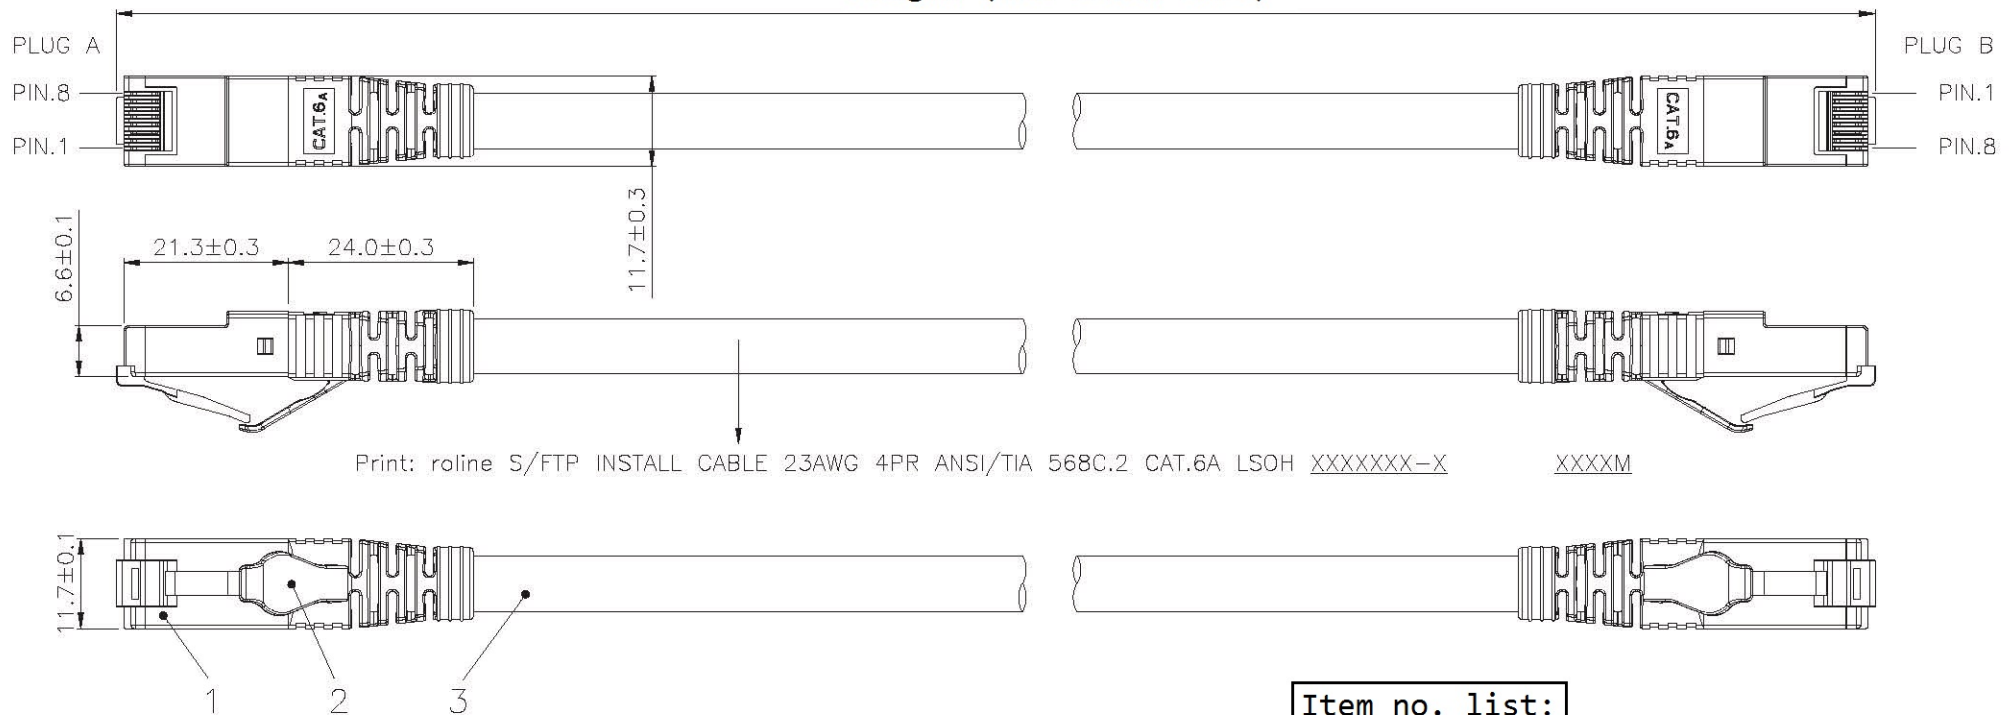

Specification :

Material :

1. RJ45 Plug :
  - 1-1. Housing : Polycarbonate, UL 94V-2, Blue color
  - 1-2. Contact finished : Min. 50 micro-inch Gold plating over min. 50 micro-inch Nickel plating on surface contact area
  - 1-3. Contact material : Phosphor Bronze
  - 1-4. Shield : Zinc Alloy with Nickel plated
2. SR : PC 2250 UL 94V-2
3. Cable : 23AWG Solid wire, wiring:T568B
  - 3-1. Jacket : LSOH, Gray(RAL7035)
  - 3-2. Conductor : 23 AWG Solid copper
  - 3-3. Isolation : Foam PE
  - 3-4. Shield : Aluminum Foil
  - 3-5. Cable structure : S/FTP, 4 twisted pair
4. Minimum of the bending radius: 50mm

Item no. list:

21.15.0874	20m	21.15.0878	70m
21.15.0876	30m	21.15.0879	90m
21.15.0877	50m		

Item no.	21.15.0874, 21.15.0876, 21.15.0877, 21.15.0878, 21.15.0879			
Description	ROLINE Cat. 6a S/FTP Patch Cord, Solid, LSOH, grey			
*#: Matching DIM. *#: Important DIM. Others General DIM.	DRAWING	03.Jul.2014	byz	<b>rotronic</b>
	CHECK	03.Jul.2014	Jane	
	APPROVAL	03.Jul.2014	Frank	
GENERAL TOLERANCE OF DIMENSIONS	SCALE	1/1 (A4)	UNIT	mm
		DATE	NAME	
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING NO. ACBUEXX072XXXXX(SA1)		DRAWING CLASSIFICATION	
		S	SHEET	1 OF 1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

1 2 3 4 5 6 10cm