




Datenblatt - Fiche technique - Data sheet

**21.15.1341**



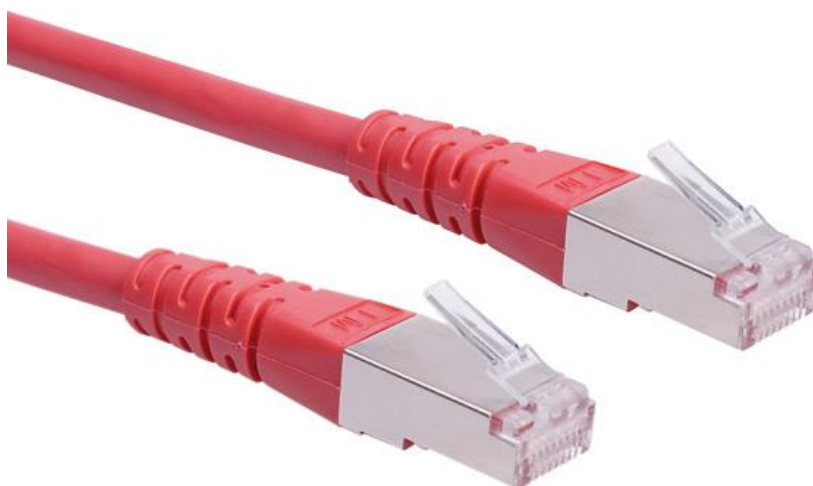


ROLINE S/FTP-(PiMF-)Patchkabel Kat.6, rot, 2m

Cordon ROLINE Cat.6 S/FTP (PiMF) rouge, 2,0m

ROLINE S/FTP (PiMF) Patch Cord, Cat.6, red, 2.0m

Total length (optional)

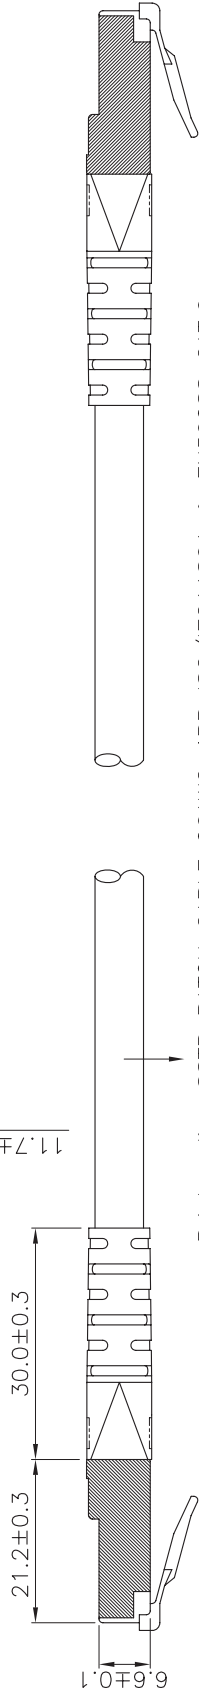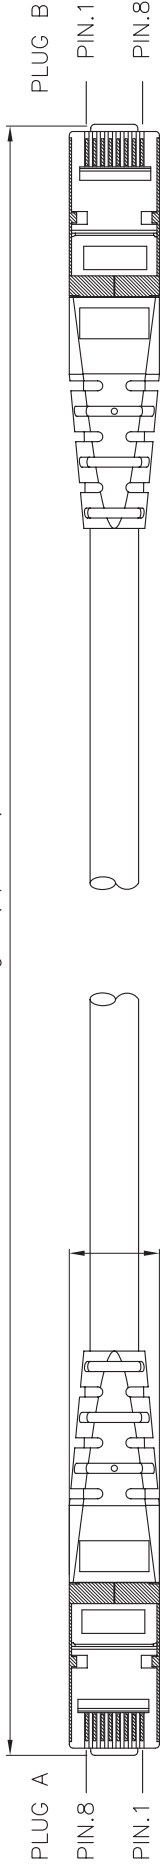

Remark : SCAEAXX017X XXX X E1201

- (1) XX : Jacket Color  
01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)  
05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)  
08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)  
11=Pink(RAL4003)
- (2) X : Wiring  
1=T568A, 2=T568B, 3=T568A & T568B combination
- (3) XXX : Length
- (4) Length Unit : 1=cm, 2=meter, 3=feet.  
(3)(4) : 0301=0.3meter(30cm) 0501=0.5meter(50cm),  
0012=1meter, 0102=10meter  
0033=3feet, 0103=10feet

Remack#

|            |      |        |            |      |       |
|------------|------|--------|------------|------|-------|
| 21.15.0823 | 1.5m | grey   | 21.15.1346 | 2.0m | white |
| 21.15.0824 | 1.5m | red    | 21.15.1356 | 3.0m | white |
| 21.15.0825 | 1.5m | yellow | 21.15.1366 | 5.0m | white |
| 21.15.0826 | 1.5m | green  | 21.15.1376 | 7.0m | white |
| 21.15.0827 | 1.5m | blue   | 21.15.1386 | 10m  | white |
| 21.15.0828 | 1.5m | black  | 21.15.1396 | 15m  | white |
| 21.15.0829 | 1.5m | white  | 21.15.1406 | 20m  | white |
| 21.15.1316 | 0.3m | white  |            |      |       |
| 21.15.1326 | 0.5m | white  |            |      |       |
| 21.15.1336 | 1.0m | white  |            |      |       |

Specification :

Material :

1. RJ45 Plug : (JE P/N : P028850)  
1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.  
1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.  
1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
- 1-4. Shield : Bronze with Nickel plated.  
2. Molding : PVC.
3. Cable :  
3-1. Jacket : PVC.  
3-2. Conductor : 26 AWG stranded copper.  
3-3. Isolation : PE.  
3-4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
4. Cable structure : S/FTP, 4 twisted pair.

GENERAL TOLERANCE OF DIMENSIONS  
X.XXX ±0.005  
X.XX ±0.05  
X.X ±0.1

|                        |                      |              |
|------------------------|----------------------|--------------|
| DRAWING                | 10.JAN.2011          | Abby         |
| CHECK                  | 10.JAN.2011          | Maer         |
| APPROVAL               | 10.JAN.2011          | YTY          |
| SCALE                  | 1/1 (A4)             | UNIT mm      |
| DRAWING NO.            | SCAEAXX017XXXXXE1201 |              |
| DRAWING CLASSIFICATION | S                    | SHEET 1 OF 1 |

Rotronic Co.,LTd.

ITEM NO.:SCAEAXX017XXXXXE1201  
DES.: C6 S/FTP Patch Cord