

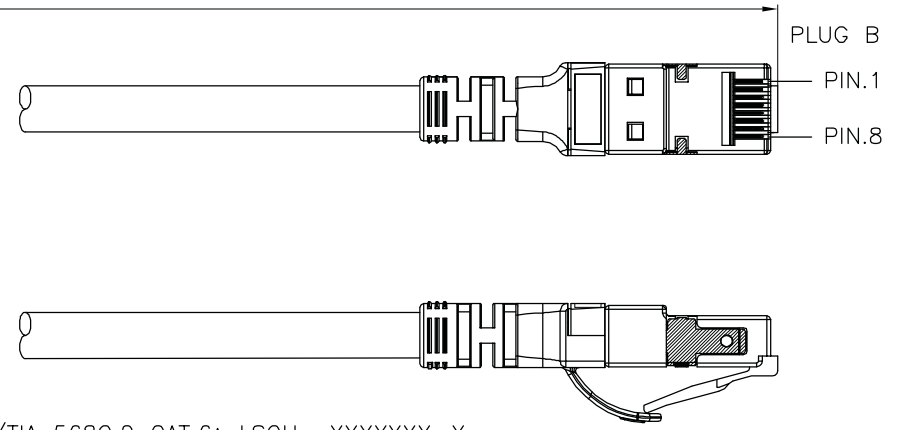
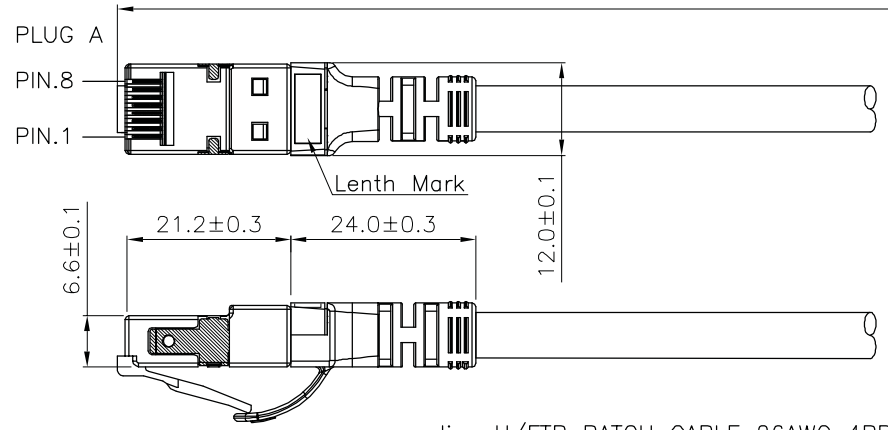


1 2 3 4 5 6

Length±xxmm



roline U/FTP PATCH CABLE 26AWG 4PR ANSI/TIA 568C.2 CAT.6A LSOH XXXXXX-X

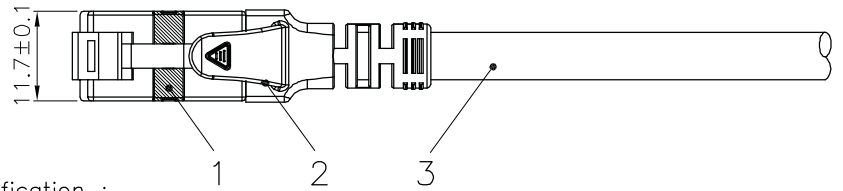

- (1) Jacket Color : Yellow(RAL1 02 1)
- (2) Wiring : T568B

item no.	length	tolerance
21.15.1430	0.5M	+20 -0
21.15.1431	1M	+20 -0
21.15.1432	2M	+20 -10
21.15.1433	3M	+20 -10
21.15.1435	5M	+30 -20
21.15.1436	7M	+30 -20
21.15.1437	10M	+30 -20
21.15.1438	15M	+30 -20
21.15.1439	20M	+70 -30

Specification :

Material :

- RJ45 Plug :
 - Housing : Polycarbonate, UL 94V-2, Transparent color
 - Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated
 - Contact finished : Min. 50 micro-inch Gold plated on surface contact area
 - Shield : Bronze with Nickel plated
- SR : SR-V95 FOR U/FTP Boot with nose
- Cable :
 - Jacket : LSOH
 - Conductor : 26 AWG stranded copper
 - Isolation : PE
 - Shield : Aluminum Foil Shielded for Each Pair, copper clad with steel
- Cable structure : U/FTP, 4 twisted pair
- Minimum Banding Radius: 50mm

item no	21.15.1430	21.15.1431	21.15.1432	21.15.1433	21.15.1435
	21.15.1436	21.15.1437	21.15.1438	21.15.1439	
Desc	ROLINE Cat 6a U/FTP Patch Cord,LSOH.Component Level,yellow				
"#": Matching DIM.	DRAWING	25.Aug.2015	byz		
"*": Important DIM.	CHECK	25.Aug.2015	Jane		
Others General DIM.	APPROVAL	25.Aug.2015	Jaimy		
GENERAL TOLERANCE OF DIMENSIONS	DATE		NAME		
	SCALE	1/1 (A4)	UNIT	mm	
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING NO.		DRAWING CLASSIFICATION		
	S		SHEET	1 OF 1	



No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

A
B
C
D

A
B
C
D

1 2 3 4 5 6
10cm