




Datenblatt - Fiche technique - Data sheet

21.15.1577



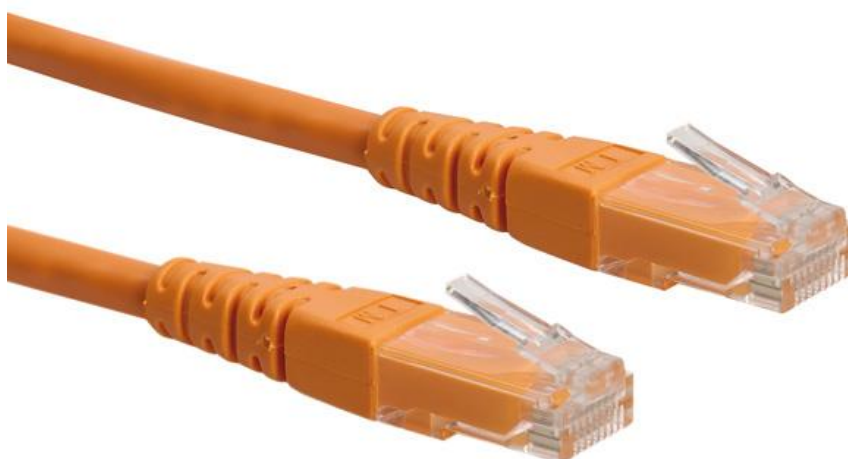


ROLINE UTP-Patchkabel Kat.6, orange, 7,0 m

Cordon ROLINE Cat.6 UTP, orange, 7,0 m

ROLINE UTP Patch Cord, Cat.6, orange, 7.0 m

Total length (optional)

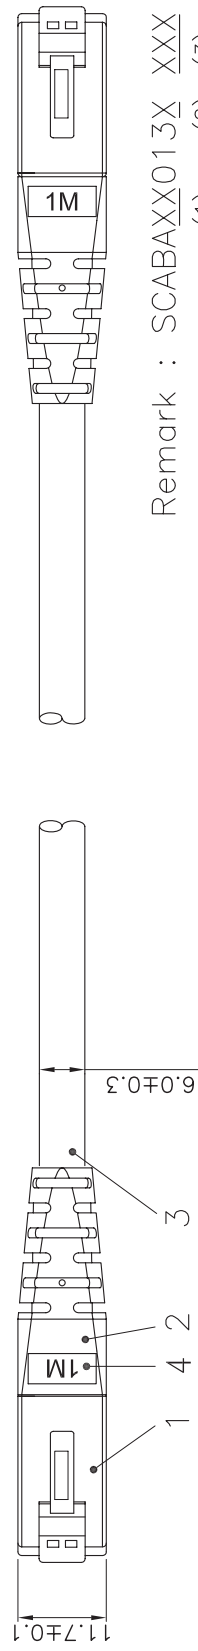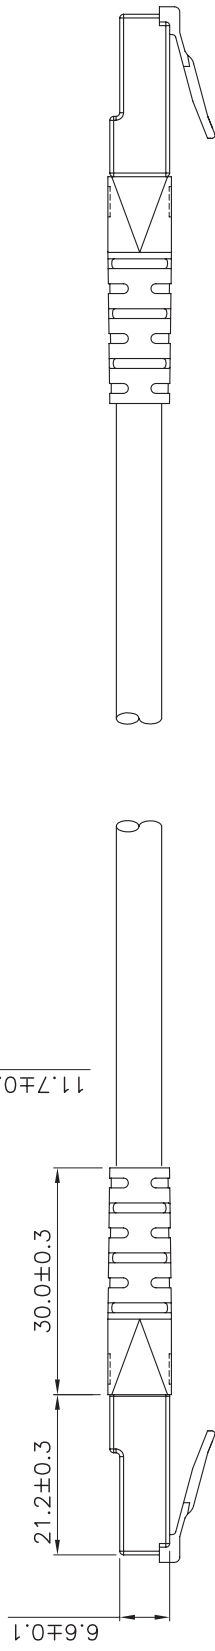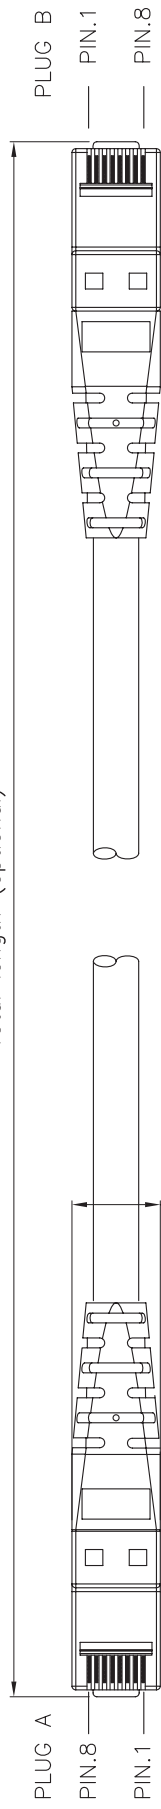

Remark : SCABAXX013X XXX XE1201
 (1) (2) (3) (4)

- (1) XX : Jacket Color
- 01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)
- 05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)
- 08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)
- 11=Pink(RAL4003)
- (2) X : Wiring
- 1=T568A, 2=T568B, 3=T568A & T568B combination
- (3) XXX : Length
- (4) Length Unit : 1=cm, 2=meter, 3=feet.
- (3)(4) : 0501=0.5meter(50cm), 0012=1meter, 0102=10meter
 0033=3feet, 0103=10feet

Specification :

- Material :
- 1. RJ45 Plug : (P/N : PU8850)
- 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
- 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
- 1-3. Contact finished : Min. 50 micro-inch Gold plated.
- 2. Narrow PVC Molded.
- 3. Cable : UTP UnShielded and Twisted,
 4 pair Stranded wire UL material approved.
 24 AWG conductor and PVC jacket.
- 4. length mark(latch side) : 0.3M,0.5M,0.75M,1M,1.5M,2M,3M,5M,7M,7.5M,
 10M,15M,20M,25M,30M.
- 5. Print : roline UTP PATCH CABLE 24AWG 4PR EIA/TIA-568B.2-1
 CAT.6 XXXXXXX-X

| | | | | | |
|------------------------|----------|-----------------|-----|-------------------------|--|
| DRAWING | | 17.MAR.2009 | | Connie | |
| CHECK | | 17.MAR.2009 | KLi | | |
| APPROVAL | | 17.MAR.2009 | Yty | | |
| SCALE | 1/1 (A4) | UNIT | mm | | |
| DRAWING NO. | | 21.15.XXXX(SAT) | | DRAWING CLASSIFICATION | |
| DRAWING CLASSIFICATION | | SHEET | | 1 OF 1 | |
| ITEM NO.: | | 21.15.XXXX | | DES.: C6 UTP Patch Cord | |
| | | | | | |
| | | | | | |

rotronic