


1 2 3 4 5 6

A


A

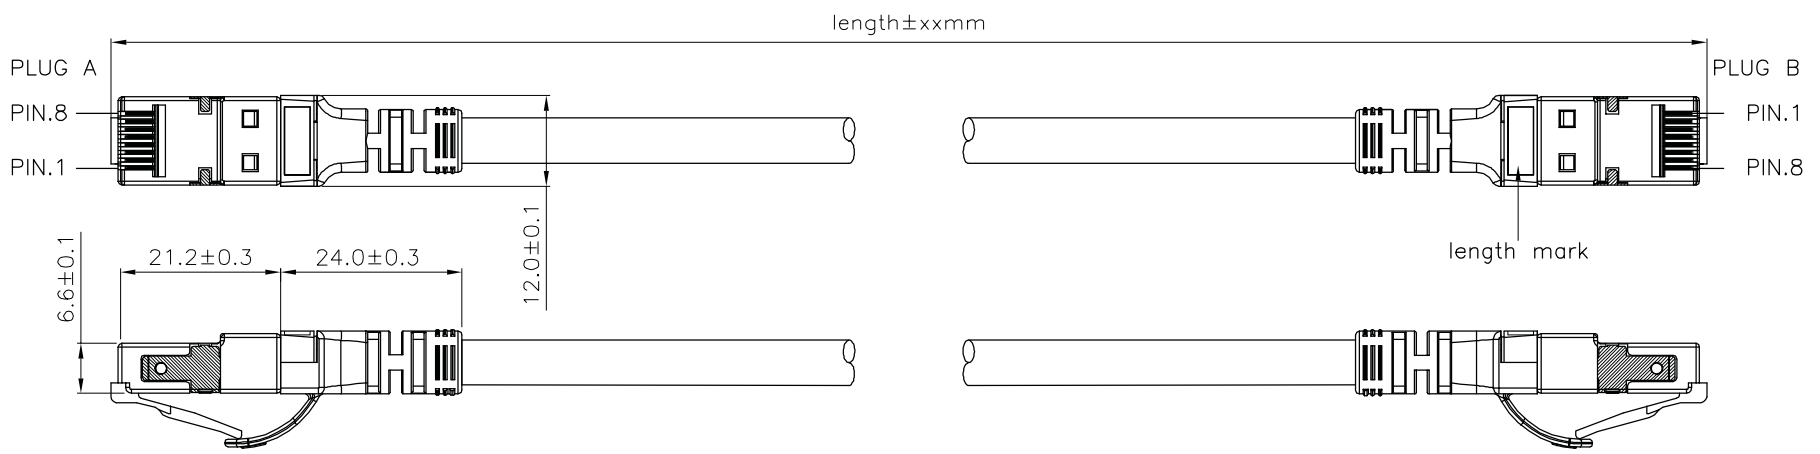

B

B

roline S/FTP PATCH CABLE 26AWG 4PR ISO/IEC 11801 & EN50288 CAT.6 LSOH XXXXXXXX-X

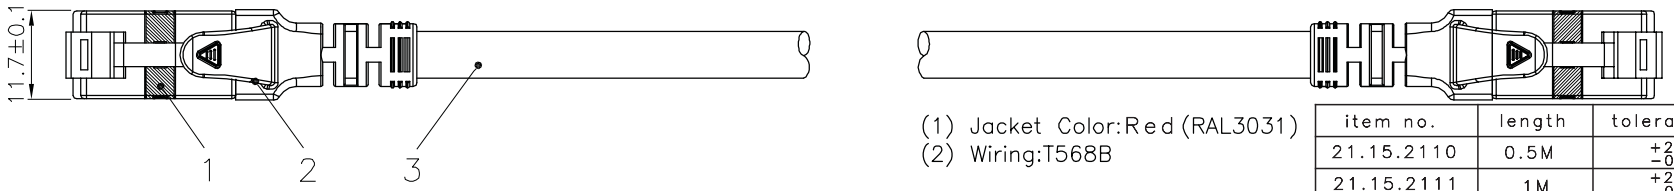

- (1) Jacket Color:Red (RAL3031)
- (2) Wiring:T568B

item no.	length	tolerance
21.15.2110	0.5M	+20 -0
21.15.2111	1M	+20 -0
21.15.2112	2M	+20 -10
21.15.2113	3M	+20 -10
21.15.2115	5M	+20 -20
21.15.2116	7M	+30 -20
21.15.2117	10M	+30 -20
21.15.2118	15M	+30 -20
21.15.2119	20M	+70 -30

Specification :

- Material :
1. RJ45 Plug : (JE P/N : PUS8850)
 - 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color
 - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated
 - 1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area
 - 1-4. Shield : Bronze with Nickel plated
 2. SR : SR-V95 FOR S/FTP Boot with nose
 3. Cable :
 - 3-1. Jacket : LSOH
 - 3-2. Conductor : 26 AWG stranded copper
 - 3-3. Isolation : PE
 - 3-4. Shield : Aluminum Foil Shielded for Each Pair, copper clad with steel braid
 4. Cable structure : S/FTP, 4 twisted pair
 5. Minimum Banding Radius: 50mm

C

C

D

D

item no	21.15.2110	21.15.2111	21.15.2112	21.15.2113	21.15.2115
	21.15.2116	21.15.2117	21.15.2118	21.15.2119	
Desc	ROLINE Cat 6 S/FTP Patch Cord,LSOH.Component Level,red				
"#": Matching DIM.	DRAWING	25.Aug.2015	byz		
"*": Important DIM.	CHECK	25.Aug.2015	Jane		
Others General DIM.	APPROVAL	25.Aug.2015	Jaimy		
GENERAL TOLERANCE OF DIMENSIONS		DATE	NAME		
X.XXX ±0.005	SCALE	1/1 (A4)	UNIT	mm	
X.XX ±0.05					
X.X ±0.1					
	DRAWING NO.				
	DRAWING CLASSIFICATION		S	SHEET	1 OF 1

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER

1 2 3 4 5 6 10cm