




Datenblatt - Fiche technique - Data sheet






21.17.3065

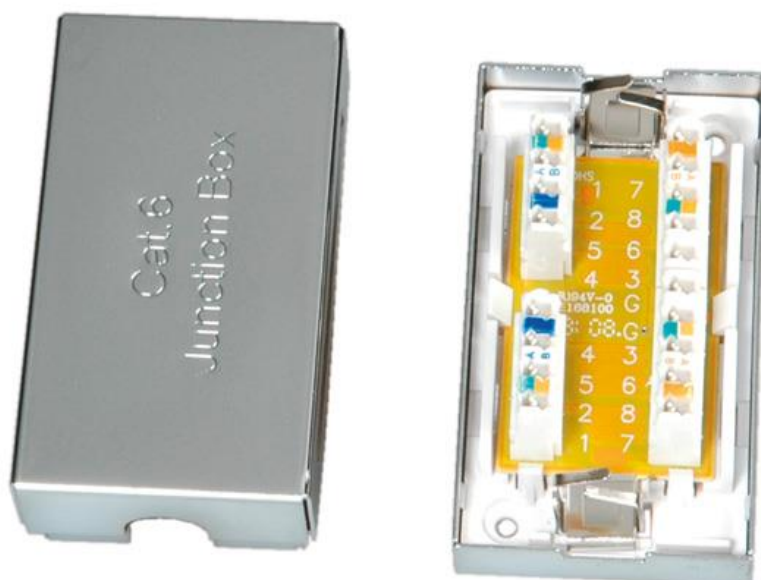

ROLINE Junction Box Kat. 6, STP

ROLINE Module de liaison Cat. 6, STP

ROLINE Junction Box Cat.6, STP

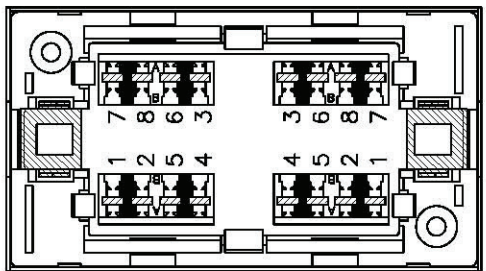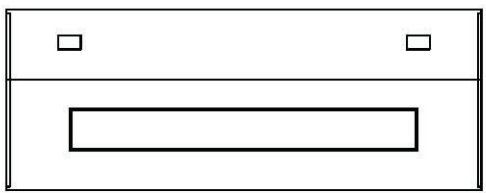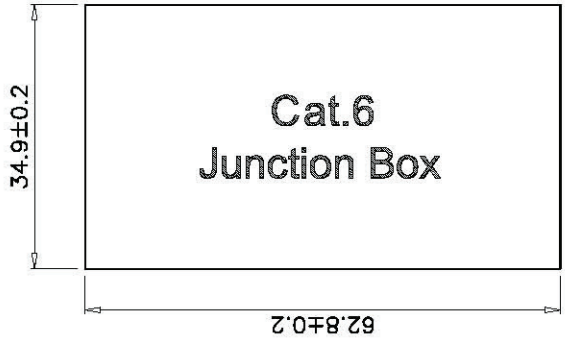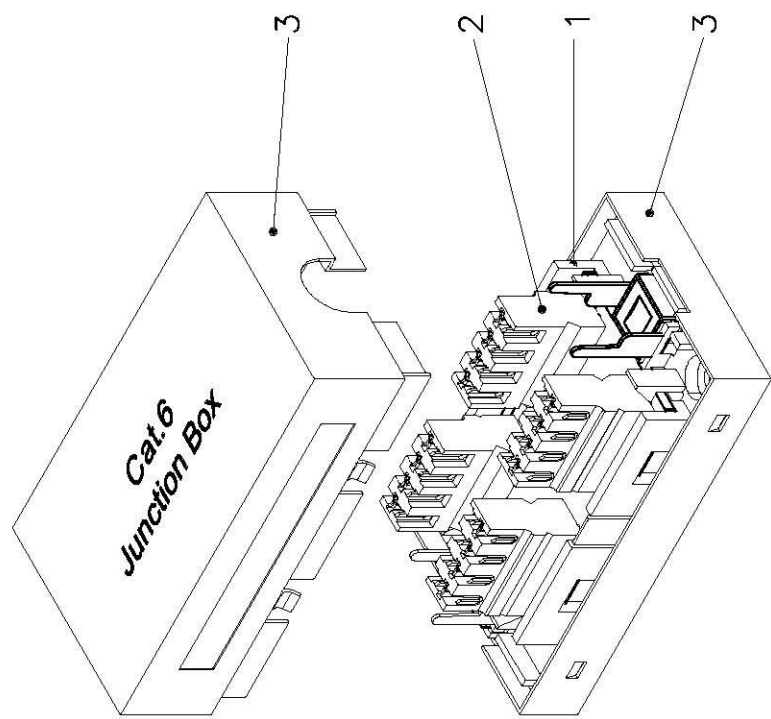

Specification :

- Material :**
1. Bottom base : ABS, UL 94V-0, in white color.
 2. IDC :
 - 2-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 2-2. Phosphor Bronze with Tin plated. 3. Metal Cover : SPCC, 0.5 mm thickness with Chromium plated.
 4. PCB : FR4, UL 94V-0.

- Performance :**
- a. T568A & T568B wiring.
 - b. Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
 - c. Durability :
 - *IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.
 - d. The Cat.6 transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard..

NO.	DESCRIPTION	P/N.	MATERIAL	QTY
	DRAWING	17.MAY.2013	YAN	
"#": Matching DIM.	CHECK	17.MAY.2013	MAER	
"*": Important DIM.	APPROVAL	17.MAY.2013	FRANK	
Others General DIM.	DATE	NAME	mm	
GENERAL TOLERANCE OF DIMENSIONS	SCALE	1/1 (A4)	UNIT	mm
X.XXX ±0.005			DRAWING NO.	
X.XX ±0.05			DRAWING CLASSIFICATION	S SHEET 1 OF 1
X.X ±0.1			ITEM NO.:	21.17.3065
			ROLINE Cat.6 Junction Box, shielded	



NO.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER
1					