


Quick Start Guide

Enterprise KVM Switch

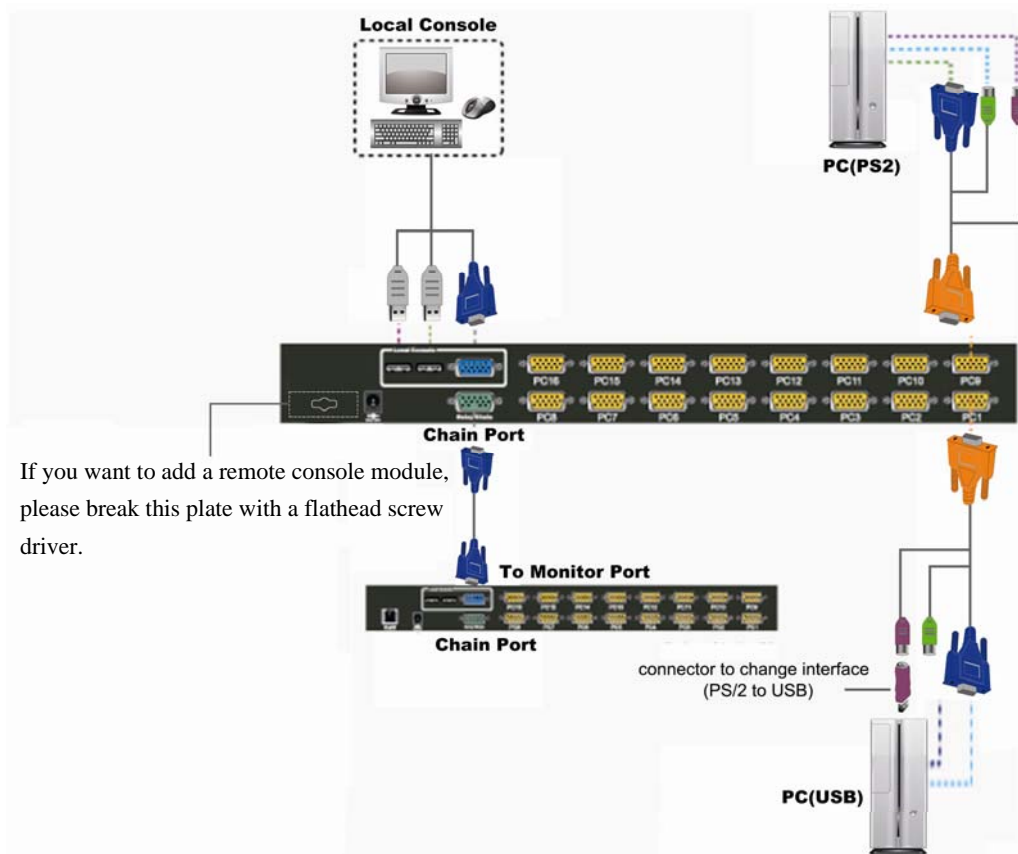

1 Package Checklist

- 1x KVM Switch Unit
- 1x CD-ROM (User manual, QSG)
- 1x AC to DC Power Adapter
- 1x Rack Mount Kit
- 1x Footpads set

2 Computer/Servers Installation



On the back of the KVM Switch, each of the 8/16 PC ports has a HDB15 type connector. Each cable that comes with the Switch has a 3-in-1 connector at one end and a single HDB15 male connector at the other end. Plug the single connector end of the cable into the KVM PC port, and then plug the other end of cable to a PC VGA port.

- (a) PS/2 computer --- Plug in the PS/2 mouse connector to the computer mouse port, then the PS/2 keyboard connector to computer keyboard port.
- (b) USB computer --- Install a PS/2-to-USB adapter to the keyboard PS/2 connectors, plug in USB connector to the PC USB port. This single USB port can handle both keyboard and mouse data.


3 Local Console Installation

Connect the keyboard, mouse, and monitor to the console port.


The default hotkey starts from “Caps Lock”+“Caps Lock”, then the keys on the table list.

Command	Function
Space bar	Brings up the OSD overlay screen
↑	Switches to the previous port
↓	Switches to following port
[1,2,...,8] bank, [01, 02,...,32] port	<ul style="list-style-type: none"> ■ The first digit is the Switch bank number, starting with “1”. The KVM switch on the daisy chain line is on bank 1 (the Master). A standalone KVM switch is also on bank 1. ■ The second & third digits are port numbers starting with “01”
Pg. Up	Switches to the previous bank
Pg. Dn	Switches to next bank
B	Turns the beep sound on/off
R	For SUPERVISORS that will set the OSD back to the factory default value (except the User Security settings).
S	For SUPERVISORS that activates the Auto-Scan function
U	For SUPERVISORS that turns the Security function on/off. (Default is off).
P	Log out, that’s only valid when the security is on.

Example #1 – To bring up the OSD overlay window, press “**Caps Lock**”, “**Caps Lock**”, and the “**Space Bar**”. Immediately, the OSD overlay screen will appear. The superimposed menu screen is generated by the KVM switch, which will not affect your computers or software function in any way.

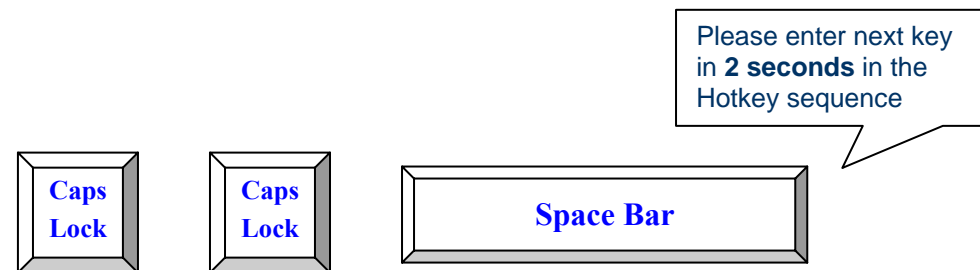

Example #2 – To switch to Bank 1 (Port1), press “**Caps Lock**”, “**Caps Lock**”, and “**1**”, “**0**”, “**1**”.

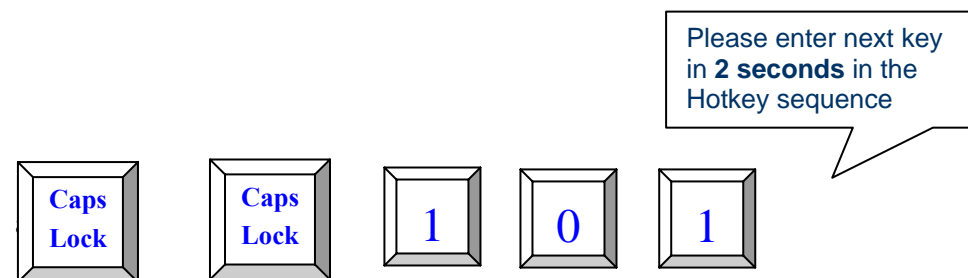

Recommended Power ON sequence as follows: Monitor, KVM Switch, finally Computer.