



Datenblatt - Fiche technique - Data sheet


21.99.0805



VALUE S/FTP-(PiMF-)Patchkabel konf., Kat. 6, grau, 5 m

Cordon VALUE Cat.6 S/FTP (PiMF) confectionné gris, 5,0m

VALUE S/FTP (PiMF) Patch Cord, Cat.6, grey, 5 m

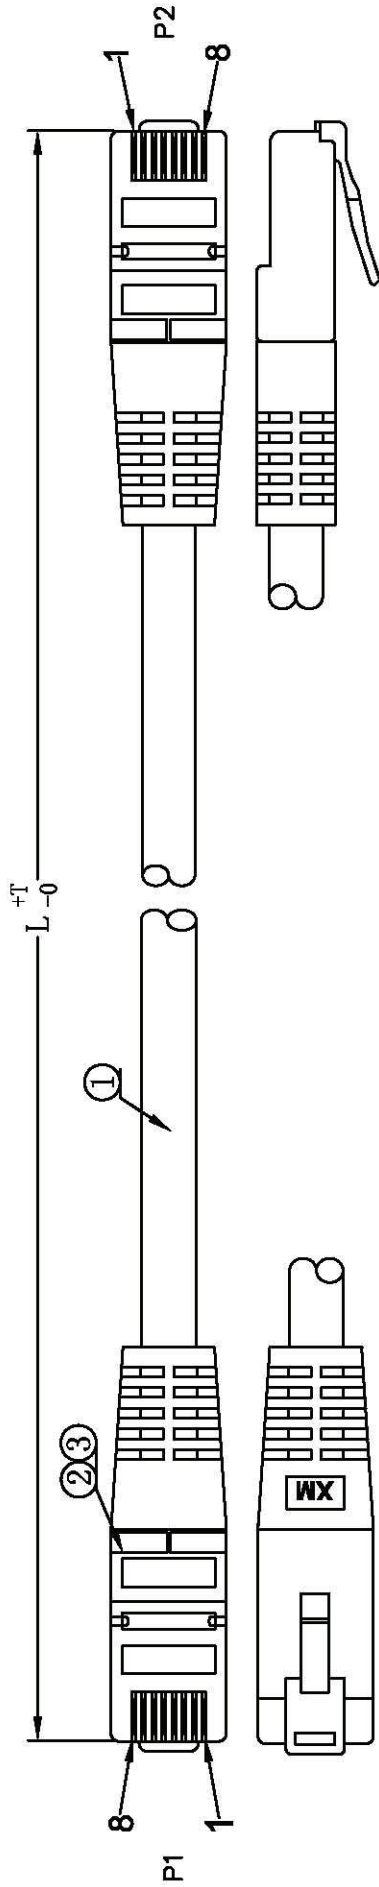


- NOTE:
- 1. 100% OPEN SHORT, MISS WIRE TEST
 - 2. PRINT BLACK WORD:
 - CAT. 6 SSTP 4×2×AWG27/7 PIMF ISO/IEC 11801 & EN 50173 TIA/EIA 568 B. 2-1
 - 3. ROHS & Reach COMPLIANT
 - 4. minimum of the bending radius is 50mm (suitable for all meters)

MATERIAL LIST:

③	OVER MOLD	PVC COLOR:see the chart	2	
②	CONNECTOR	RJ45 8P8C SHIELDED, THE PIN GOLD PLATED 3U"	2	
①	CABLE	CAT. 6 SSTP 27AWG (7/0.135Bare Copper*IP+AL-Foil)*4PAIRS+Braid (0.12mm/5/16) AL-MG JACKET:PVC/Colour:see the chart OD:6.2±0.2mm	1	

NO.	PARTS NAME	QTY	REMARK	DATE	REV.
	SPECIFICATION STANDARD			2012-01-10	A2
				2011-11-16	A1
	NEW			2010-06-29	A
BY	CHK		REVISION RECORD MODIFICATION		

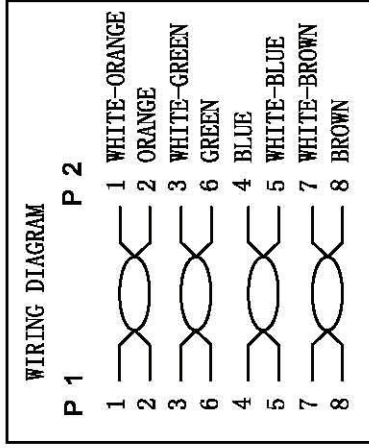

Rotronic Co., Ltd.

VALUE Cat. 6 S/FTP Patch Cord			
ITEM NO.		See The Chart	
		UNIT	MM
DRAWN BY	CHECK BY	APPRO BY	DATE
			2012-01-10

