



INLINE® SAS CABLE

Mini SAS SFF8087 to 4x SATA, Crossover, OCF

SAS cable, Mini SAS SFF8087 (36pin) to 4x SATA, „Crossover“ assignment (forward, OCF), for connecting drives or backplanes to controller with SFF8087 connector.


Note

Please note the assignment of this cable! Depending on the circumstances at the existing equipment you need the cables 27620 or 27620A with „straight“ 1:1 connection instead (reverse, OCR). Please inform yourself accordingly in advance with the respective equipment manufacturers. Only when using the correct assignment a proper connection is established.


Item No.	Length	EAN
27610C	0,50 m	4043718251827
27610	0,75 m	4043718113613
27610A	1 m	4043718288120

Technical Data	
Brand:	InLine®
Side A:	Mini SAS SFF-8087 plug
Side B:	SATA plug
Signal:	Data
Type:	Mini SAS
Type of packaging:	InLine® bag 20103A
UL:	No
Variant:	1:1 assignment

27610

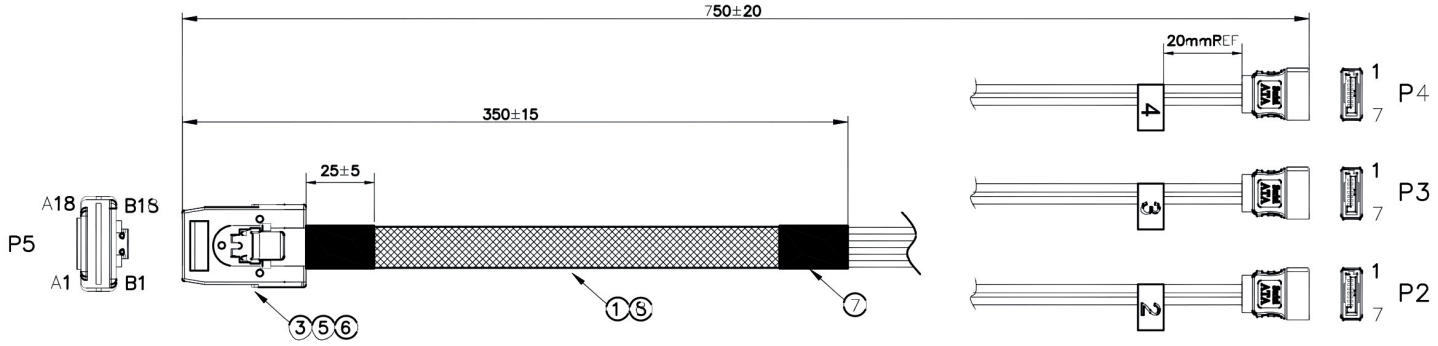



PIN ASSIGNMENT:

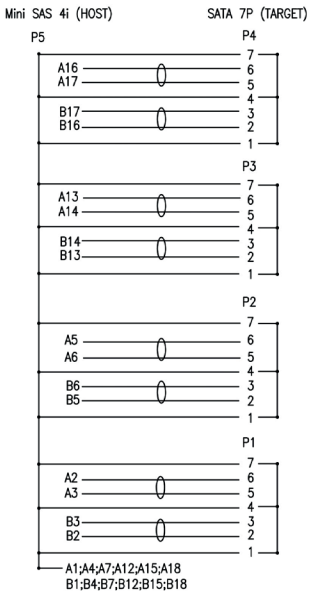


NO.	PART NAME	SPEC DESCRIPTION
9	LABEL	LABEL PRINT P1 & P2 & P3 & P4
8	WOVEN SLEEVE	WOVEN SLEEVING TUBE BLACK
7	H.S.T	HEAT SHRINK TUBE BLACK ID: 9.5mm
6	PE	PE LOW DENSITY
5	PBT	PBT BLACK
4	PVC	PVC 45% BLACK UL94V-0
3	CONN 1	MINI SAS 4i PLUG CONTACT: G/F W/LATCH W/PCB
2	CONN 2	SATA 7P RECEPTACLE BLACK CONTACT: G/F
1	CABLE 1	(30AWG*2C+2D)*2 5.8*1.85mm RED L=725mm

27610A

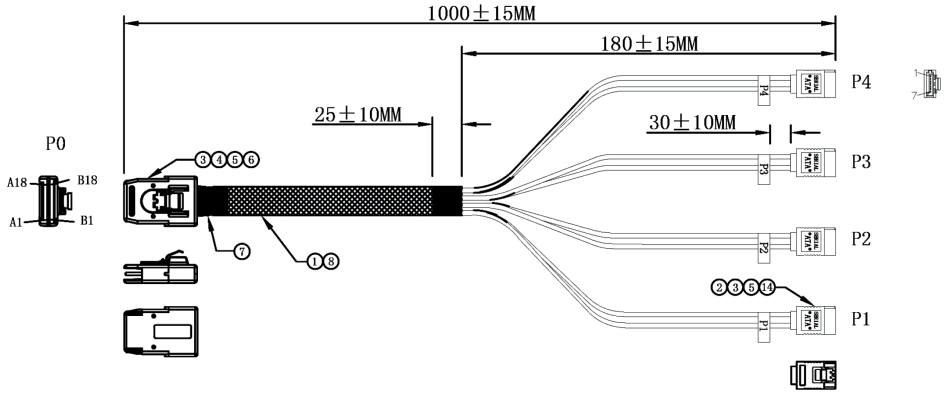

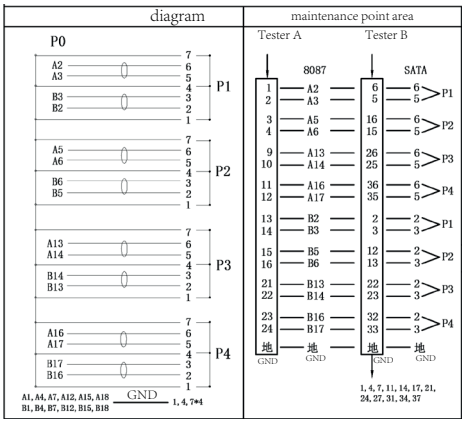

cable cutting requirement

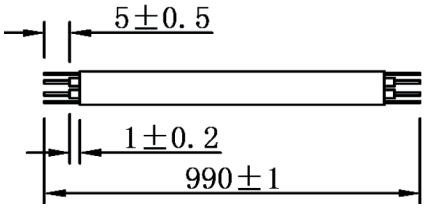

Electrical characteristics:

a. 100% OPEN & SHORT TESTING


b. WITH STANDING VOLTAGE:DC 300V 0.01Sec

c. INSULATION RESISTANCE:10M Ohm(Min)


d. CONDUCTIVE RESISTANCE: 2Ohm(Max)

e. Characteristic impendance 100ohms

27610C

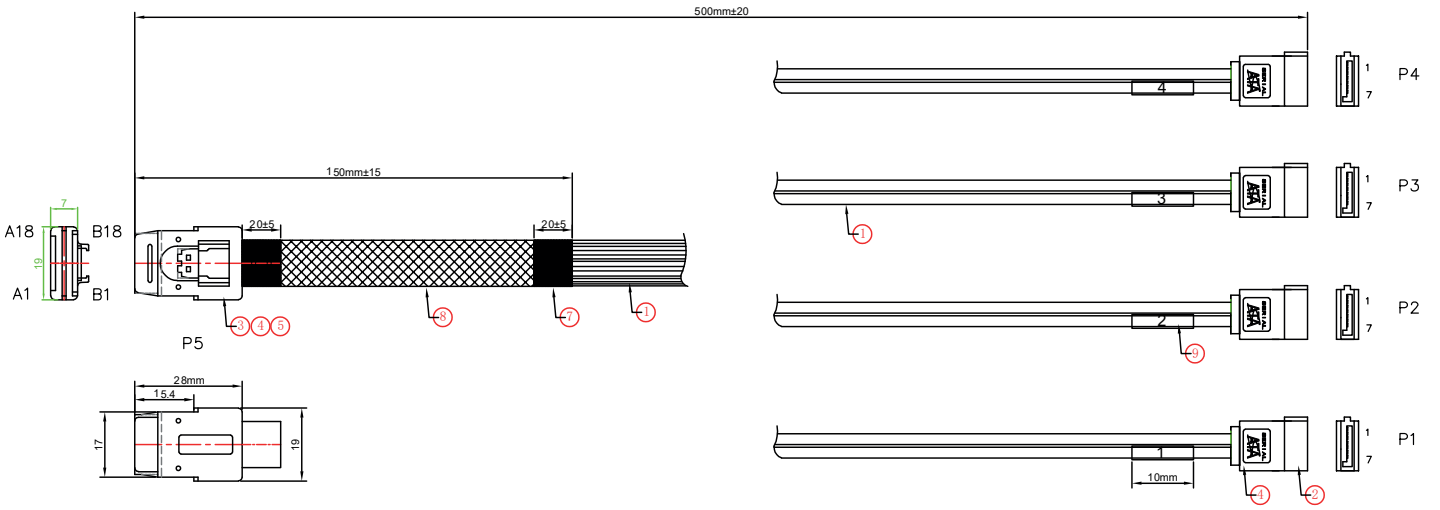

SAS8087 SATA 7P x4

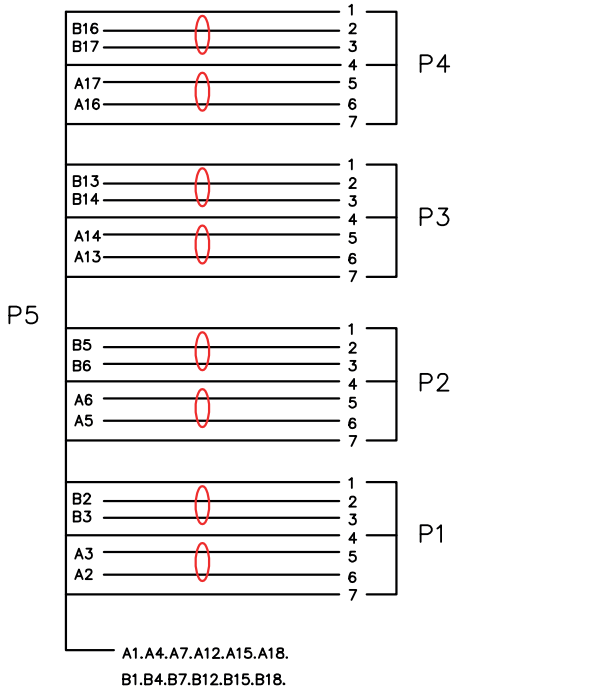

9	LABEL PRINT (P1 P2 P3 P4)
8	WOVEN SLEEVING TUBE BLACK
7	HEAT SHRINK TUBE BLACK ID:9.5mm
6	PE LOW DENSITY
5	PBT BLACK
4	PVC 45P BLACK UL94V-0
3	MINI SAS 8087 CONNECTOR
2	SATA 7P RECEPTACLE BLACK CONNECTOR
1	CABLE (30awg+2C+2D)*2 5.8*.1.85mm RED L=525mm

If you have any further questions, please contact marketing@inline-info.com www.inline-info.com/en/

Disclaimer
InLine® is a brand of INTOS ELECTRONIC AG | Siemensstraße 11 | D-35394 Gießen

Documentation © 2024 INTOS ELECTRONIC AG
All rights reserved. No part of this document may be reproduced in any form or by any means, electronic, mechanical or chemical, without the prior written permission of the publisher.
It is possible that this document may still contain typographical faults or misprints.

However, the information in this deocument will be checked regularly and corrections will be made in the next edition. We accept no liability for errors of a technical or printing nature and their consequences. All trademarks and industrial property rights are acknowledged. Changes in the sense of technical progress can be made without prior notice. Our products, including packaging, are not toys, they may contain small parts and sharp objects.

Please keep away from children.