



Datenblatt - Fiche technique - Data sheet

11.04.5380





ROLINE VGA-Kabel HD15 ST - BU mit Ferritkern, 30,0m

ROLINE HD15 M/HD15 F avec noyaux de ferrite, 30,0m

ROLINE HQ VGA Cable + Ferrite, HD15, M/F, 30 m

| | |
|--------------|--------|
| CUSTOMER NO: | REMARK |
| | |

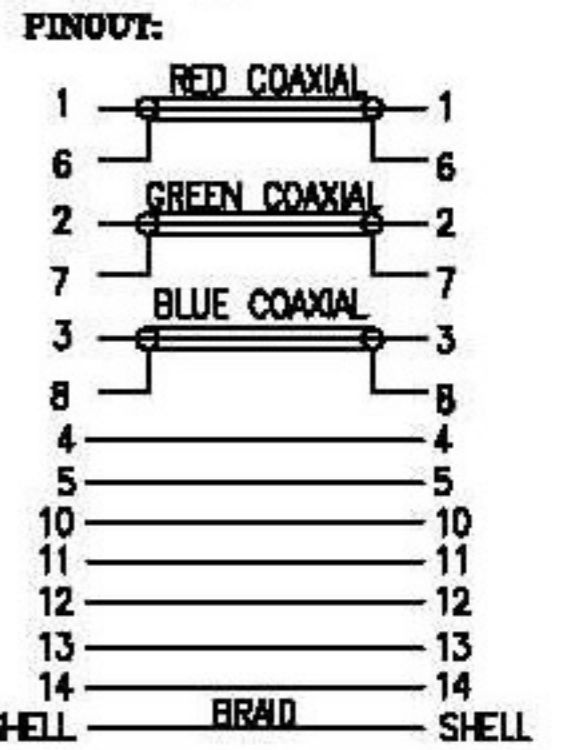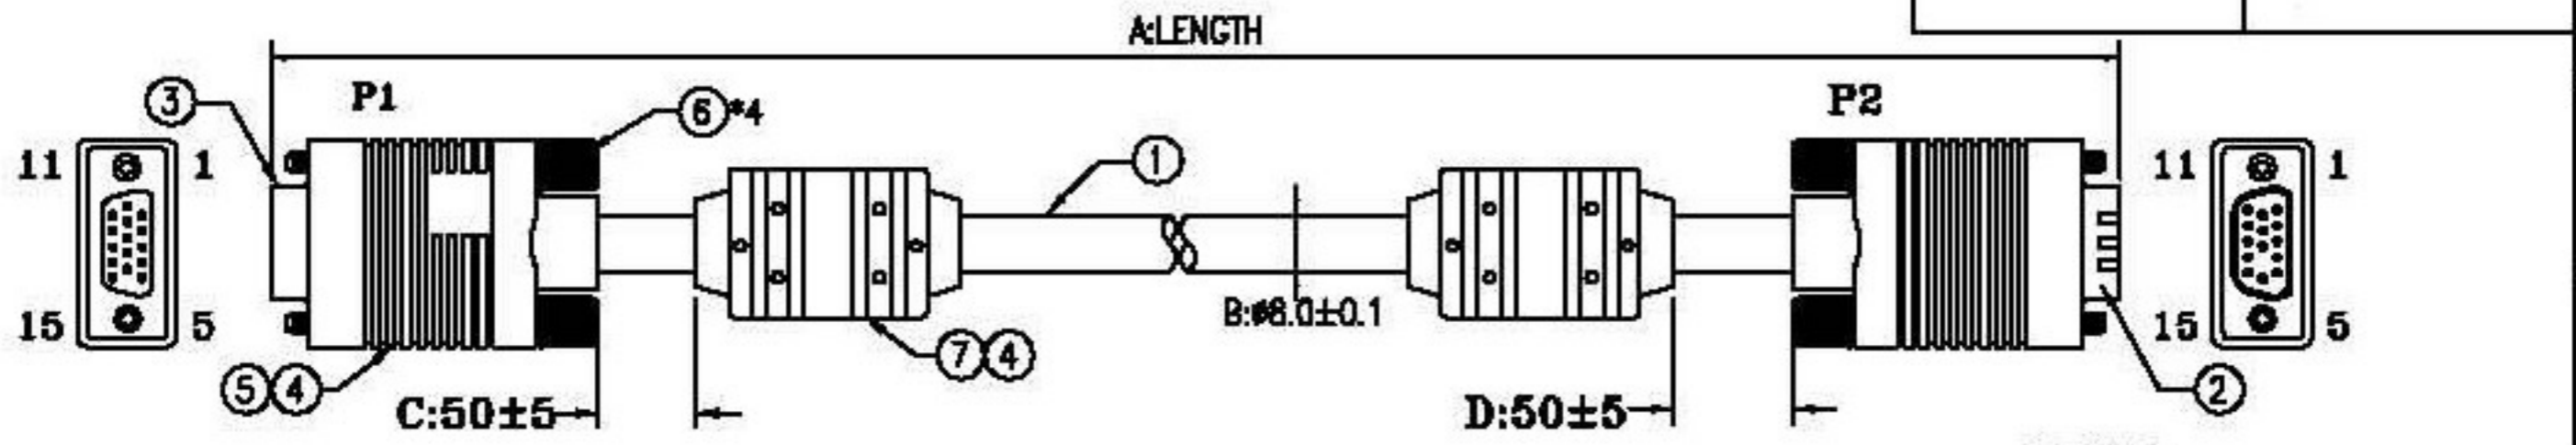

NOTE:



- 1) PRIMARY DIM:A,C,D
- 2) FULLY COPPER FOIL SHIELD 360°.
- 3) CABLE AND MODEL COLOR:BLACK
- 4) RoHS COMPLIANT

| | |
|----|---|
| 14 | NON UL PVC TUBE OD:2.3MM BLACK 6PCS RoHS |
| 13 | UL HEAT SHRINK TUBE BLACK OD:1.5mm RoHS 6PCS |
| 12 | UL HEAT SHRINK TUBE BLACK OD:3.0mm RoHS 6PCS |
| 11 | SOLDER WIRE RoHS |
| 10 | CABLE TIE BLACK 12cm RoHS |
| 9 | COPPER W:0.024M RoHS 2PCS |
| 8 | JUMP WIRE 24AWG 3CM RoHS |
| 7 | FERRITE CORE $\phi 17.5 \times 28.5 \times 9.5$ mm RoHS |
| 6 | SCREW: #4-40UNC E:40.2MM BLACK(1101) RoHS |
| 5 | INNER JACKET PE RoHS |
| 4 | OUTER JACKET PVC 45Pa BLACK(1101) RoHS |
| 3 | HDB15F BLUE SOLDER TYPE TERMINAL PLATED GOLD FLASH RoHS |
| 2 | HDB15M BLUE SOLDER TYPE TERMINAL PLATED GOLD FLASH W/O 9PIN RoHS |
| 1 | UL2919 28#*3COAX+28#*7C+AL+MY+B(1/65%)+D BALCK(1101) OD:8.0MM LENGTH RoHS |

| A | FIRST EDITION | He X.Lin | 18/04/09 | | | | | | | | | | |
|---|---------------|------------------------------------|-----------------|---------------|------------------|---------------|-------------------|---------------|----------|---------------|---|------------------------------------|--|
| REV. ECR | DESCRIPTION | C.N. | DATE | | | | | | | | | | |
| <p>THE DESIGN AND SPECIFICATIONS ARE THE PROPERTY OF ROTRONIC CO., LTD. ANY REPRODUCTION OR USE OF THIS DESIGN WITHOUT THE WRITTEN CONSENT OF ROTRONIC CO., LTD. IS STRICTLY PROHIBITED.</p> | | | | | | | | | | | | | |
| <p>THESE DIMENSION SPECIFICATIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.</p> | | <p>TITLE: MONITOR CABLE</p> | | | | | | | | | | | |
| <table border="1"> <tr> <th>DIMENSIONS</th> <th>TOLERANCE</th> </tr> <tr> <td>0.08 TO 30.00mm</td> <td>± 0.10mm</td> </tr> <tr> <td>30.01 TO 80.00mm</td> <td>± 0.15mm</td> </tr> <tr> <td>80.01 TO 100.00mm</td> <td>± 0.18mm</td> </tr> <tr> <td>100.01mm</td> <td>± 0.20mm</td> </tr> </table> | DIMENSIONS | TOLERANCE | 0.08 TO 30.00mm | ± 0.10 mm | 30.01 TO 80.00mm | ± 0.15 mm | 80.01 TO 100.00mm | ± 0.18 mm | 100.01mm | ± 0.20 mm | <p>CHD: CWF.</p> <p>CL: He X.Lin AFWL</p> | <p>PART NO. W28SBK1MFXK</p> | |
| DIMENSIONS | TOLERANCE | | | | | | | | | | | | |
| 0.08 TO 30.00mm | ± 0.10 mm | | | | | | | | | | | | |
| 30.01 TO 80.00mm | ± 0.15 mm | | | | | | | | | | | | |
| 80.01 TO 100.00mm | ± 0.18 mm | | | | | | | | | | | | |
| 100.01mm | ± 0.20 mm | | | | | | | | | | | | |
| MATERIAL: | WORK: | SHEET 1/2 | REV. A | | | | | | | | | | |
| FINISH: | | UNIT MM | SIZE A4 | | | | | | | | | | |

| | |
|--------------|--------|
| CUSTOMER NO: | REMARK |
| | |

| 客戶料號 | 長度(M) | 包裝方式 | 紙箱尺寸 | | | 裝箱數量 |
|------------|-------|---------------------|-------|-------|-------|------|
| | | | 高(cm) | 長(cm) | 寬(cm) | |
| 11.04.5352 | 2.0 | 吊卡+PE袋(8*10*0.08mm) | 20 | 37 | 30 | 20 |
| 11.04.5353 | 3.0 | 吊卡+PE袋(8*10*0.08mm) | 17 | 46 | 30 | 20 |
| 11.04.5356 | 6.0 | 吊卡+PE袋(8*10*0.08mm) | 17 | 46 | 30 | 10 |
| 11.04.5360 | 10 | PE袋(9*14*0.08mm) | 20 | 32.5 | 25 | 5 |
| 11.04.5370 | 20 | PE袋(12*14*0.08mm) | 18 | 26 | 26 | 2 |
| 11.04.5380 | 30 | PE袋(14*16*0.08mm) | 18.5 | 36.5 | 30 | 2 |

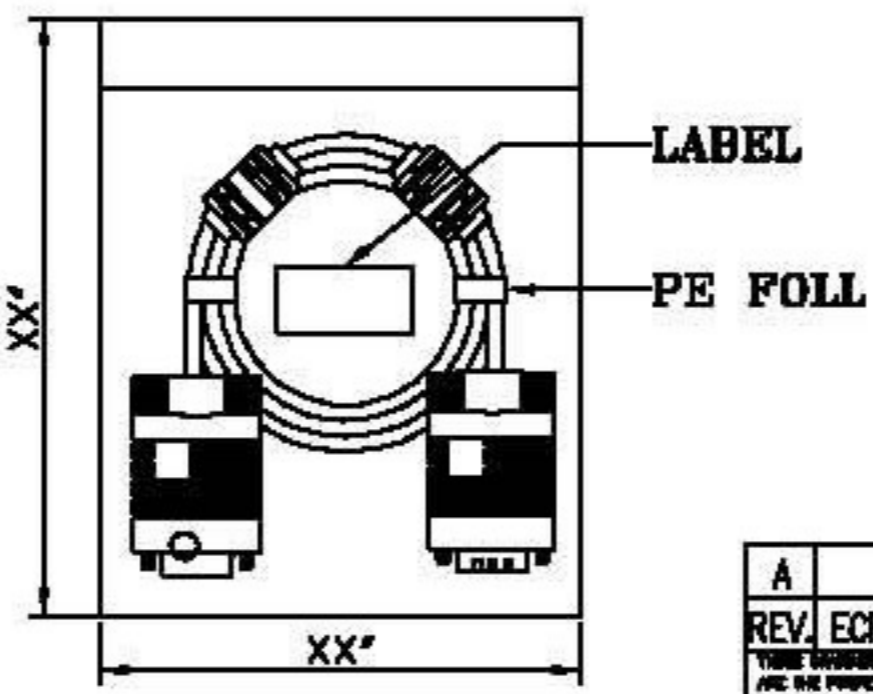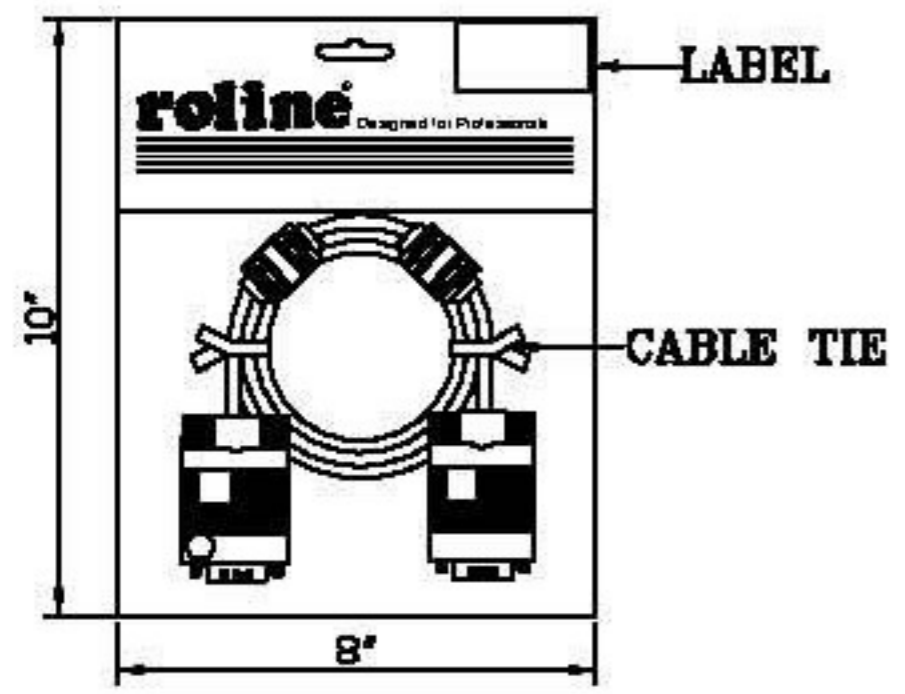

- NOTE:
- 1)線材長度和PE BAG規格參表格.
 - 2)貼紙由業務提供.
 - 3)各長度的線材, 紙箱尺寸和裝箱數量參上表格.
 - 4)產品符合RoHS標準.

| | | | |
|---|---------------|--------------------------|-------------|
| A | FIRST EDITION | He X.Lin | 18/04/09 |
| REV. ECR | DESCRIPTION | C.N. | DATE |
| <small>THIS DRAWING FOR SUPPLIERS ARE THE PROPERTY OF ROTRONIC CO. LIMITED AND SHALL NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ROTRONIC CO. LIMITED.</small> | | Rotronic Co., Ltd | |
| <small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS (INCHES) TOLERANCES AS FOLLOWS:</small> | | MONITOR CABLE | |
| 0.20 TO 20.00mm | ±0.15mm | DRWD. | APP. |
| 20.01 TO 80.00mm | ±0.20mm | DR. | APP. |
| 80.01 TO 100.00mm | ±0.30mm | He X.Lin | |
| 100.01mm | ±0.50mm | PART NO. | W28SBK1MPXX |
| MATERIAL | | SCALE | SHEET 2/2 |
| FRESH | | UNIT | MM |
| | | PAGE | A4 |
| | | REV. | A |